

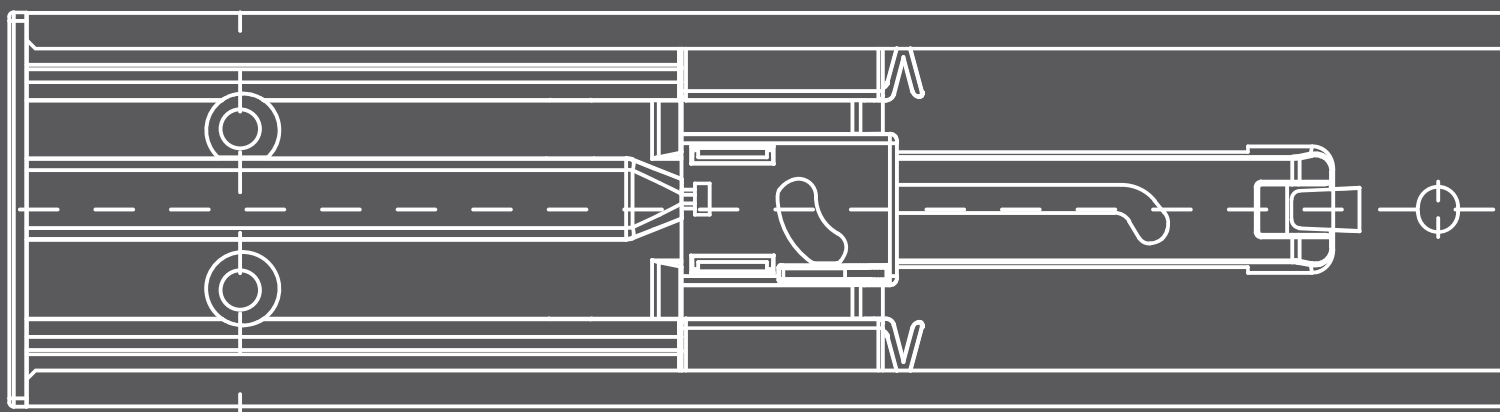
HONGLI HARDWARE

鸿丽五金





产品目录 Catalog

专业家居五金制造商
Professional Furniture Hardware Manufacturer



鸿丽家具五金智慧赋能
让家具产品更具优势

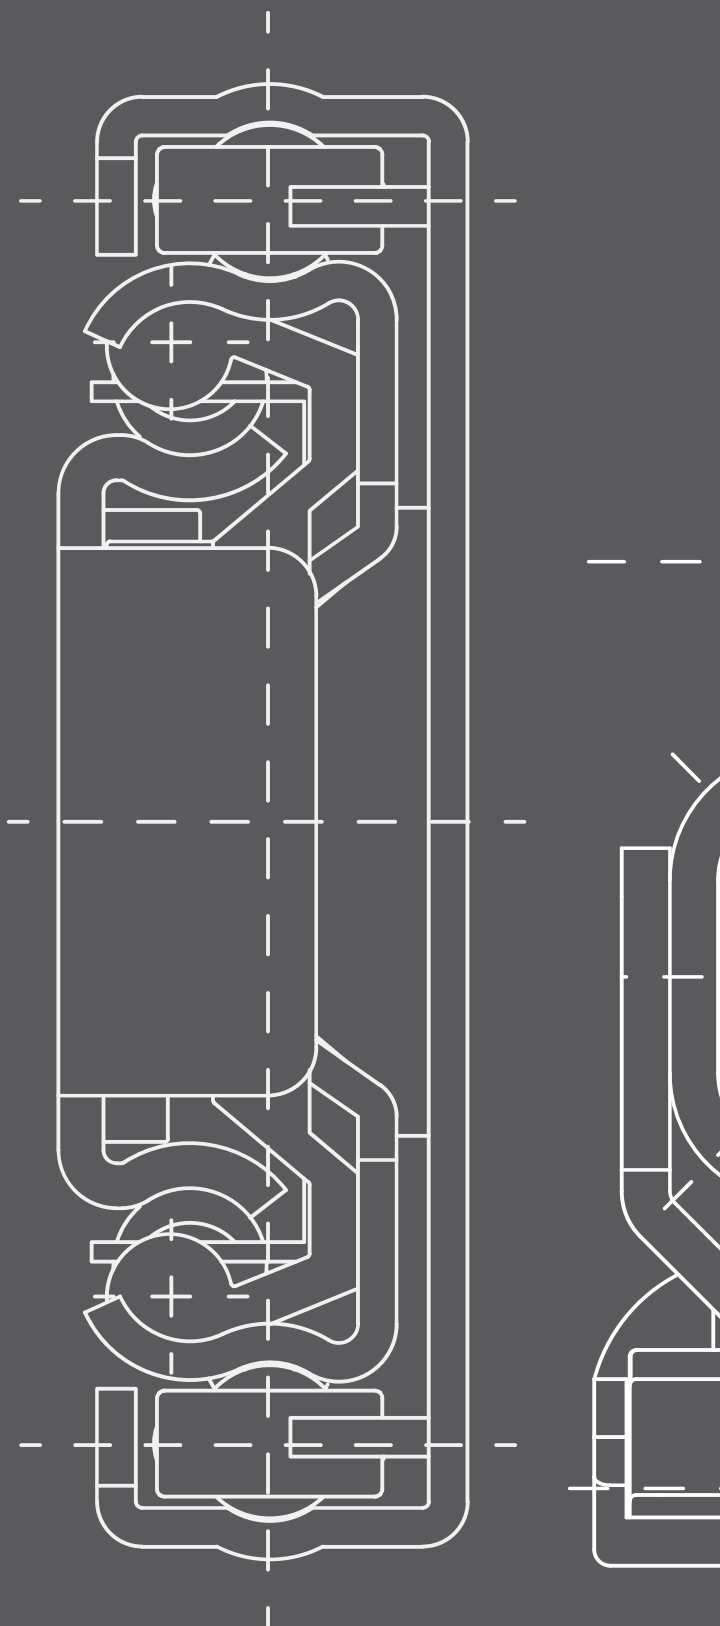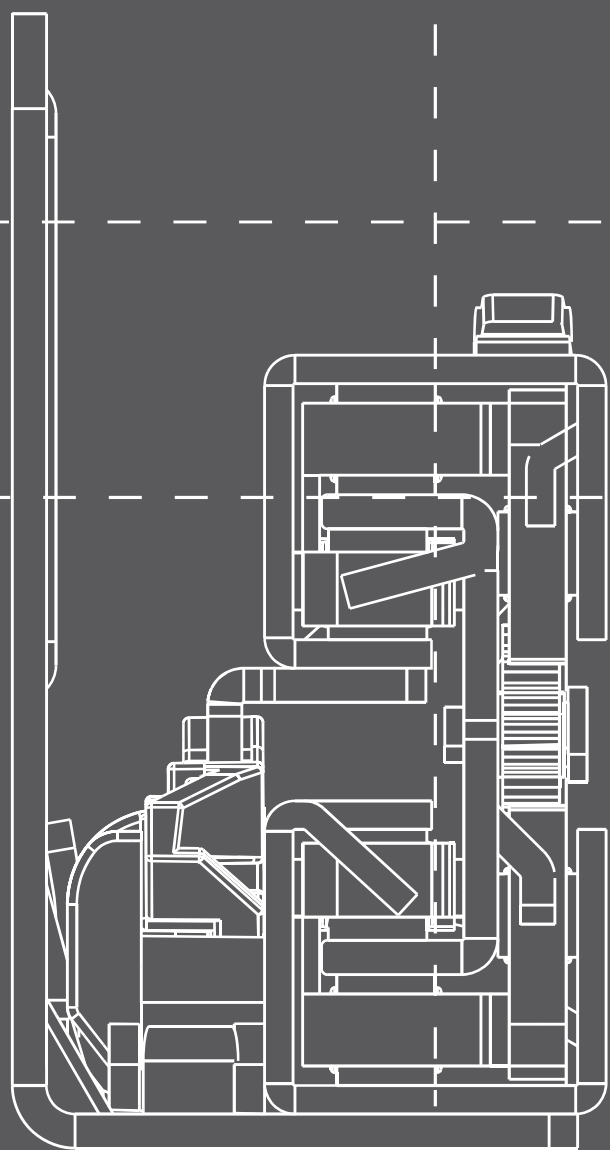



诚意·正心
用心·智造

Excellence in Motion
Leading the AGE

滑动卓越
引领时代

广东鸿丽金属制品有限公司

自1993年, 鸿丽起源于顺德勒流镇新明大道, 原名“鸿宇五金”; 创业之初, 由创始人两兄弟带领着十多名员工以生产铰链合页五金件为主;

随着不断的更新扩大, 鸿丽在90年代末开始陆续引入先进滑轨生产设备, 成为行业内首批引进进口先进五金导轨生产线的企业之一;

于2010年, 鸿丽搬迁至勒流众涌工业区新工厂, 工厂面积扩大4倍以上, 人员也增至400-500人, 为研发更高端精密五金产品(隐藏滑轨, 骑马抽, 金属抽屉), 新工厂采用国际标准化质量管理及全新先进生产设备, 进军高端家具五金市场, 让鸿丽在行业内更具优势!

Hongli was found by two brother since 1993 in Shunde Leliu. Initially named "Hongyu" Hardware, with a team of over ten employees, focusing on the production of hinge hardware.

With continuous upgrade and expansion, Hongli began to imported High Precision Roll Forming Slide Equipment in the late 1990s, becoming one of the first factories in the industry to produce furniture slide.

In 2010, Hongli relocated to a new base in the Industrial District in Leliu, expanding its factory area to more than four times its original size and increasing its workforce to 400-500 employees. Committed to ensuring the highest standards of quality and management, we have positioned ourselves to success in the high-end furniture hardware market. Specializing in the production of Concealed Slides, Ball Bearing Slides, and Metal Drawers, we stand poised to redefine industry standards and set new benchmarks for craftsmanship and innovation.





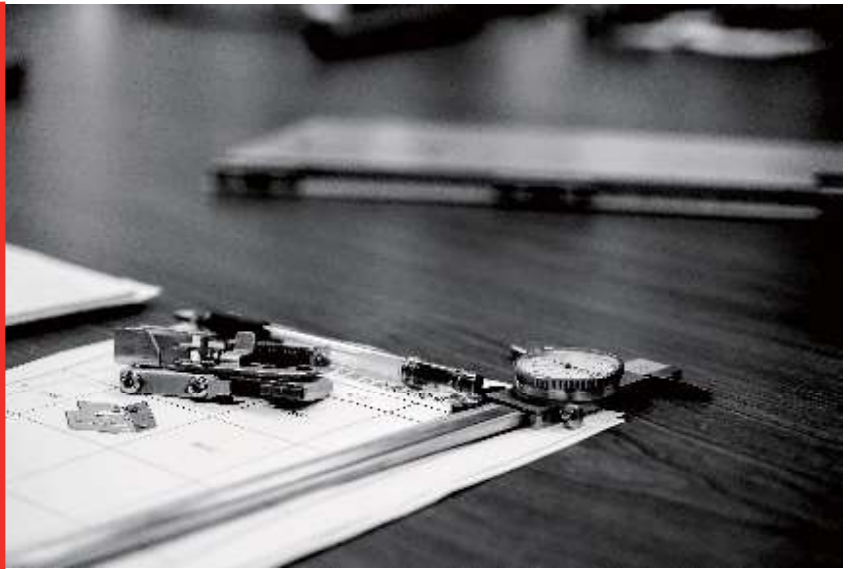
公司简介 Company Introduction



研发 R&D
团队 Team

30+ 名

专业工业设计师
多功能实验室
采用最新版设计软件(SW/3DM)
30+ Engineering Designers
Multipurpose Lab
Latest Software(SW/3DM...)



设备 Equipment
配置 Capability

50+ 组

进口精密成型设备
200+精密冲压设备
50+ High Precision
Roll Forming Machines
200+ High Precision
Punching Machines



模具 Tooling
制程 Fabrication

CNC

多台模具制作与加工设备：
深孔钻
电火花机
普通铣床
数控车床
磨床
Multiple Tooling Machine

仓储 Warehouse
系统 System

2000m²+

现代化仓储货架
Warehouse Storage Rack

品质 Quality
管控 Management

50+ 名

质检人员
欧洲标准检测实验室
密集式恒温资料柜
多台先进检测设备：
寿命测试仪/色差检测仪/厚度检测仪...
50+ Quality Inspectors
European Standard Test Lab:
-Lifecycle Testing Machine
-Color Deviation Detector...

质量同行 诚信同心 未来同建

质量是企业 and 行业生存之本，立足之基，实力所在。

质量高则兴，质量低则亡，对于企业和行业，可以说“质量即命运”。

广东鸿丽产品经层层把关及检测，带给您不一样品质五金！



做行业的引领和先行者

从产品研发到技术创新,从工艺制造到品质检测,
鸿丽坚持以科技创新提升品牌竞争力,
不断推出技术领先的导轨和铰链,
为消费者提供全新的,高品质的生活体验.



DESIGN AND FUNCTIONALITY

设计· 功能

我们忠实于产品的设计· 功能的特性，精选原料
物材及设备装置，确保精良装备将我们富有创意
的想法变成优秀产品。

*We are committed to our product design, features,
materials and equipment to ensure that our creative
ideas are turned into good products with excellent
equipment*



CONVENIENCE OF SERVICE

服务· 便捷

我们忠实于客户对服务· 便捷的需求，优化公司
架构及工作流程，为客户节约时间及成本。

*We are committed to our customers' demand for
service and convenience, optimize the company's
structure and workflow, and save time and costs for our
customers.*



PERFORMANCE & PRICE

性能· 价格

我们忠实于市场对性能· 价格的要求，通过各环
节的成本管理，为客户提供品类丰富、性价比超
值的金属产品。

*We are faithful to the requirements of the market for
performance and price, through the cost management
of each link, to provide customers with a rich category,
the value of metal products.*

Leading the AGE · 引领时代

目录 CONTENTS



HONGLI 鸿丽



金属抽屉系列
Metal Drawer Series

Page 01-30

#Double Wall #Single Wall #Slim Wall



隐藏轨系列
Undermount Slide Series

Page 31-66

#Full Extension #Single Extension #Soft Close
#Push to Open #PTO+SC #Synchronize



钢珠隐藏轨系列
Ball Bearing
Undermount Slide Series

Page 67-74

#V2 #V6 #Full Extension #Single Extension



普通钢珠轨系列
Ball Bearing Slide Series

Page 75-88

#45mm #37mm #35mm #27mm #53mm

金属抽屉系列
Metal Drawer
Series



RIDGEBOX Pro

睿多纳·旗舰型

Slim82

精英82型

深灰色 Dark Grey

多种颜色可供选择

浅灰色 Light Grey

白色 White



型号 Model: KB01L

抽屉高度Height: 90MM/低抽屉Low





- 长度规格: 250mm-550mm
- 动态负荷: 35kg @ 18"
- 特点: 全展出, 缓冲闭合, 低噪音滑行, 抽屉免工具快速安装/拆卸
- 面板调节: 三维(↑/↓/←/→/前/后)
- Length: 250mm-550mm
- Dyanamic Loading Capacity: 35kg @ 18"
- Feature: Full Extension, Soft Close, Silent ride, easy assemble/remove
- Front Pannel Adjustment: 3D(↑/↓/←/→/ F/R)

颜色Color

编号Color Code	RAL色号RAL Code	色名Color Name
9007	RAL 9007	深灰 Dark Grey
9016	RAL9016	珍珠白 Pearl White
7042	RAL7042	浅灰 Light Grey

产品信息 Product Information








规格编号 Size-Part #		
长度 Length	高度Height	编号 Part #
250mm/10in	90mm	KB01L-250
300mm/12in	90mm	KB01L-300
350mm/14in	90mm	KB01L-350
400mm/16in	90mm	KB01L-400
450mm/18in	90mm	KB01L-450
500mm/20in	90mm	KB01L-500
550mm/22in	90mm	KB01L-550

组件编号 Component Part #		
产品组件 Component Set	编号 Part #	
1 全拉出隐藏轨Undermount Slide		
	ZX4801-250	ZX4801-450
	ZX4801-300	ZX4801-500
	ZX4801-350	ZX4801-550
	ZX4801-400	
2 金属侧帮Drawer Side Board		
	KB01LCB-250	KB01LCB-450
	KB01LCB-300	KB01LCB-500
	KB01LCB-350	KB01LCB-550
	KB01LCB-400	
3 前接码Front Connector		
	TJ-250	
4 Logo盖板Cover Cap		
	SL-303	
5 快拆把手Locking Bracket		
	SL-248(2D)	
	SL267(3D)*	
6* 加高杆(长方型)* Galleries(Rect.)*		
	TJ-319	TJ-323
	TJ-320	TJ-324
	TJ-321	TJ-325
	TJ-322	

*选配配件 *Optional Part

型号 Model: KB01L

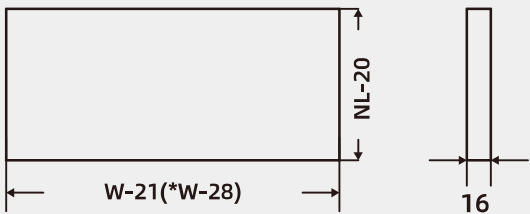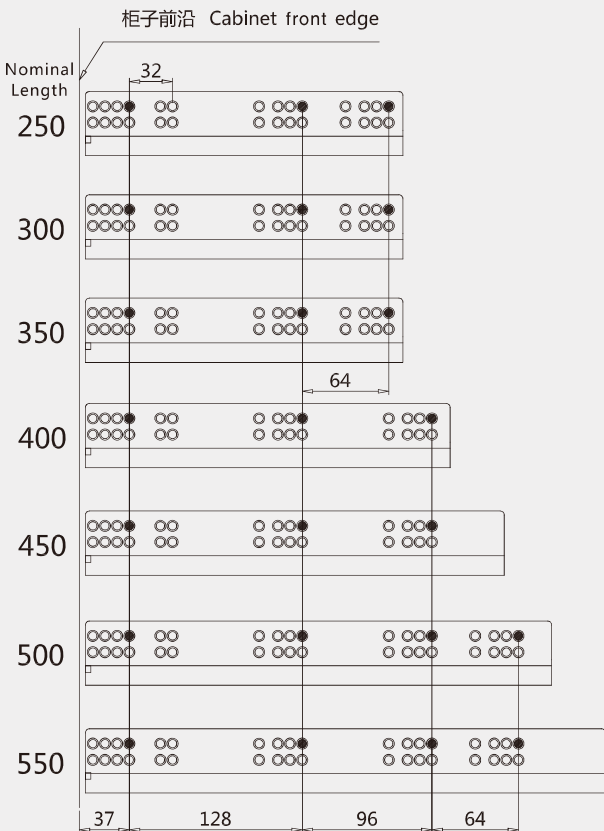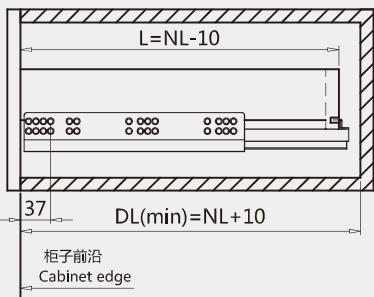安装尺寸 Installation dimension

柜体所需空间 Cabinet space requirement	前面板钻孔尺寸 Front panel drilling dimension	后背板钻孔尺寸 Rear panel drilling dimension
		
底板开板尺寸 Bottom panel cutting dimension	后背板开板尺寸 Rear panel cutting dimension	
		
滑轨安装尺寸 Slide installation dimension	抽屉所需空间 Drawer space requirement	
柜子前沿 Cabinet front edge 	 DL: 柜体内部深度 Cabinet Internal Depth W: 柜体内部宽度 Cabinet Internal Width NL: 滑轨标示长度 Slide Nominal Length	

睿多纳·旗舰金属抽屉
RIDGEBOX Pro
Metal Drawer



型号 Model: KB01M

抽屉高度Height: 128MM/中抽屉Mid



- 长度规格: 250mm-550mm
- 动态负荷: 35kg @ 18"
- 特点: 全展出, 缓冲闭合, 低噪音滑行, 抽屉免工具快速安装/拆卸
- 面板调节: 三维(↑/↓/←/→/前/后)
- Length: 250mm-550mm
- Dyanamic Loading Capacity: 35kg @ 18"
- Feature: Full Extension, Soft Close, Silent ride, easy assemble/remove
- Front Pannel Adjustment: 3D(↑/↓/←/→/F/R)

颜色Color


编号Color Code	RAL色号RAL Code	色名Color Name
9007	RAL 9007	深灰 Dark Grey
9016	RAL9016	珍珠白 Pearl White
7042	RAL7042	浅灰 Light Grey

产品信息 Product Information

规格编号 Size-Part #		
长度 Length	高度Height	编号 Part #
250mm/10in	128mm	KB01M-250
300mm/12in	128mm	KB01M-300
350mm/14in	128mm	KB01M-350
400mm/16in	128mm	KB01M-400
450mm/18in	128mm	KB01M-450
500mm/20in	128mm	KB01M-500
550mm/22in	128mm	KB01M-550




组件编号 Component Part #		
产品组件 Component Set	编号 Part #	
1 全拉出隐藏轨Undermount Slide		
	ZX4801-250	ZX4801-450
	ZX4801-300	ZX4801-500
	ZX4801-350	ZX4801-550
	ZX4801-400	
2 金属侧帮Drawer Side Board		
	KB01MCB-250	KB01MCB-450
	KB01MCB-300	KB01MCB-500
	KB01MCB-350	KB01MCB-550
	KB01MCB-400	
3 前接码Front Connector		
	TJ-250	
4 Logo盖板Cover Cap		
	SL-303	
5 快拆把手Locking Bracket		
	SL-248(2D)	
	SL267(3D)*	


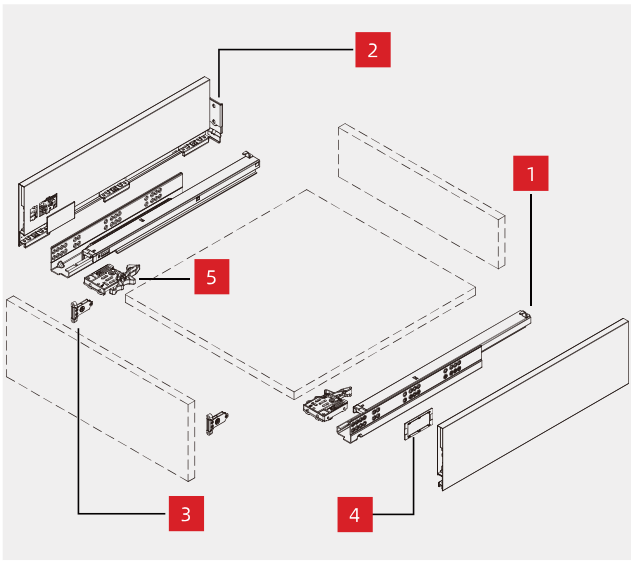
*选配配件 *Optional Part





型号 Model: KB01M

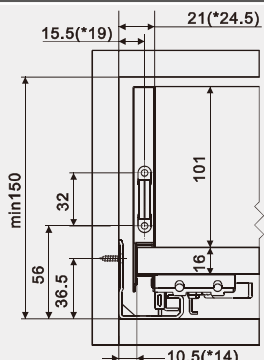安装尺寸 Installation dimension

柜体所需空间 Cabinet space requirement	前面板钻孔尺寸 Front panel drilling dimension	后背板钻孔尺寸 Rear panel drilling dimension
		

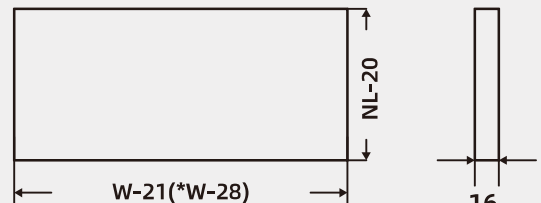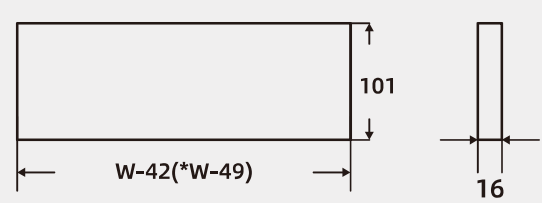底板开板尺寸 Bottom panel cutting dimension	后背板开板尺寸 Rear panel cutting dimension
	

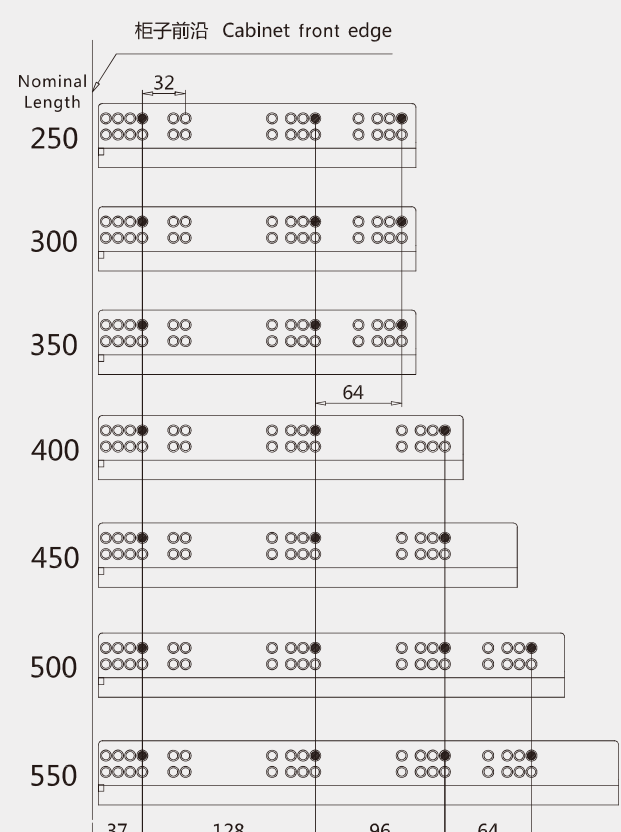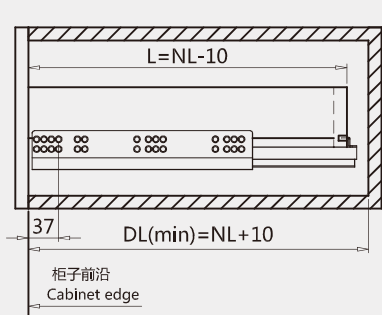滑轨安装尺寸 Slide installation dimension	抽屉所需空间 Drawer space requirement
	
DL: 柜体内部深度 Cabinet Internal Depth W: 柜体内部宽度 Cabinet Internal Width NL: 滑轨标示长度 Slide Nominal Length	

睿多纳·旗舰金属抽屉
RIDGEBOX Pro
Metal Drawer



型号 Model: KB01H

抽屉高度Height: 175MM/高抽屉High



- 长度规格: 250mm-550mm
- 动态负荷: 35kg @ 18"
- 特点: 全展出, 缓冲闭合, 低噪音滑行, 抽屉免工具快速安装/拆卸
- 面板调节: 三维(↑/↓/←/→/前/后)
- Length: 250mm-550mm
- Dyanamic Loading Capacity: 35kg @ 18"
- Feature: Full Extension, Soft Close, Silent ride, easy assemble/remove
- Front Pannel Adjustment: 3D(↑/↓/←/→/F/R)


颜色Color

编号Color Code	RAL色号RAL Code	色名Color Name
9007	RAL 9007	深灰 Dark Grey
9016	RAL9016	珍珠白 Pearl White
7042	RAL7042	浅灰 Light Grey

产品信息 Product Information

规格编号 Size-Part #		
长度 Length	高度Height	编号 Part #
250mm/10in	175mm	KB01H-250
300mm/12in	175mm	KB01H-300
350mm/14in	175mm	KB01H-350
400mm/16in	175mm	KB01H-400
450mm/18in	175mm	KB01H-450
500mm/20in	175mm	KB01H-500
550mm/22in	175mm	KB01H-550




组件编号 Component Part #		
产品组件 Component Set	编号 Part #	
1 全拉出隐藏轨Undermount Slide		
	ZX4801-250	ZX4801-450
	ZX4801-300	ZX4801-500
	ZX4801-350	ZX4801-550
	ZX4801-400	
2 金属侧帮Drawer Side Board		
	KB01HCB-250	KB01HCB-450
	KB01HCB-300	KB01HCB-500
	KB01HCB-350	KB01HCB-550
	KB01HCB-400	
3 前接码Front Connector		
	TJ-250	
4 Logo盖板Cover Cap		
	SL-303	
5 快拆把手Locking Bracket		
	SL-248(2D)	
	SL267(3D)*	
6 上盖板Top Cover Cap		
	SL-320	

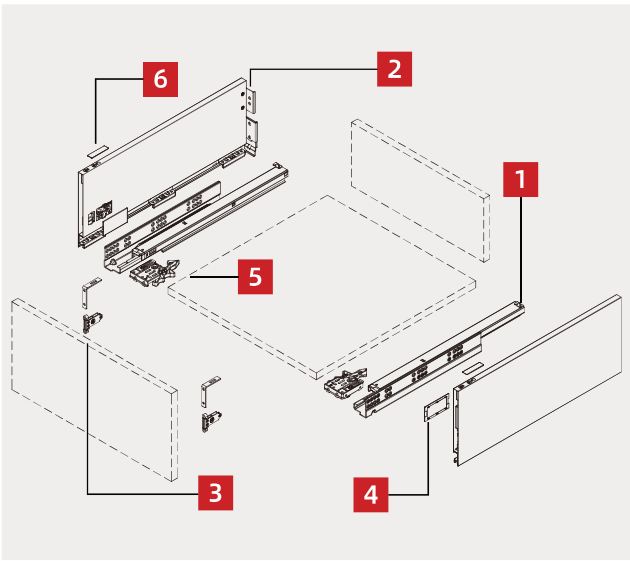

*选配配件 *Optional Part

型号 Model: KB01H

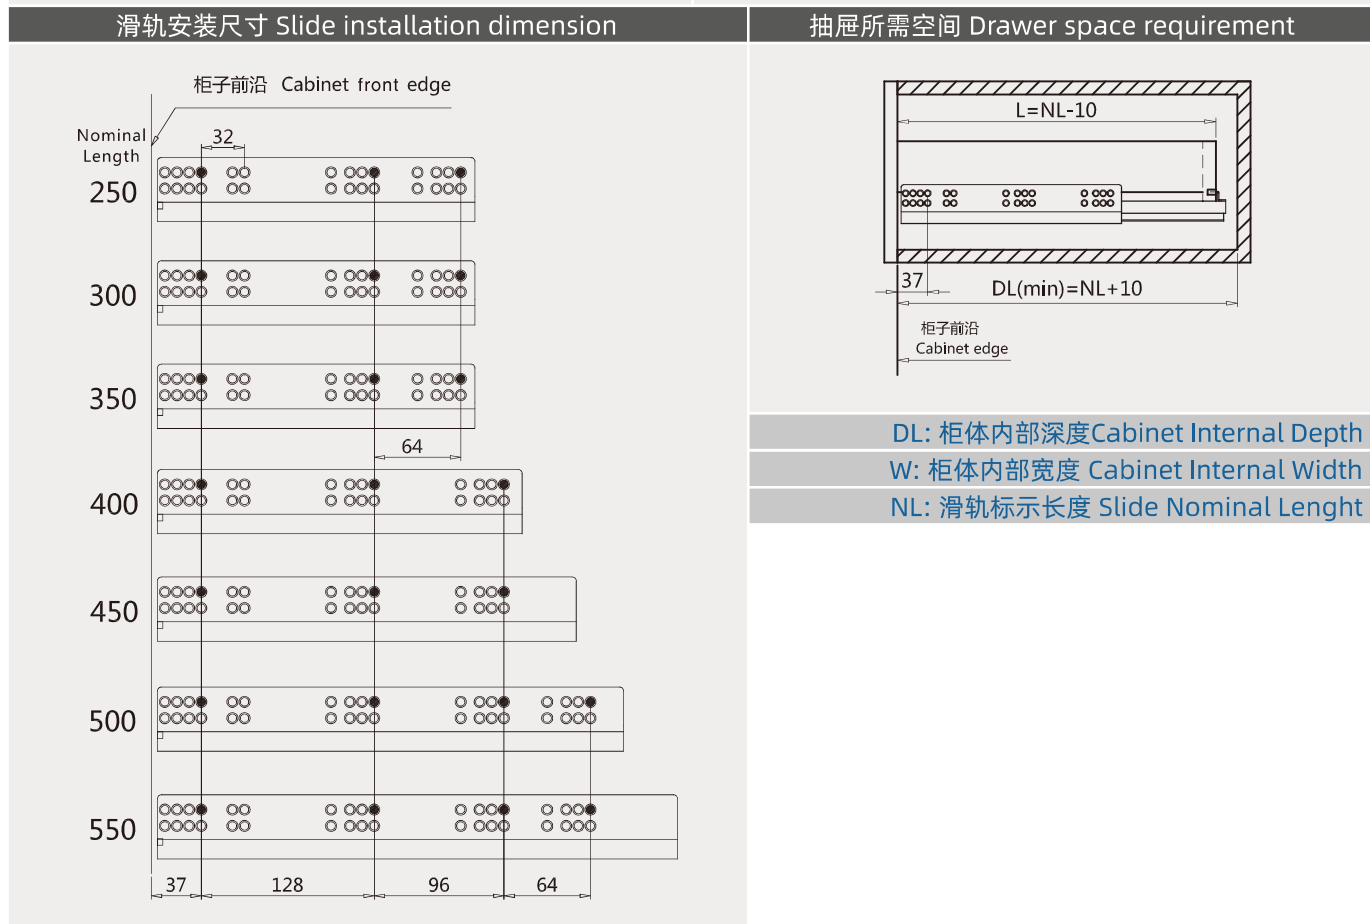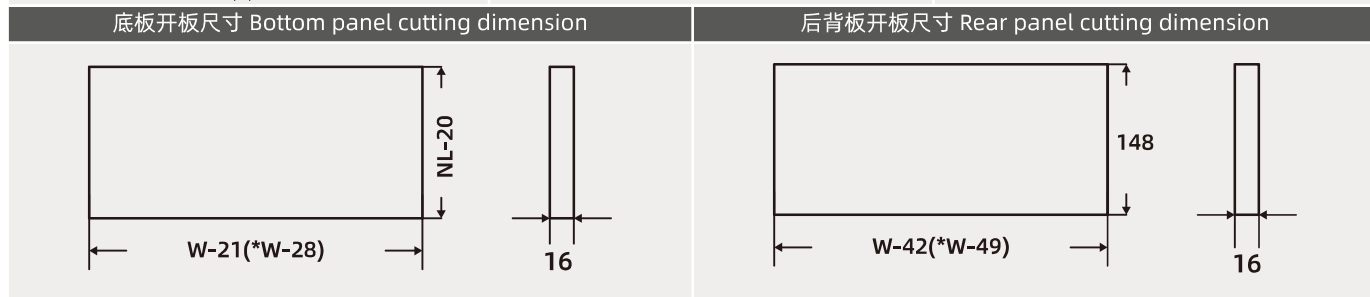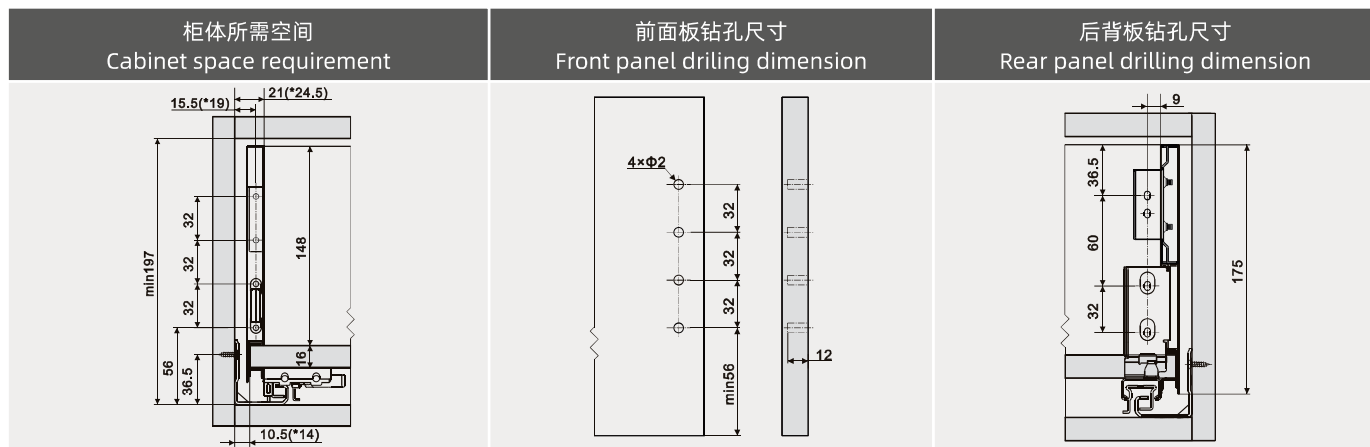安装尺寸 Installation dimension




DL: 柜体内部深度 Cabinet Internal Depth

W: 柜体内部宽度 Cabinet Internal Width

NL: 滑轨标示长度 Slide Nominal Length

睿多纳·纤薄 单板式金属抽屉

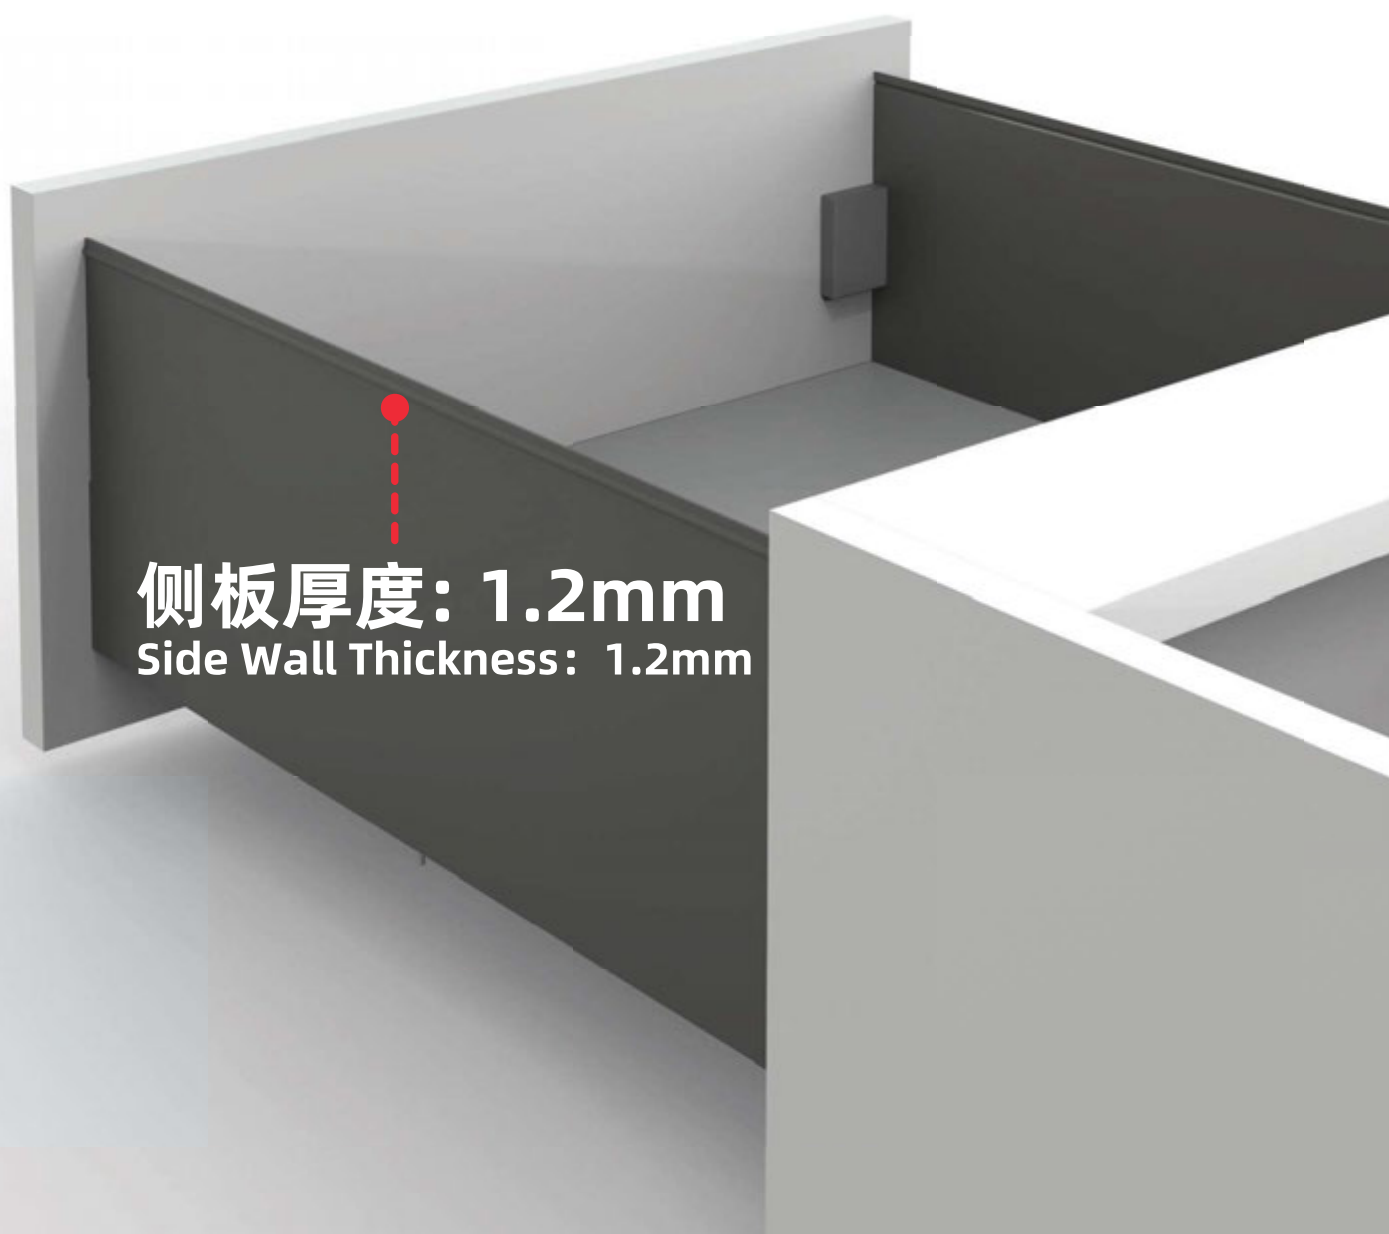RIDGEBOX Air
Single Wall Metal Drawer



侧板厚度: 1.2mm
Side Wall Thickness: 1.2mm

型号 Model: CB01L

抽屉高度Height: 88MM/低抽屉Low




全系列隐藏轨适配All Concealed Runner Adaptable

订购信息 Order Info


请联系销售人员Please contact our salesperson

安装尺寸 Installation dimension


低抽屉柜体所需空间
Low Drawer Cabinet space requirement




中抽屉柜体所需空间
Mid Drawer Cabinet space requirement




高抽屉柜体所需空间
High Drawer Cabinet space requirement



滑轨安装尺寸 Slide installation dimension

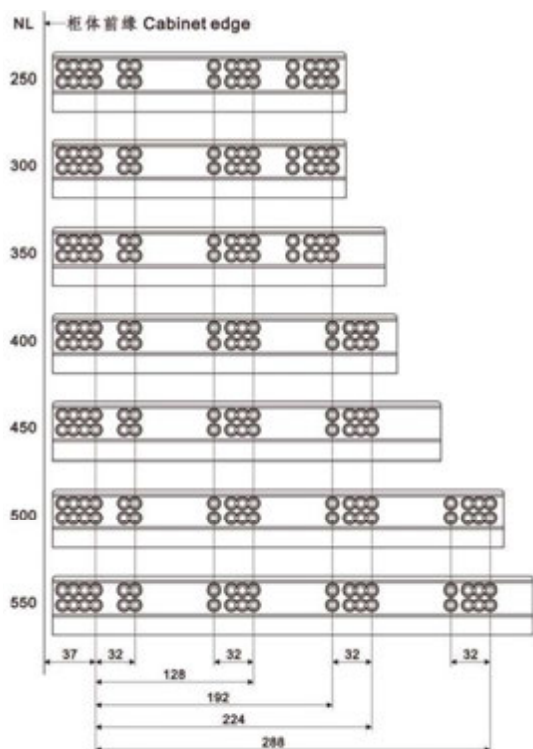

抽屉所需空间 Drawer space requirement

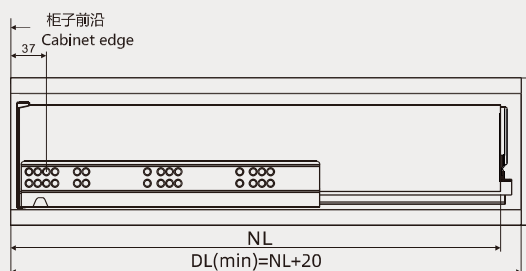

DL: 柜体内部深度Cabinet Internal Depth

W: 柜体内部宽度 Cabinet Internal Width

NL: 滑轨标示长度 Slide Nominal Length

颜色Color

编号Color Code	RAL色号RAL Code	色名Color Name
9007	RAL 9007	深灰 Dark Grey
9016	RAL9016	珍珠白 Pearl White
7042	RAL7042	浅灰 Light Grey

睿多纳·纤薄 | 单板式金属抽屉
RIDGEBOX Air
Single Wall Metal Drawer



型号 Model: CB01M

抽屉高度Height: 128MM/中抽屉Mid




全系列隐藏轨适配All Concealed Runner Adaptable

订购信息 Order Info


请联系销售人员Please contact our salesperson

安装尺寸 Installation dimension


低抽屉柜体所需空间
Low Drawer Cabinet space requirement




中抽屉柜体所需空间
Mid Drawer Cabinet space requirement




高抽屉柜体所需空间
High Drawer Cabinet space requirement



滑轨安装尺寸 Slide installation dimension

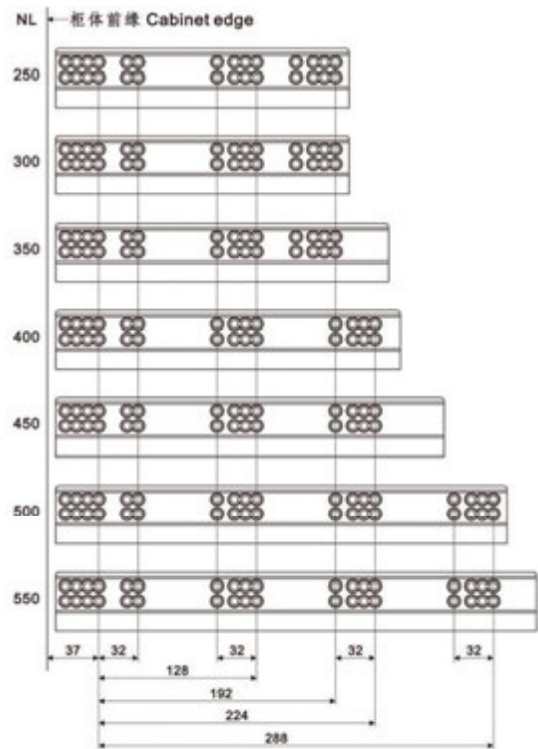

抽屉所需空间 Drawer space requirement

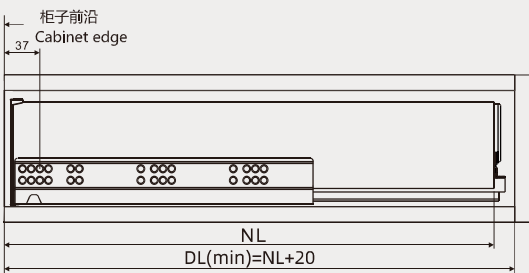

DL: 柜体内部深度Cabinet Internal Depth

W: 柜体内部宽度 Cabinet Internal Width

NL: 滑轨标示长度 Slide Nominal Lenght

颜色Color

编号Color Code	RAL色号RAL Code	色名Color Name
9007	RAL 9007	深灰 Dark Grey
9016	RAL9016	珍珠白 Pearl White
7042	RAL7042	浅灰 Light Grey

型号 Model: CB01H

抽屉高度Height: 158MM/高抽屉High




全系列隐藏轨适配All Concealed Runner Adaptable

订购信息 Order Info


请联系销售人员Please contact our salesperson

安装尺寸 Installation dimension

低抽屉柜体所需空间
Low Drawer Cabinet space requirement




中抽屉柜体所需空间
Mid Drawer Cabinet space requirement




高抽屉柜体所需空间
High Drawer Cabinet space requirement



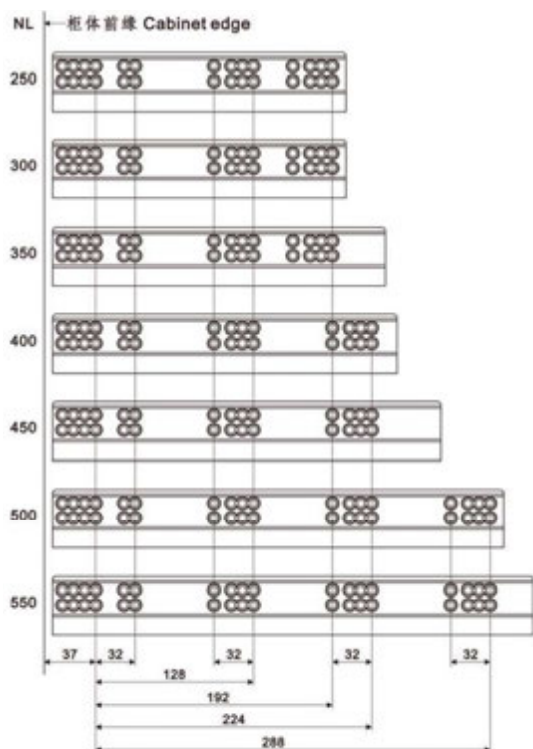滑轨安装尺寸 Slide installation dimension



抽屉所需空间 Drawer space requirement

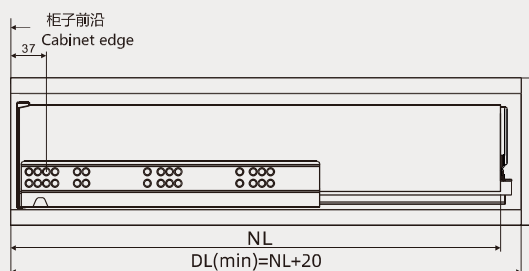

DL: 柜体内部深度 Cabinet Internal Depth

W: 柜体内部宽度 Cabinet Internal Width



NL: 滑轨标示长度 Slide Nominal Length

颜色Color

编号Color Code	RAL色号RAL Code	色名Color Name
9007	RAL 9007	深灰 Dark Grey
9016	RAL9016	珍珠白 Pearl White
7042	RAL7042	浅灰 Light Grey

型号 Model: KB01NL

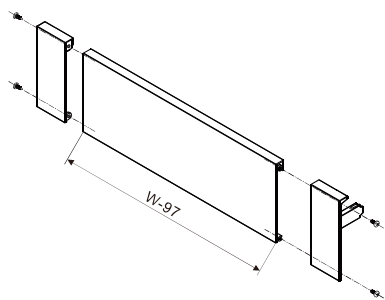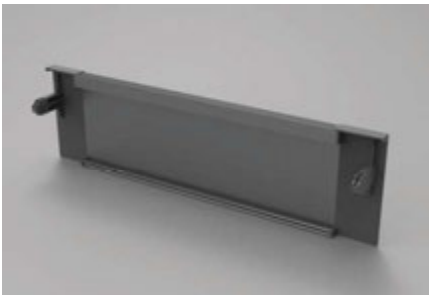抽屉高度Height: 90MM/低抽屉Low






面板裁切尺寸=W(柜体内部宽度) - 97mm

订购信息 Order Code

请联系销售人员Please contact our salesperson

型号 Model: KB01NM

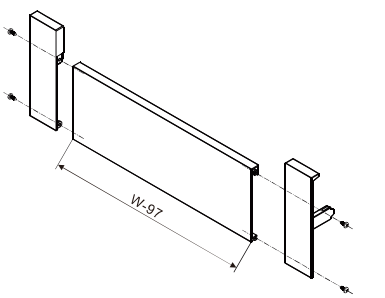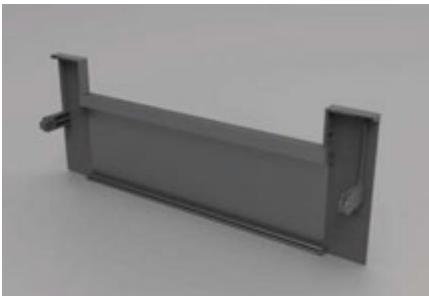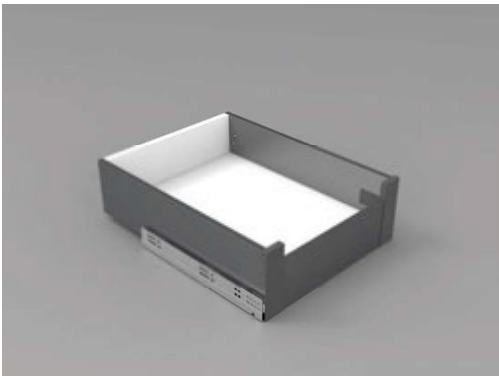抽屉高度Height: 128MM/中抽屉Mid





面板裁切尺寸=W(柜体内部宽度) - 97mm

订购信息 Order Code

请联系销售人员Please contact our salesperson

型号 Model: KB01NH

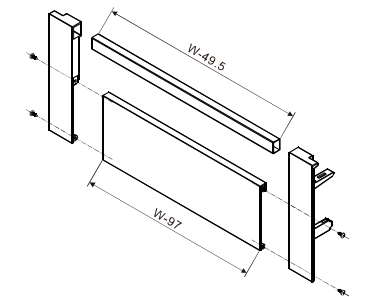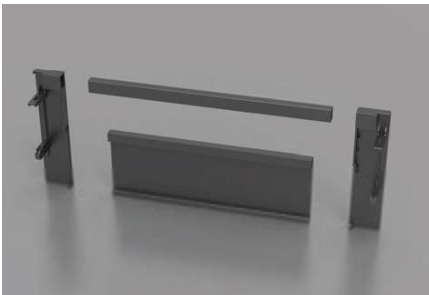抽屉高度Height: 175MM/高抽屉High



面板裁切尺寸=W(柜体内部宽度) - 97mm

订购信息 Order Code




请联系销售人员Please contact our salesperson



颜色Color

编号Color Code	RAL色号RAL Code	色名Color Name
9007	RAL 9007	深灰 Dark Grey
9016	RAL9016	珍珠白 Pearl White
7042	RAL7042	浅灰 Light Grey

型号 Model: KB01N

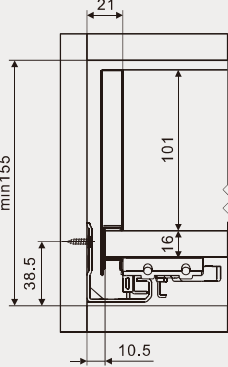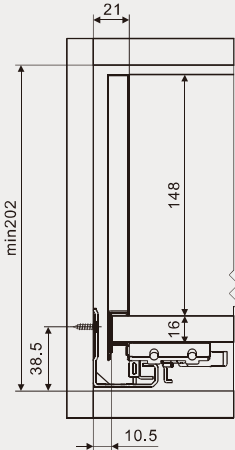安装尺寸 Installation dimension

低抽屉柜体所需空间 Low Drawer Cabinet space requirement	中抽屉柜体所需空间 Mid Drawer Cabinet space requirement	高抽屉柜体所需空间 High Drawer Cabinet space requirement
		

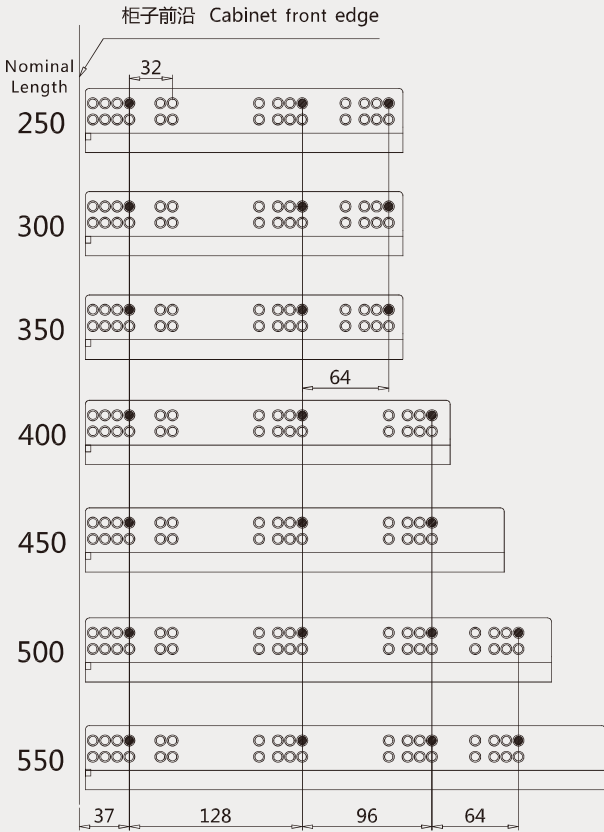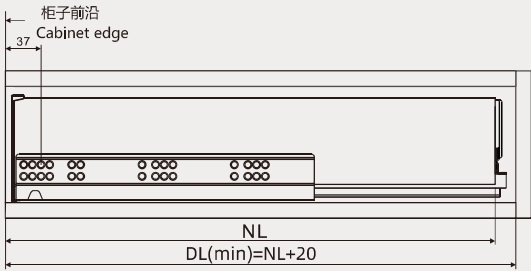滑轨安装尺寸 Slide installation dimension	抽屉所需空间 Drawer space requirement
柜子前沿 Cabinet front edge 	 DL: 柜体内部深度 Cabinet Internal Depth W: 柜体内部宽度 Cabinet Internal Width NL: 滑轨标示长度 Slide Nominal Length

精英82金属抽屉
Slim82
Metal Drawer



型号 Model: LB82BL

抽屉高Height: 90MM/低抽屉Low







- 长度规格: 270mm-550mm
- 动态负荷: 35kg @ 18"
- 特点: 全展出, 缓冲闭合, 低噪音滑行, 抽屉免工具快速安装/拆卸
- 面板调节: 三维(↑/↓/←/→/前/后)
- Length: 270mm-550mm
- Dyanamic Loading Capacity: 35kg @ 18"
- Feature: Full Extension, Soft Close, Silent ride, easy assemble/remove
- Front Pannel Adjustment: 3D(↑/↓/←/→/F/R)


颜色Color

编号Color Code	RAL色号RAL Code	色名Color Name
9007	RAL 9007	深灰 Dark Grey
9016	RAL9016	珍珠白 Pearl White
7042	RAL7042	浅灰 Light Grey

产品信息 Product Information

规格编号 Size-Part #		
长度 Length	高度Height	编号 Part #
270mm/11in	90mm	LB82BL-270
300mm/12in	90mm	LB82BL-300
350mm/14in	90mm	LB82BL-350
400mm/16in	90mm	LB82BL-400
450mm/18in	90mm	LB82BL-450
500mm/20in	90mm	LB82BL-500
550mm/22in	90mm	LB82BL-550




组件编号 Component Part #		
产品组件 Component Set	编号 Part #	
1 82骑马抽滑轨82 Drawerbox Slide		
	LB82AHG-270	LB82AHG-450
	LB82AHG-300	LB82AHG-500
	LB82AHG-350	LB82AHG-550
	LB82AHG-400	
2 金属侧帮Drawer Side Board		
	LB82BLCB-270	LB82BLCB-450
	LB82BLCB-300	LB82BLCB-500
	LB82BLCB-350	LB82BLCB-550
	LB82BLCB-400	
3 前接码Front Connector		
	TJ-250	
4 Logo盖板Cover Cap		
	SL-303	
5 后接码 Rear Connector		
	TJ-229	
6* 加高杆(长方型)* Galleries(Rect.)*		
	TJ-273	TJ-277
	TJ-274	TJ-278
	TJ-275	TJ-279
	TJ-276	


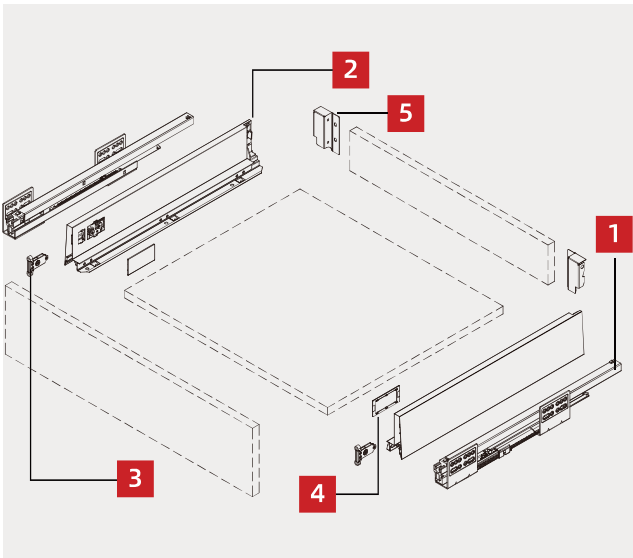




*选配配件 *Optional Part

型号 Model: LB82BL

安装尺寸 Installation dimension

柜体所需空间 Cabinet space requirement	前面板钻孔尺寸 Front panel drilling dimension	后背板钻孔尺寸 Rear panel drilling dimension
		

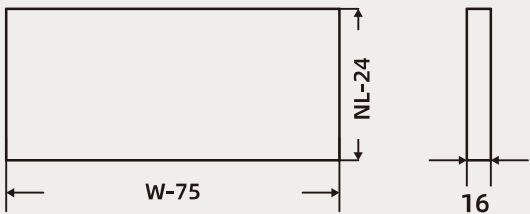底板开板尺寸 Bottom panel cutting dimension	后背板开板尺寸 Rear panel cutting dimension
	

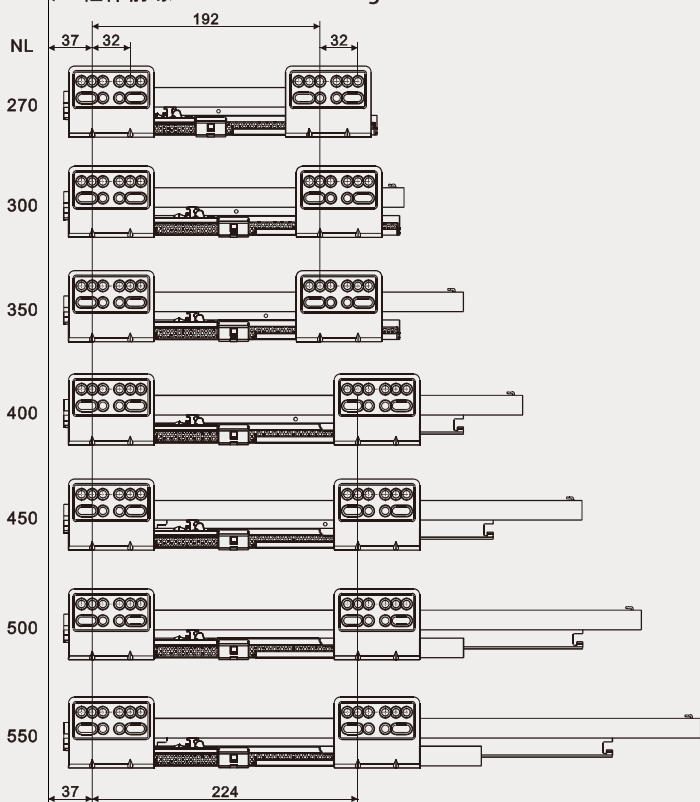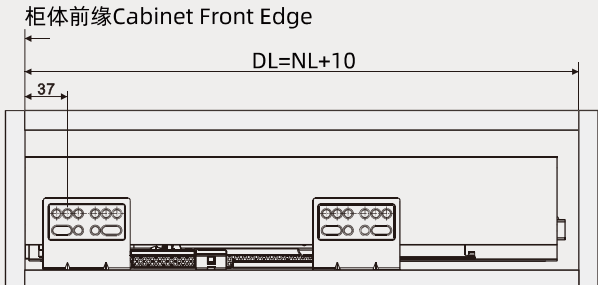滑轨安装尺寸 Slide installation dimension	抽屉所需空间 Drawer space requirement
柜体前缘Cabinet Front Edge 	柜体前缘Cabinet Front Edge  DL: 柜体内部深度 Cabinet Internal Depth W: 柜体内部宽度 Cabinet Internal Width NL: 滑轨标示长度 Slide Nominal Length

精英82金属抽屉
Slim82
Metal Drawer



型号 Model: LB82BM

抽屉高Height: 120MM/中抽屉Mid



- 长度规格: 270mm-550mm
- 动态负荷: 35kg @ 18"
- 特点: 全展出, 缓冲闭合, 低噪音滑行, 抽屉免工具快速安装/拆卸
- 面板调节: 三维(↑/↓/←/→/前/后)
- Length: 270mm-550mm
- Dyanamic Loading Capacity: 35kg @ 18"
- Feature: Full Extension, Soft Close, Silent ride, easy assemble/remove
- Front Pannel Adjustment: 3D(↑/↓/←/→/F/R)


颜色Color

编号Color Code	RAL色号RAL Code	色名Color Name
9007	RAL 9007	深灰 Dark Grey
9016	RAL9016	珍珠白 Pearl White
7042	RAL7042	浅灰 Light Grey

产品信息 Product Information

规格编号 Size-Part #		
长度 Length	高度Height	编号 Part #
270mm/11in	120mm	LB82BM-270
300mm/12in	120mm	LB82BM-300
350mm/14in	120mm	LB82BM-350
400mm/16in	120mm	LB82BM-400
450mm/18in	120mm	LB82BM-450
500mm/20in	120mm	LB82BM-500
550mm/22in	120mm	LB82BM-550


组件编号 Component Part #		
产品组件 Component Set	编号 Part #	
1 82骑马抽滑轨82 Drawerbox Slide		
	LB82AHG-270	LB82AHG-450
	LB82AHG-300	LB82AHG-500
	LB82AHG-350	LB82AHG-550
	LB82AHG-400	
2 金属侧帮Drawer Side Board		
	LB82BMCB-270	LB82BMCB-450
	LB82BMCB-300	LB82BMCB-500
	LB82BMCB-350	LB82BMCB-550
	LB82BMCB-400	
3 前接码Front Connector		
	TJ-250	
4 Logo盖板Cover Cap		
	SL-303	
5 后接码 Rear Connector		
	TJ-230	

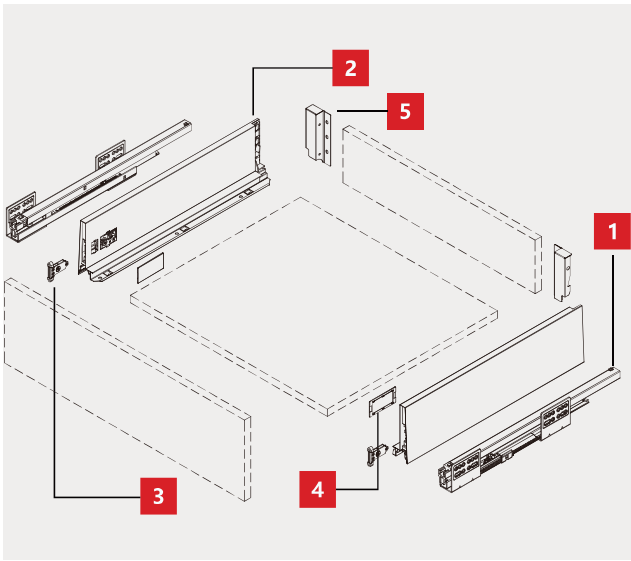


型号 Model: LB82BM

安装尺寸 Installation dimension

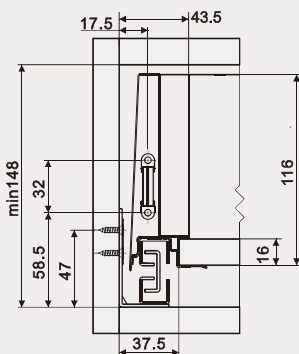
柜体所需空间
Cabinet space requirement




前面板钻孔尺寸
Front panel drilling dimension

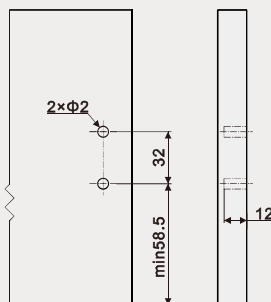


后背板钻孔尺寸
Rear panel drilling dimension

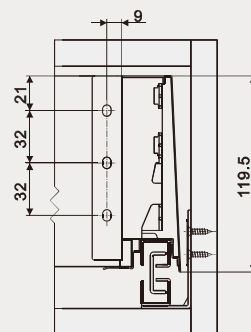


底板开板尺寸 Bottom panel cutting dimension

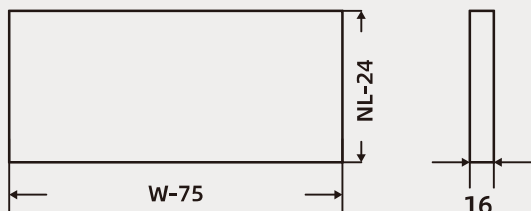


后背板开板尺寸 Rear panel cutting dimension

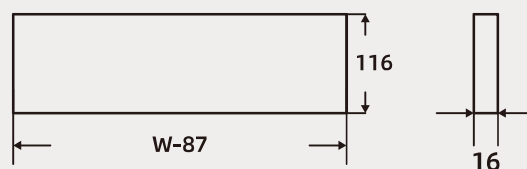

滑轨安装尺寸 Slide installation dimension

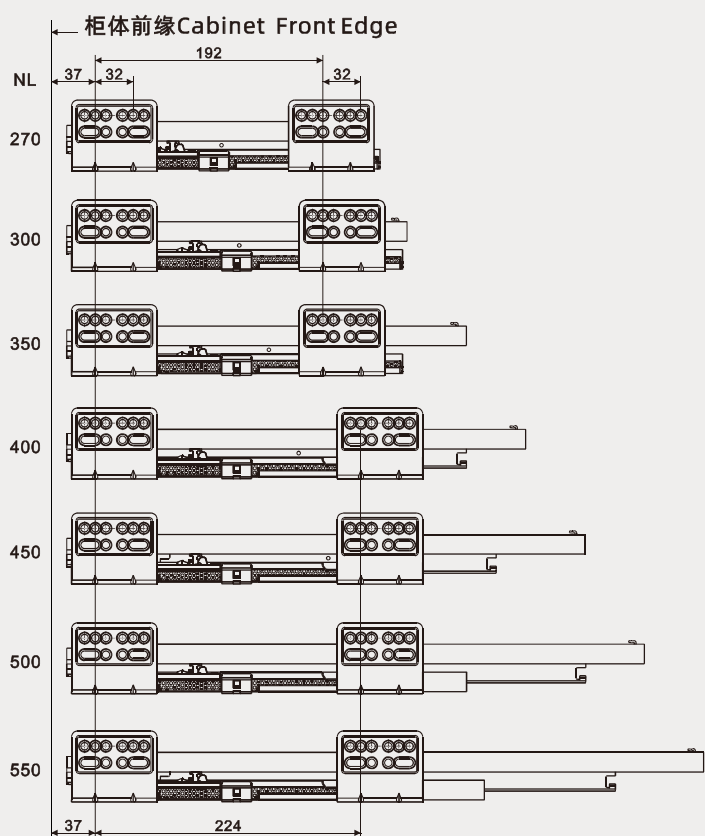

抽屉所需空间 Drawer space requirement

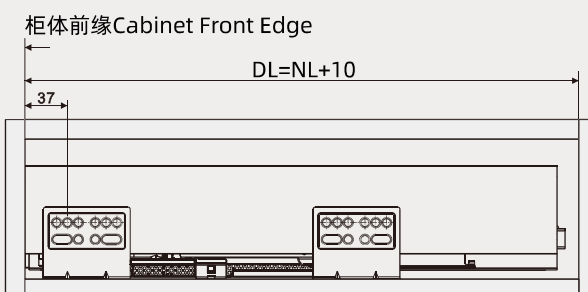

DL: 柜体内部深度 Cabinet Internal Depth

W: 柜体内部宽度 Cabinet Internal Width

NL: 滑轨标示长度 Slide Nominal Length

精英82金属抽屉
Slim82
Metal Drawer



型号 Model: LB82BH

抽屉高Height: 175MM/高抽屉High






- 长度规格: 270mm-550mm
- 动态负荷: 35kg @ 18"
- 特点: 全展出, 缓冲闭合, 低噪音滑行, 抽屉免工具快速安装/拆卸
- 面板调节: 三维(↑/↓/←/→/前/后)
- Length: 270mm-550mm
- Dyanamic Loading Capacity: 35kg @ 18"
- Feature: Full Extension, Soft Close, Silent ride, easy assemble/remove
- Front Pannel Adjustment: 3D(↑/↓/←/→/F/R)


颜色Color

编号Color Code	RAL色号RAL Code	色名Color Name
9007	RAL 9007	深灰 Dark Grey
9016	RAL9016	珍珠白 Pearl White
7042	RAL7042	浅灰 Light Grey

产品信息 Product Information




规格编号 Size-Part #		
长度 Length	高度 Height	编号 Part #
270mm/11in	120mm	LB82BH-270
300mm/12in	120mm	LB82BH-300
350mm/14in	120mm	LB82BH-350
400mm/16in	120mm	LB82BH-400
450mm/18in	120mm	LB82BH-450
500mm/20in	120mm	LB82BH-500
550mm/22in	120mm	LB82BH-550

组件编号 Component Part #		
产品组件 Component Set	编号 Part #	
1 82骑马抽滑轨82 Drawerbox Slide		
	LB82AHG-270	LB82AHG-450
	LB82AHG-300	LB82AHG-500
	LB82AHG-350	LB82AHG-550
	LB82AHG-400	
2 金属侧帮Drawer Side Board		
	LB82BHCB-270	LB82BHCB-450
	LB82BHCB-300	LB82BHCB-500
	LB82BHCB-350	LB82BHCB-550
	LB82BHCB-400	
3 前接码Front Connector		
	TJ-250	
4 Logo盖板Cover Cap		
	SL-303	
5 后接码Rear Connector		
	TJ-231	
6 上盖板Top Cover Cap		
	SL-320	

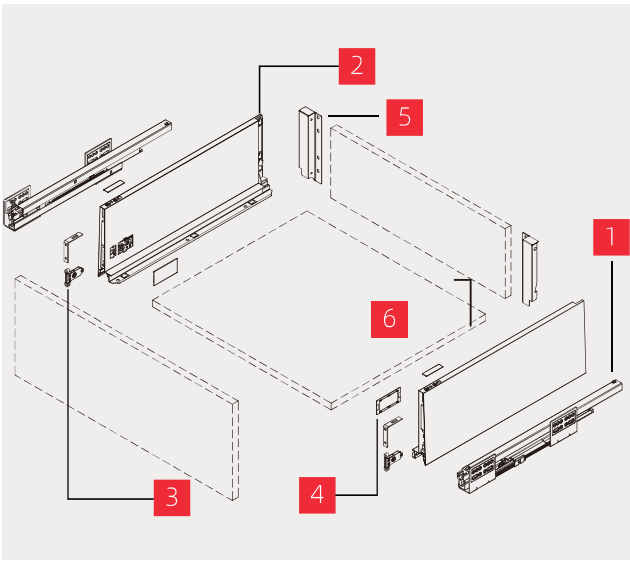

型号 Model: LB82BH

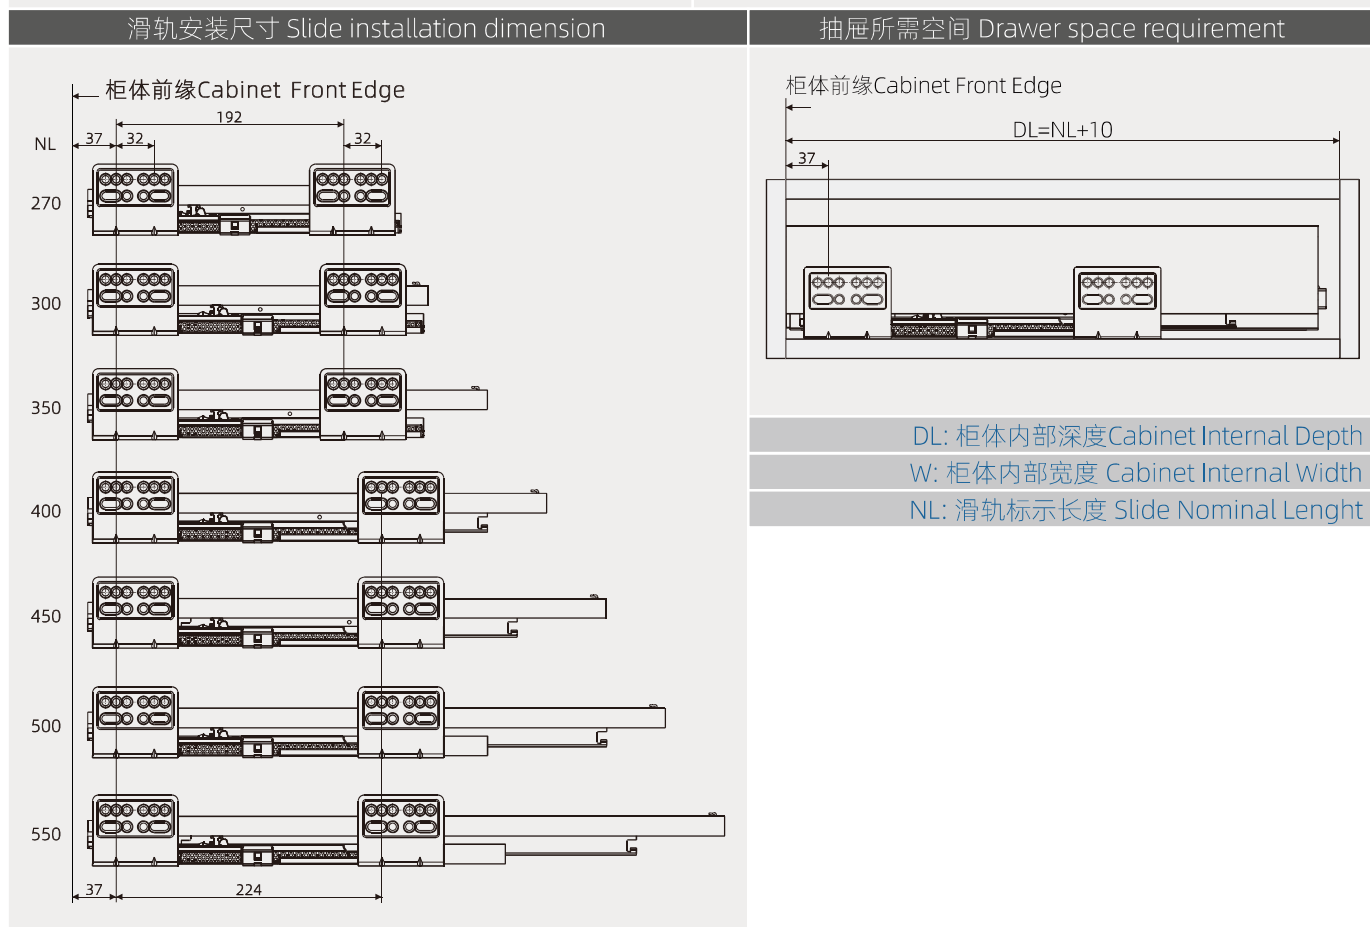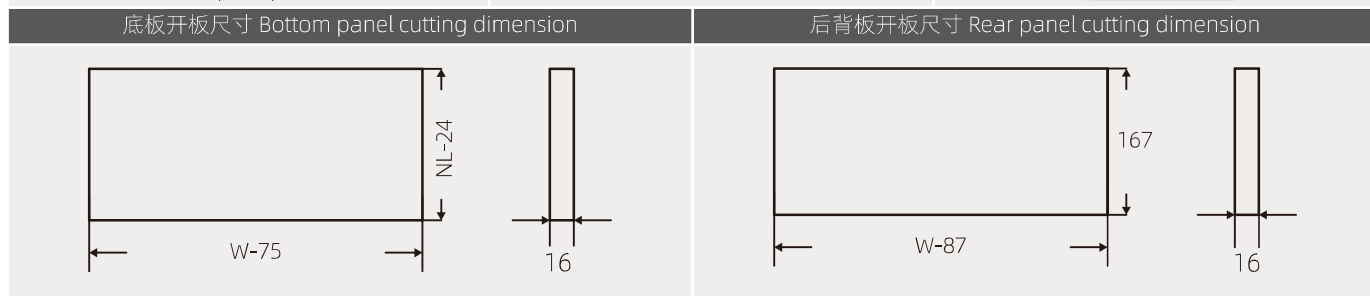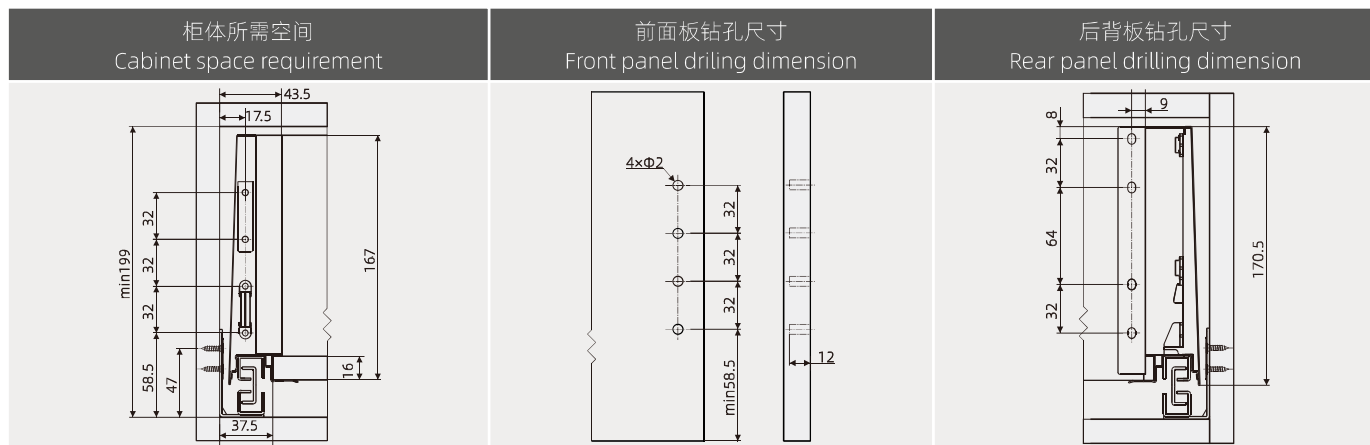安装尺寸 Installation dimension



DL: 柜体内部深度 Cabinet Internal Depth

W: 柜体内部宽度 Cabinet Internal Width

NL: 滑轨标示长度 Slide Nominal Length

经典82金属抽屉
Classic82
Metal Drawer



型号 Model: LB82AL

抽屉高Height: 75MM/低抽屉Low



- 长度规格: 270mm-550mm
- 动态负荷: 35kg @ 18"
- 特点: 全展出, 缓冲闭合, 低噪音滑行, 抽屉免工具快速安装/拆卸
- 面板调节: 三维(↑/↓/←/→/前/后)
- Length: 270mm-550mm
- Dyanamic Loading Capacity: 35kg @ 18"
- Feature: Full Extension, Soft Close, Silent ride, easy assemble/remove
- Front Pannel Adjustment: 3D(↑/↓/←/→/F/R)


颜色Color

编号Color Code	RAL色号RAL Code	色名Color Name
9007	RAL 9007	深灰 Dark Grey
9016	RAL9016	珍珠白 Pearl White
7042	RAL7042	浅灰 Light Grey

产品信息 Product Information







规格编号 Size-Part #		
长度 Length	高度 Height	编号 Part #
270mm/11in	75mm	LB82AL-270
300mm/12in	75mm	LB82AL-300
350mm/14in	75mm	LB82AL-350
400mm/16in	75mm	LB82AL-400
450mm/18in	75mm	LB82AL-450
500mm/20in	75mm	LB82AL-500
550mm/22in	75mm	LB82AL-550

组件编号 Component Part #		
产品组件 Component Set	编号 Part #	
1 82骑马抽滑轨82 Drawerbox Slide		
	LB82AHG-270	LB82AHG-450
	LB82AHG-300	LB82AHG-500
	LB82AHG-350	LB82AHG-550
	LB82AHG-400	
2 金属侧帮Drawer Side Board		
	LB82ACB-270	LB82ACB-450
	LB82ACB-300	LB82ACB-500
	LB82ACB-350	LB82ACB-550
	LB82ACB-400	
3 前接码Front Connector		
	TJ-250	
4 Logo盖板Cover Cap		
	SL-303	
5 后接码Rear Connector		
	TJ-189	

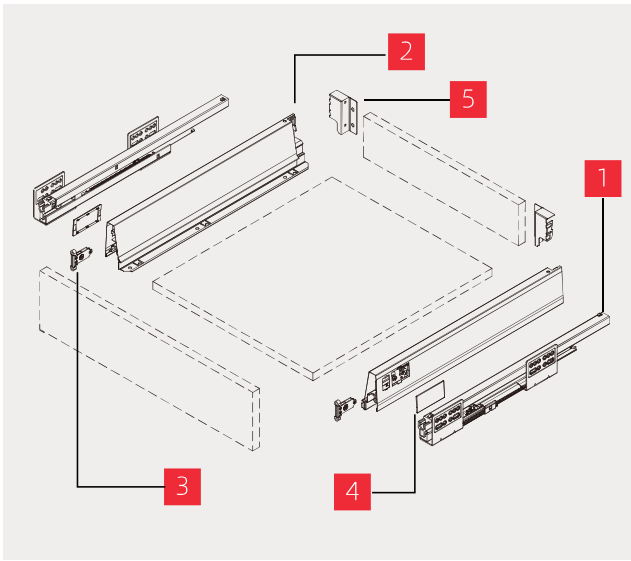

型号 Model: LB82AL

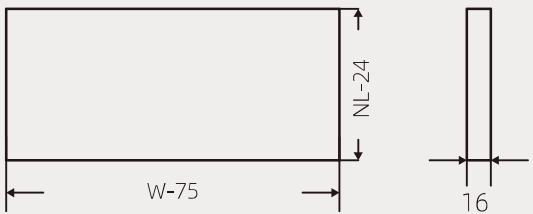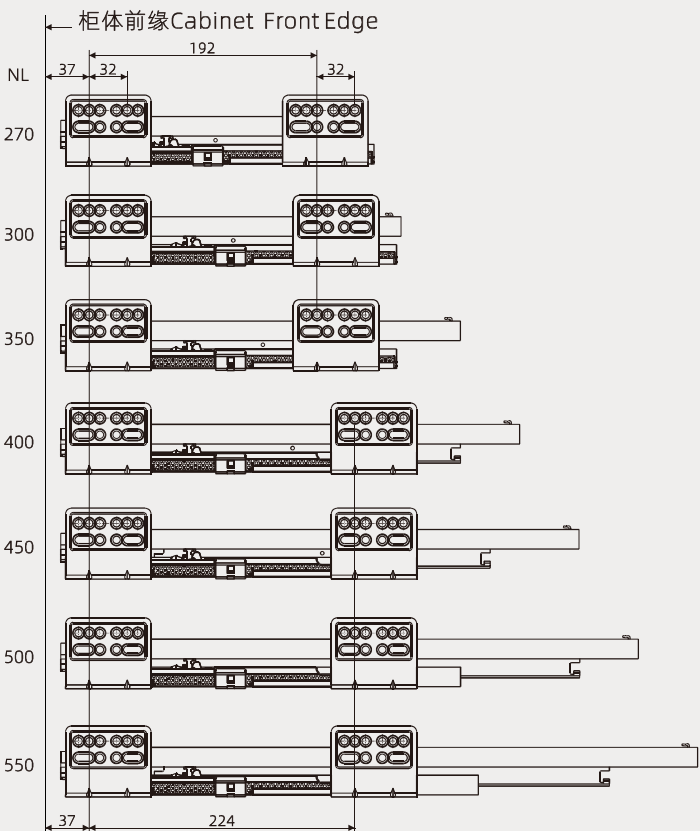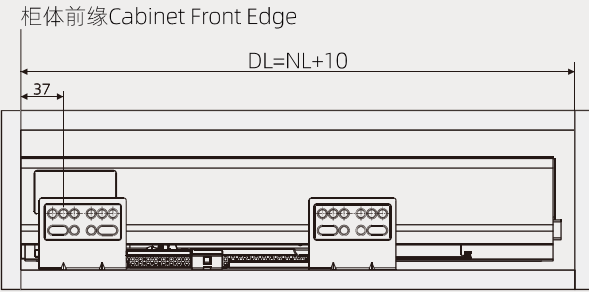安装尺寸 Installation dimension


柜体所需空间 Cabinet space requirement	前面板钻孔尺寸 Front panel drilling dimension	后背板钻孔尺寸 Rear panel drilling dimension
		
底板开板尺寸 Bottom panel cutting dimension	后背板开板尺寸 Rear panel cutting dimension	
		
滑轨安装尺寸 Slide installation dimension		抽屉所需空间 Drawer space requirement
		 DL: 柜体内部深度 Cabinet Internal Depth W: 柜体内部宽度 Cabinet Internal Width NL: 滑轨标示长度 Slide Nominal Length

经典82金属抽屉
Classic82
Metal Drawer



型号 Model: LB82AM

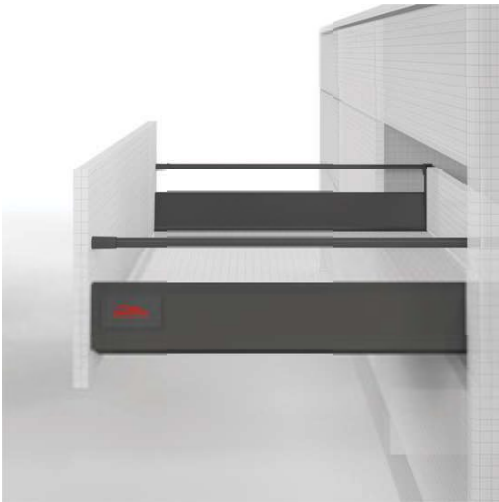抽屉高Height: 125MM/中抽屉Mid




- 长度规格: 270mm-550mm
- 动态负荷: 35kg @ 18"
- 特点: 全展出, 缓冲闭合, 低噪音滑行, 抽屉免工具快速安装/拆卸
- 面板调节: 三维(↑/↓/←/→/前/后)
- Length: 270mm-550mm
- Dyanamic Loading Capacity: 35kg @ 18"
- Feature: Full Extension, Soft Close, Silent ride, easy assemble/remove
- Front Pannel Adjustment: 3D(↑/↓/←/→/F/R)





颜色Color

编号Color Code	RAL色号RAL Code	色名Color Name
9007	RAL 9007	深灰 Dark Grey
9016	RAL9016	珍珠白 Pearl White
7042	RAL7042	浅灰 Light Grey

产品信息 Product Information

规格编号 Size-Part #		
长度 Length	高度 Height	编号 Part #
270mm/11in	125mm	LB82AM-270
300mm/12in	125mm	LB82AM-300
350mm/14in	125mm	LB82AM-350
400mm/16in	125mm	LB82AM-400
450mm/18in	125mm	LB82AM-450
500mm/20in	125mm	LB82AM-500
550mm/22in	125mm	LB82AM-550



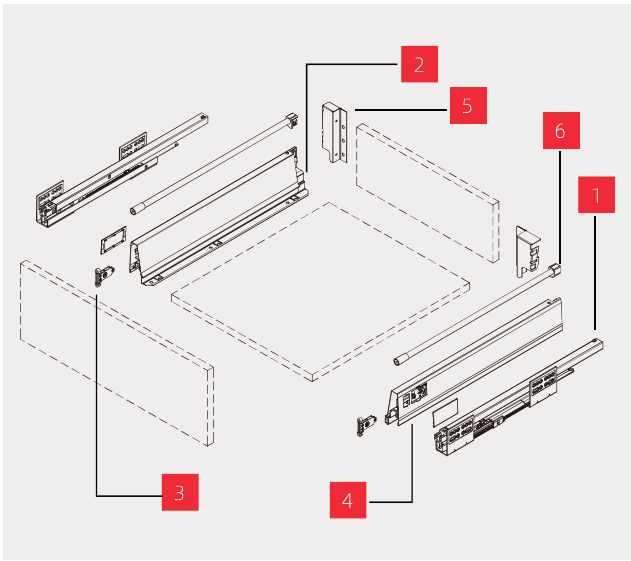




组件编号 Component Part #			
产品组件 Component Set		编号 Part #	
1	82骑马抽滑轨82 Drawerbox Slide		
		LB82AHG-270	LB82AHG-450
		LB82AHG-300	LB82AHG-500
		LB82AHG-350	LB82AHG-550
		LB82AHG-400	
2	金属侧帮Drawer Side Board		
		LB82ACB-270	LB82ACB-450
		LB82ACB-300	LB82ACB-500
		LB82ACB-350	LB82ACB-550
		LB82ACB-400	
3	前接码Front Connector		
		TJ-250	
4	Logo盖板Cover Cap		
		SL-303	
5	后接码 Rear Connector		
		TJ-190	
6	加高杆(圆管*/方管*/长方管*) Galleries(Round/Square*/Rect.*)		
 圆管 Round	TJ-200-270-2	TJ-164-400-2	TJ-167-550-2
	TJ-201-300-2	TJ-165-450-2	
	TJ-163-350-2	TJ-166-500-2	
 方管* Squ.*	TJ-202-270-2	TJ-171-400-2	TJ-174-550-2
	TJ-203-300-2	TJ-172-450-2	
	TJ-170-350-2	TJ-173-500-2	
 长方* Rect.*	TJ-273	TJ-276	TJ-279
	TJ-274	TJ-277	
	TJ-275	TJ-278	



*选配配件 *Optional Part

型号 Model: LB82AM

安装尺寸 Installation dimension

柜体所需空间 Cabinet space requirement	前面板钻孔尺寸 Front panel drilling dimension	后背板钻孔尺寸 Rear panel drilling dimension
		

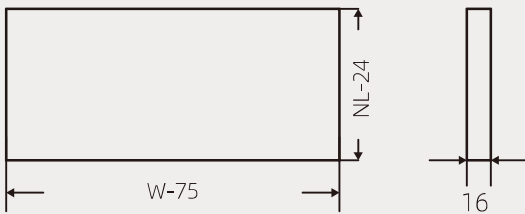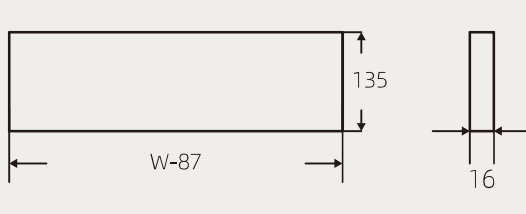底板开板尺寸 Bottom panel cutting dimension	后背板开板尺寸 Rear panel cutting dimension
	

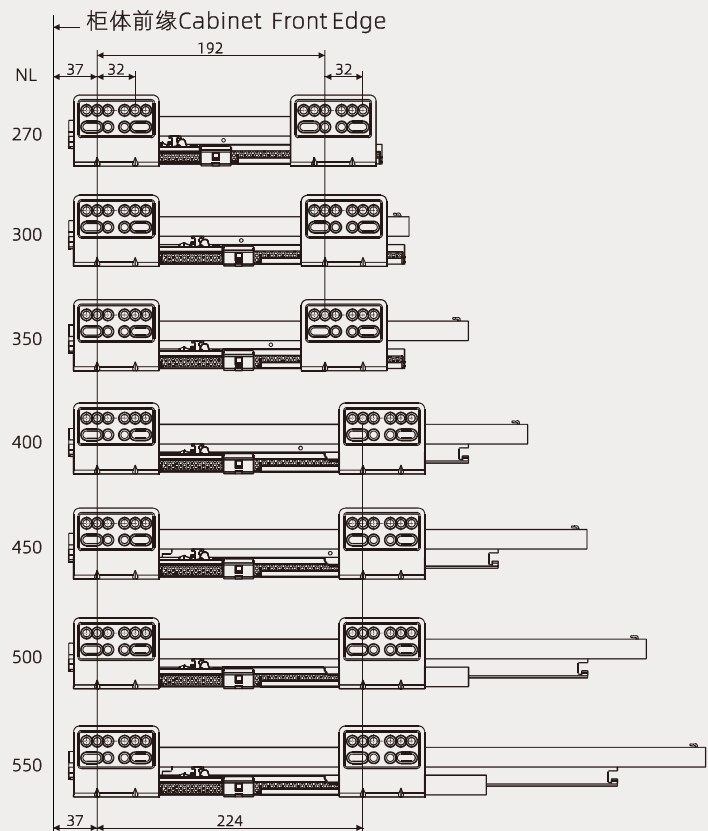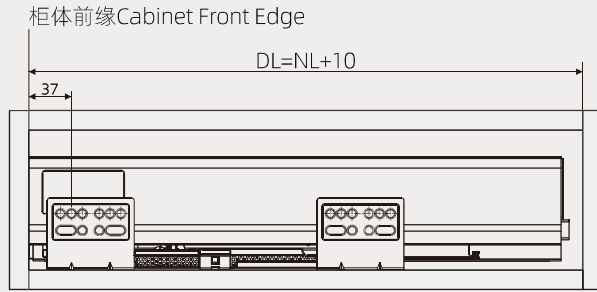
滑轨安装尺寸 Slide installation dimension	抽屉所需空间 Drawer space requirement
柜体前缘 Cabinet Front Edge 	柜体前缘 Cabinet Front Edge  DL: 柜体内部深度 Cabinet Internal Depth W: 柜体内部宽度 Cabinet Internal Width NL: 滑轨标示长度 Slide Nominal Length

经典82金属抽屉
Classic82
Metal Drawer



型号 Model: LB82AH

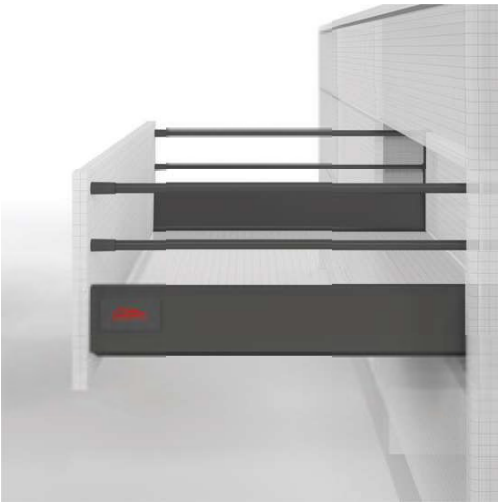抽屉高Height: 185MM/高抽屉High




- 长度规格: 270mm-550mm
- 动态负荷: 35kg @ 18"
- 特点: 全展出, 缓冲闭合, 低噪音滑行, 抽屉免工具快速安装/拆卸
- 面板调节: 三维(↑/↓/←/→/前/后)
- Length: 270mm-550mm
- Dyanamic Loading Capacity: 35kg @ 18"
- Feature: Full Extension, Soft Close, Silent ride, easy assemble/remove
- Front Pannel Adjustment: 3D(↑/↓/←/→/F/R)





颜色Color

编号Color Code	RAL色号RAL Code	色名Color Name
9007	RAL 9007	深灰 Dark Grey
9016	RAL9016	珍珠白 Pearl White
7042	RAL7042	浅灰 Light Grey

产品信息 Product Information

规格编号 Size-Part #		
长度 Length	高度Height	编号 Part #
270mm/11in	185mm	LB82AH-270
300mm/12in	185mm	LB82AH-300
350mm/14in	185mm	LB82AH-350
400mm/16in	185mm	LB82AH-400
450mm/18in	185mm	LB82AH-450
500mm/20in	185mm	LB82AH-500
550mm/22in	185mm	LB82AH-550







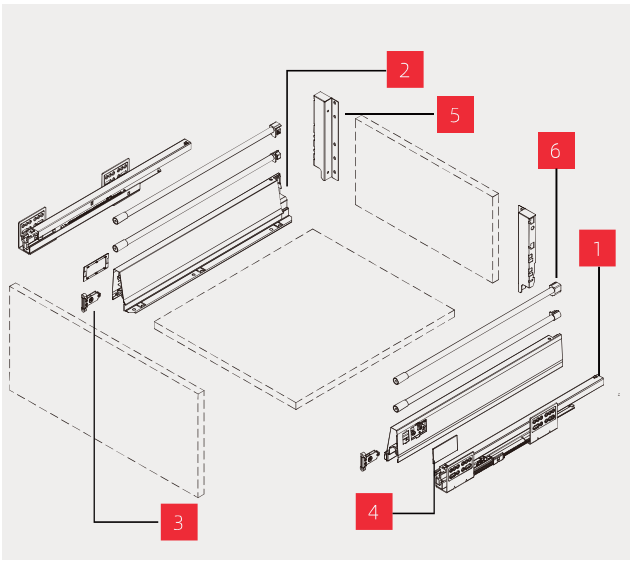


组件编号 Component Part #			
产品组件 Component Set		编号 Part #	
1	82骑马抽滑轨82 Drawerbox Slide		
		LB82AHG-270	LB82AHG-450
		LB82AHG-300	LB82AHG-500
		LB82AHG-350	LB82AHG-550
		LB82AHG-400	
2	金属侧帮Drawer Side Board		
		LB82ACB-270	LB82ACB-450
		LB82ACB-300	LB82ACB-500
		LB82ACB-350	LB82ACB-550
		LB82ACB-400	
3	前接码Front Connector		
		TJ-250	
4	Logo盖板Cover Cap		
		SL-303	
5	后接码 Rear Connector		
		TJ-191	
6	加高杆(圆管*/方管*/长方管*) Galleries(Round/Square*/Rect.*)		
 圆管 Round	TJ-200-270-4	TJ-164-400-4	TJ-167-550-4
	TJ-201-300-4	TJ-165-450-4	
	TJ-163-350-4	TJ-166-500-4	
 方管* Squ.*	TJ-202-270-4	TJ-171-400-4	TJ-174-550-4
	TJ-203-300-4	TJ-172-450-4	
	TJ-170-350-4	TJ-173-500-4	
 长方* Rect.*	TJ-273	TJ-276	TJ-279
	TJ-274	TJ-277	
	TJ-275	TJ-278	

*选配配件 *Optional Part

型号 Model: LB82AH

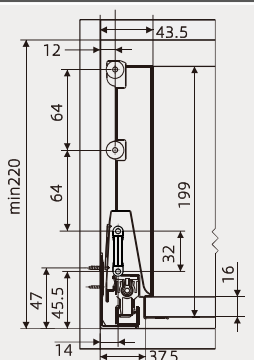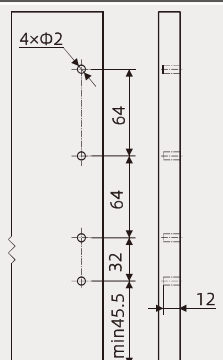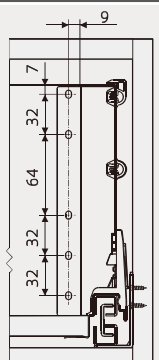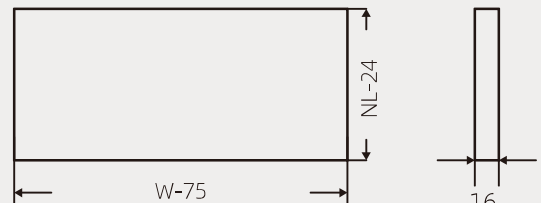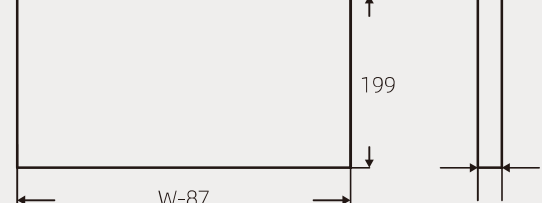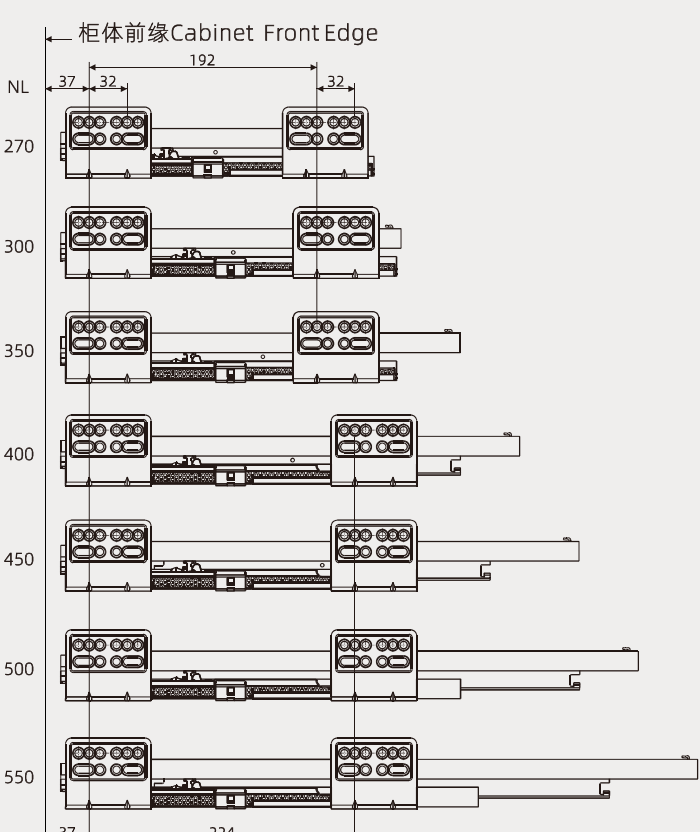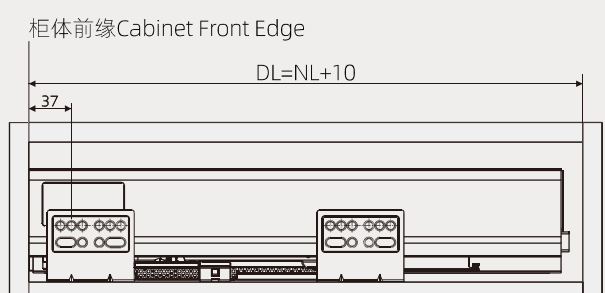安装尺寸 Installation dimension

柜体所需空间 Cabinet space requirement	前面板钻孔尺寸 Front panel drilling dimension	后背板钻孔尺寸 Rear panel drilling dimension
		
底板开板尺寸 Bottom panel cutting dimension	后背板开板尺寸 Rear panel cutting dimension	
		
滑轨安装尺寸 Slide installation dimension	抽屉所需空间 Drawer space requirement	
 柜体前缘 Cabinet Front Edge	 柜体前缘 Cabinet Front Edge	
	DL: 柜体内部深度 Cabinet Internal Depth	
	W: 柜体内部宽度 Cabinet Internal Width	
	NL: 滑轨标示长度 Slide Nominal Length	

经典81金属抽屉
Classic81
Metal Drawer



型号 Model: LB81L

抽屉高Height: 76MM/低抽屉Low



- 长度规格: 270mm-550mm
- 动态负荷: 35kg @ 18"
- 特点: 全展出, 缓冲闭合, 低噪音滑行, 抽屉免工具快速安装/拆卸
- 面板调节: 三维(↑/↓/←/→/前/后)
- Length: 270mm-550mm
- Dyanamic Loading Capacity: 35kg @ 18"
- Feature: Full Extension, Soft Close, Silent ride, easy assemble/remove
- Front Pannel Adjustment: 3D(↑/↓/←/→/F/R)


颜色Color

编号Color Code	RAL色号RAL Code	色名Color Name
9007	RAL 9007	深灰 Dark Grey
9016	RAL9016	珍珠白 Pearl White
7042	RAL7042	浅灰 Light Grey

产品信息 Product Information




规格编号 Size-Part #		
长度 Length	高度Height	编号 Part #
270mm/11in	76mm	LB81L-270
300mm/12in	76mm	LB81L-300
350mm/14in	76mm	LB81L-350
400mm/16in	76mm	LB81L-400
450mm/18in	76mm	LB81L-450
500mm/20in	76mm	LB81L-500
550mm/22in	76mm	LB81L-550


组件编号 Component Part #		
产品组件 Component Set	编号 Part #	
1 81骑马抽滑轨81 Drawerbox Slide		
	LB81HG-270	LB81HG-450
	LB81HG-300	LB81HG-500
	LB81HG-350	LB81HG-550
	LB81HG-400	
2 金属侧帮Drawer Side Board		
	LB81CB-270	LB81CB-450
	LB81CB-300	LB81CB-500
	LB81CB-350	LB81CB-550
	LB81CB-400	
3 前接码Front Connector		
	TJ-150	
4 Logo盖板Cover Cap		
	SL-201	
5 后接码 Rear Connector		
	TJ-125	


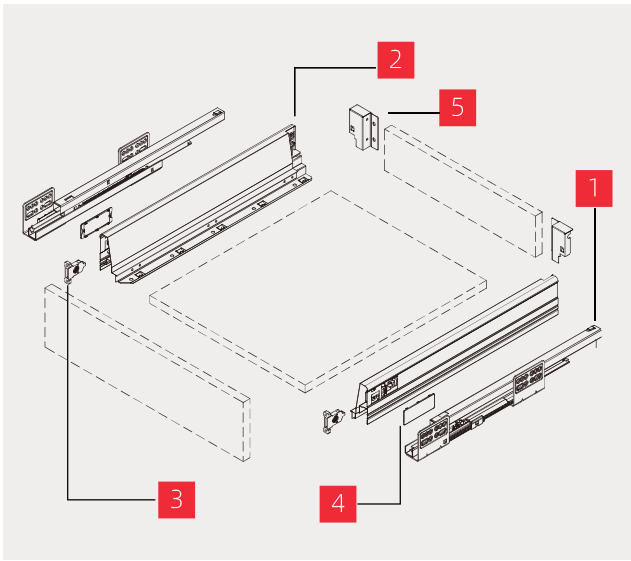


型号 Model: LB81L

安装尺寸 Installation dimension

柜体所需空间 Cabinet space requirement	前面板钻孔尺寸 Front panel drilling dimension	后背板钻孔尺寸 Rear panel drilling dimension
		

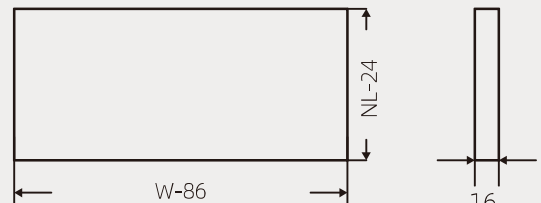底板开板尺寸 Bottom panel cutting dimension	后背板开板尺寸 Rear panel cutting dimension
	

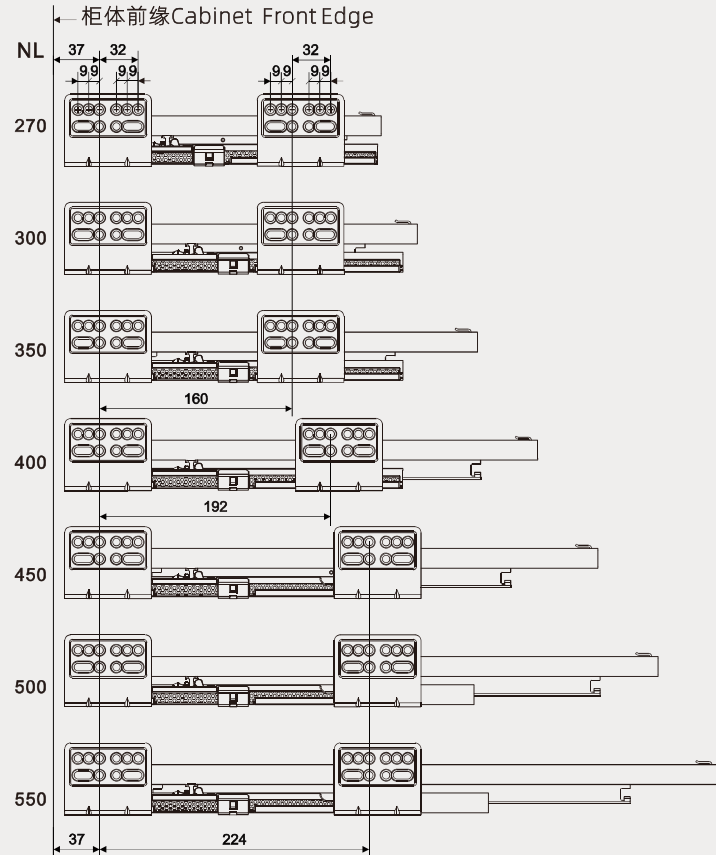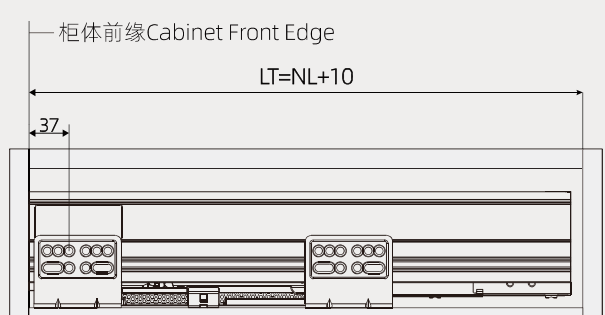
滑轨安装尺寸 Slide installation dimension	抽屉所需空间 Drawer space requirement
柜体前缘 Cabinet Front Edge 	柜体前缘 Cabinet Front Edge  DL: 柜体内部深度 Cabinet Internal Depth W: 柜体内部宽度 Cabinet Internal Width NL: 滑轨标示长度 Slide Nominal Length

经典81金属抽屉
Classic81
Metal Drawer



型号 Model: LB81M

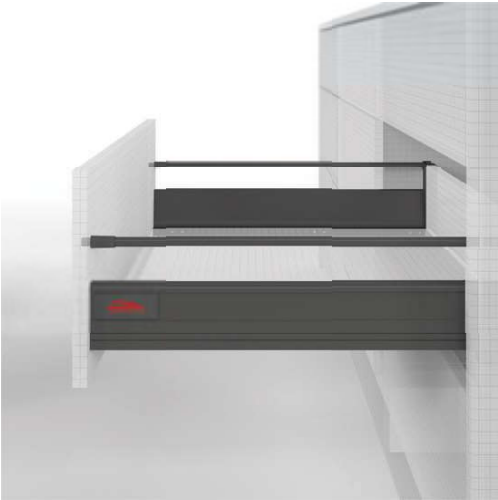抽屉高Height: 125MM/中抽屉Mid




- 长度规格: 270mm-550mm
- 动态负荷: 35kg @ 18"
- 特点: 全展出, 缓冲闭合, 低噪音滑行, 抽屉免工具快速安装/拆卸
- 面板调节: 三维(↑/↓/←/→/前/后)
- Length: 270mm-550mm
- Dyanamic Loading Capacity: 35kg @ 18"
- Feature: Full Extension, Soft Close, Silent ride, easy assemble/remove
- Front Pannel Adjustment: 3D(↑/↓/←/→/F/R)

颜色Color

编号Color Code	RAL色号RAL Code	色名Color Name
9007	RAL 9007	深灰 Dark Grey
9016	RAL9016	珍珠白 Pearl White
7042	RAL7042	浅灰 Light Grey

产品信息 Product Information

规格编号 Size-Part #		
长度 Length	高度 Height	编号 Part #
270mm/11in	125mm	LB81M-270
300mm/12in	125mm	LB81M-300
350mm/14in	125mm	LB81M-350
400mm/16in	125mm	LB81M-400
450mm/18in	125mm	LB81M-450
500mm/20in	125mm	LB81M-500
550mm/22in	125mm	LB81M-550







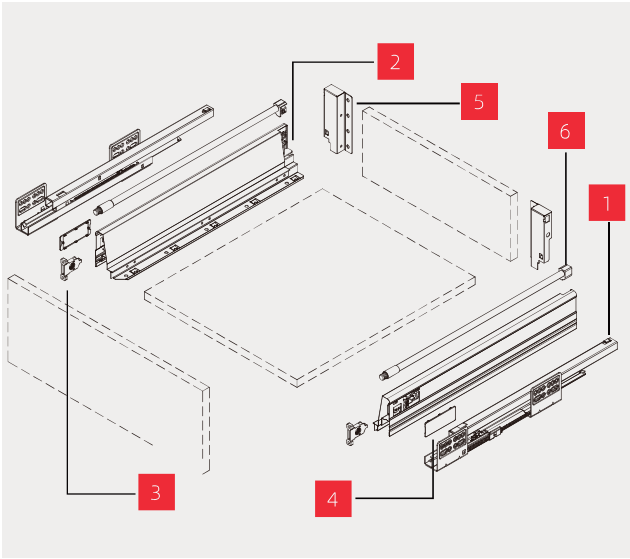


组件编号 Component Part #			
产品组件 Component Set		编号 Part #	
1	81 骑马抽滑轨81 Drawerbox Slide	LB81HG-270	LB81HG-450
		LB81HG-300	LB81HG-500
		LB81HG-350	LB81HG-550
		LB81HG-400	
2	金属侧帮Drawer Side Board	LB81CB-270	LB81CB-450
		LB81CB-300	LB81CB-500
		LB81CB-350	LB81CB-550
		LB81CB-400	
3	前接码Front Connector	TJ-250	
4	Logo盖板Cover Cap	SL-303	
5	后接码 Rear Connector	TJ-135	
6	加高杆(圆管/方管*) Galleries(Round/Square*)	TJ-200-270-2	TJ-164-400-2 TJ-167-550-2
		圆管 Round	TJ-201-300-2 TJ-165-450-2
			TJ-163-350-2 TJ-166-500-2
		方管* Squ.*	TJ-202-270-2 TJ-171-400-2 TJ-174-550-2
			TJ-203-300-2 TJ-172-450-2
			TJ-170-350-2 TJ-173-500-2

*选配配件 *Optional Part

型号 Model: LB81M

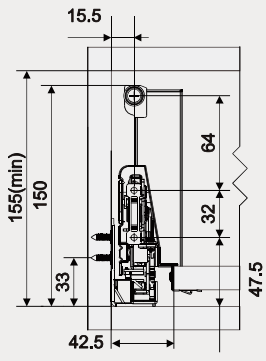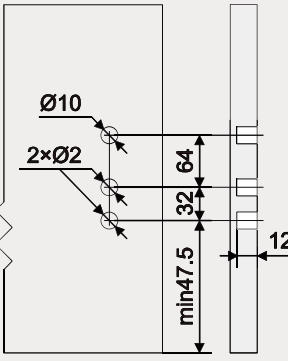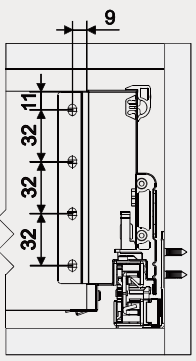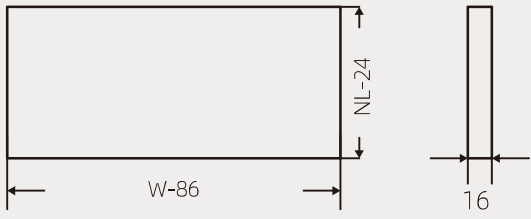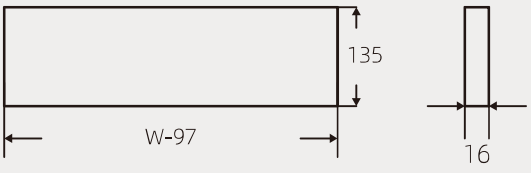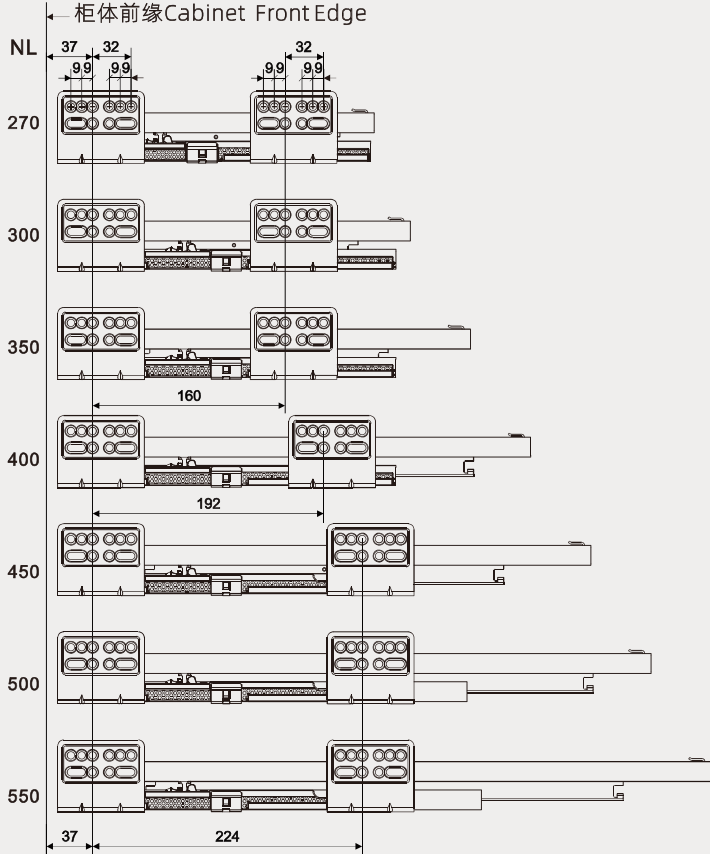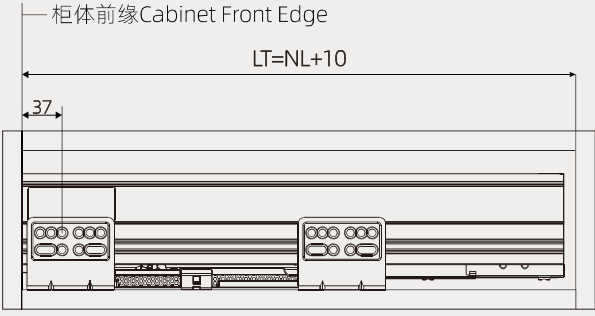安装尺寸 Installation dimension


柜体所需空间 Cabinet space requirement	前面板钻孔尺寸 Front panel drilling dimension	后背板钻孔尺寸 Rear panel drilling dimension
		
底板开板尺寸 Bottom panel cutting dimension	后背板开板尺寸 Rear panel cutting dimension	
		
滑轨安装尺寸 Slide installation dimension		抽屉所需空间 Drawer space requirement
		 DL: 柜体内部深度 Cabinet Internal Depth W: 柜体内部宽度 Cabinet Internal Width NL: 滑轨标示长度 Slide Nominal Length

经典81金属抽屉
Classic81
Metal Drawer



型号 Model: LB81H

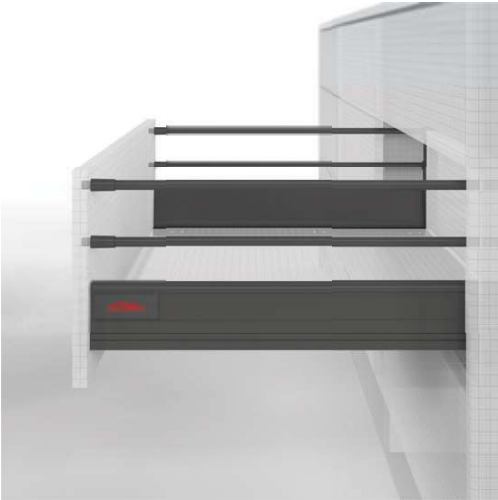抽屉高Height: 186MM/高抽屉High




- 长度规格: 270mm-550mm
- 动态负荷: 35kg @ 18"
- 特点: 全展出, 缓冲闭合, 低噪音滑行, 抽屉免工具快速安装/拆卸
- 面板调节: 三维(↑/↓/←/→/前/后)
- Length: 270mm-550mm
- Dyanamic Loading Capacity: 35kg @ 18"
- Feature: Full Extension, Soft Close, Silent ride, easy assemble/remove
- Front Pannel Adjustment: 3D(↑/↓/←/→/F/R)

颜色Color

编号Color Code	RAL色号RAL Code	色名Color Name
9007	RAL 9007	深灰 Dark Grey
9016	RAL9016	珍珠白 Pearl White
7042	RAL7042	浅灰 Light Grey

产品信息 Product Information

规格编号 Size-Part #		
长度 Length	高度Height	编号 Part #
270mm/11in	186mm	LB81H-270
300mm/12in	186mm	LB81H-300
350mm/14in	186mm	LB81H-350
400mm/16in	186mm	LB81H-400
450mm/18in	186mm	LB81H-450
500mm/20in	186mm	LB81H-500
550mm/22in	186mm	LB81H-550







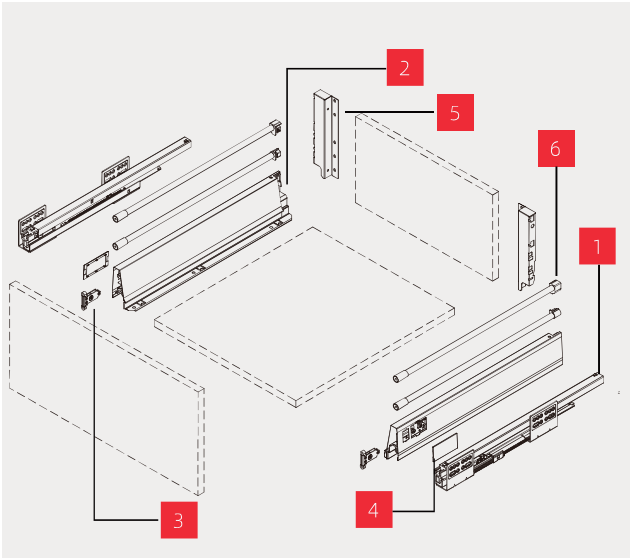


组件编号 Component Part #			
产品组件 Component Set		编号 Part #	
1	81 骑马抽滑轨81 Drawerbox Slide	LB81HG-270	LB81HG-450
		LB81HG-300	LB81HG-500
		LB81HG-350	LB81HG-550
		LB81HG-400	
2	金属侧帮Drawer Side Board	LB81CB-270	LB81CB-450
		LB81CB-300	LB81CB-500
		LB81CB-350	LB81CB-550
		LB81CB-400	
3	前接码Front Connector		TJ-150
4	Logo盖板Cover Cap		SL- 201
5	后接码 Rear Connector		TJ-137
6	加高杆(圆管/方管*) Galleries(Round/Square*)	TJ-200-270-4	TJ-164-400-4
		TJ-201-300-4	TJ-165-450-4
		TJ-163-350-4	TJ-166-500-4
		TJ-202-270-4	TJ-171-400-4
		TJ-203-300-4	TJ-172-450-4
		TJ-170-350-4	TJ-173-500-4

*选配配件 *Optional Part

型号 Model: LB81H

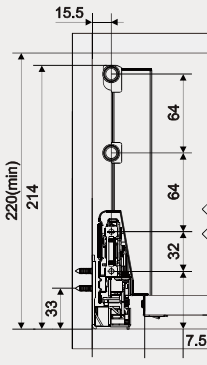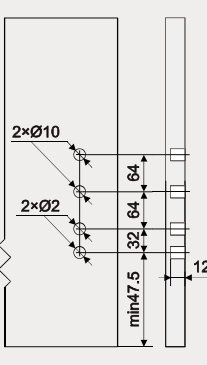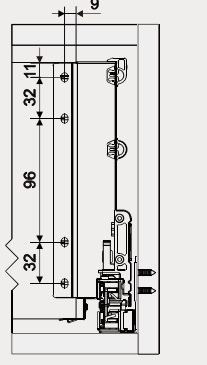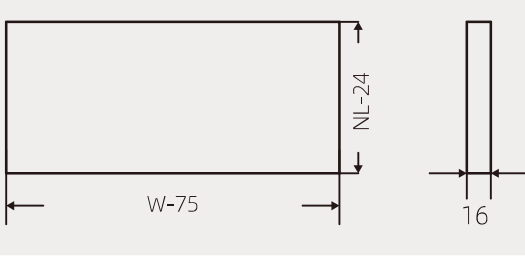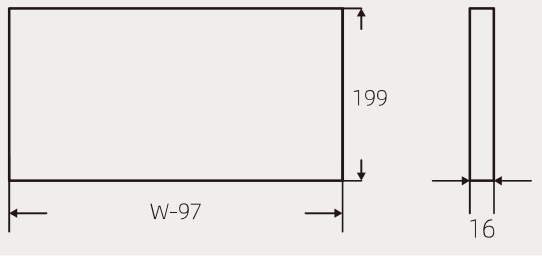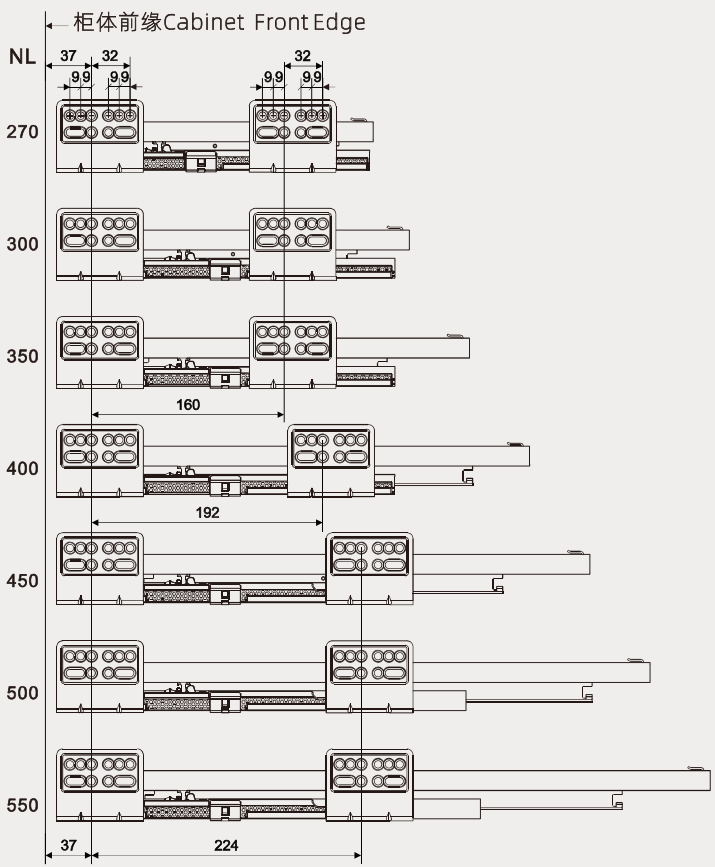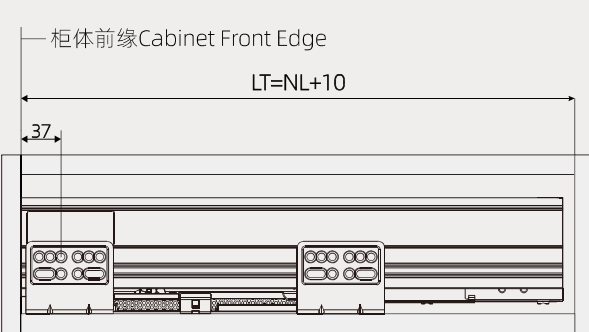安装尺寸 Installation dimension


柜体所需空间 Cabinet space requirement	前面板钻孔尺寸 Front panel drilling dimension	后背板钻孔尺寸 Rear panel drilling dimension
		
底板开板尺寸 Bottom panel cutting dimension	后背板开板尺寸 Rear panel cutting dimension	
		
滑轨安装尺寸 Slide installation dimension		抽屉所需空间 Drawer space requirement
		 DL: 柜体内部深度 Cabinet Internal Depth W: 柜体内部宽度 Cabinet Internal Width NL: 滑轨标示长度 Slide Nominal Length

HONGLI 鸿丽



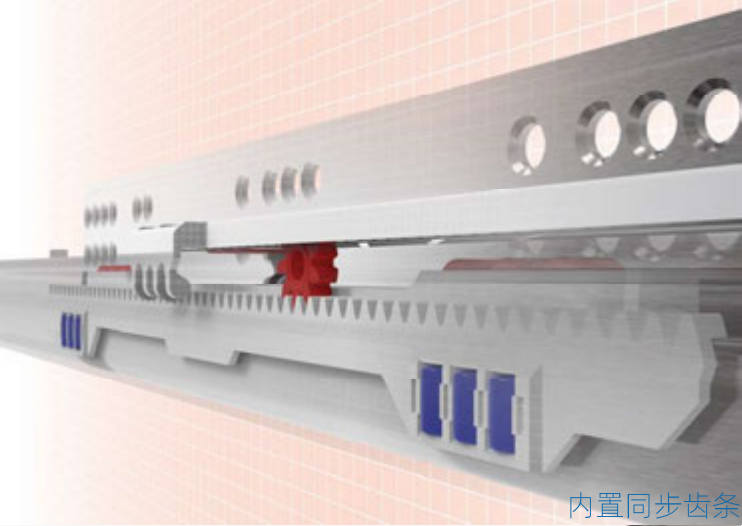AGETRAIN 时代列车






隐藏轨系列
Undermount
Slide

反弹+缓冲·全拉出隐藏轨
Push-Open with Soft Close
Full Extension Undermount slide



型号 Model: FH4801/FH5001(16mm/19mm)

调节把手 | Locking Bracket

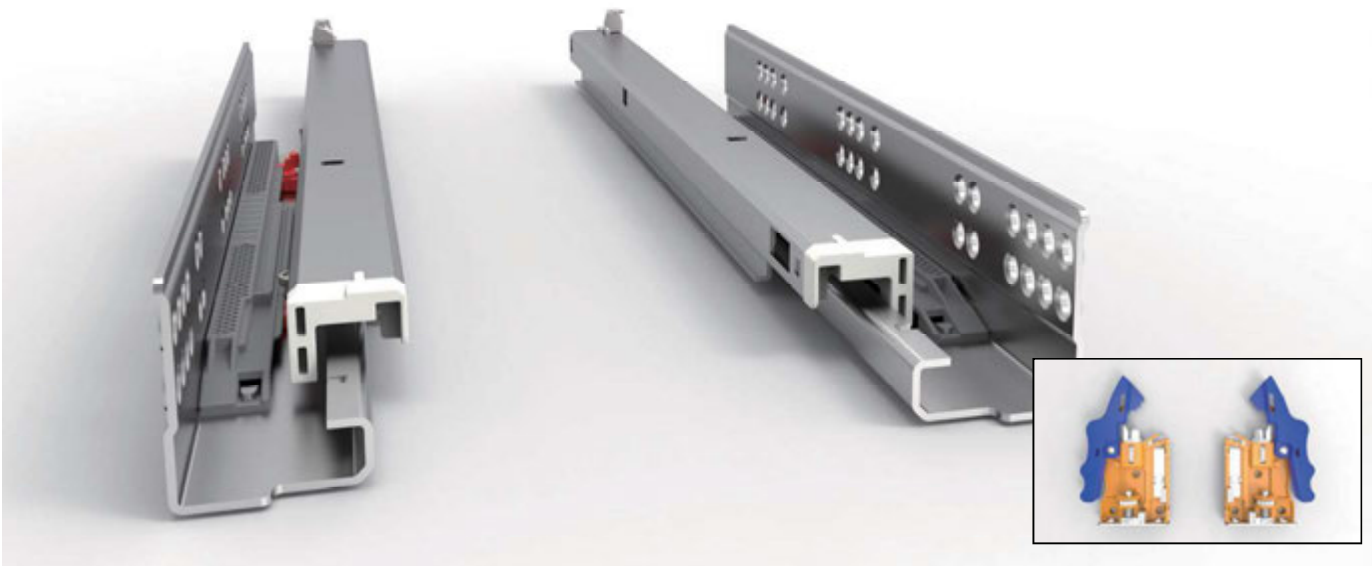

- 可生产长度：250mm-550mm
- 承载重量：34kg/18"
- 使用寿命：50000次（正常承重下）
- 特点：滑轨为全展出，滑轨运动顺滑无噪音，抽屉的高度可调节0-3mm
- Product length:250-550mm(10"-22")
- Loadingweight:34kg/18"
- life span:50000 times
- Feature:Full extension,quietly operation,tool-less height adj. (0-3mm)



产品信息 Product Information

套装包装 Completed Packaging


1 全拉出隐藏轨Undermount Slide	长度 Length		编号 Part Num#	
	250mm/10in		FH4801-250	FH5001-250
	300mm/12in		FH4801-300	FH5001-300
	350mm/14in		FH4801-350	FH5001-350
	400mm/16in		FH4801-400	FH5001-400
	450mm/18in		FH4801-450	FH5001-450
	500mm/20in		FH4801-500	FH5001-500
	550mm/22in		FH4801-550	FH5001-550
包装Pack: 10 付/箱(Sets/CTN)		侧板厚度Drawer Side Thickness	Max. 16mm	Max. 19mm

标准配件 Standard Accessories Part

2 2D快拆把手 2D Locking Bracket	产品编号 Part Number	
	SL-248	
3* 3D快拆把手 3D Locking Bracket	产品编号 Part Number	
	SL-267	

*选配配件 *Optional Part



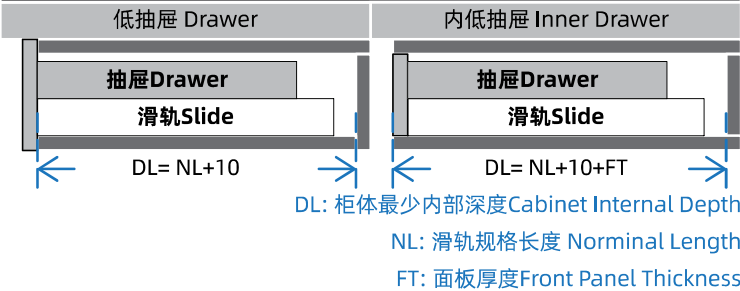
柜体所需空间 Cabinet Space Requirement






调节把手 | Locking Bracket



型号 Model: FH4801/FH5001(16mm/19mm)

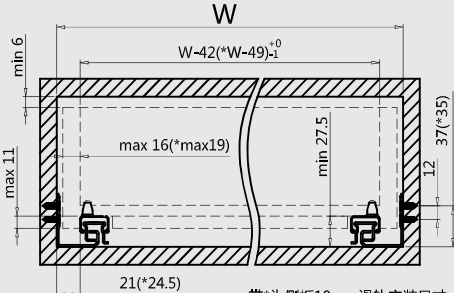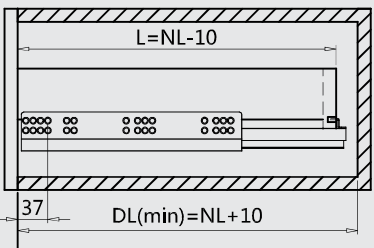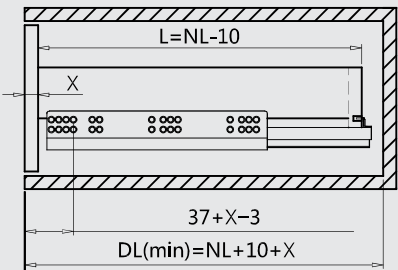安装信息 Installation Information

抽屉所需空间 Drawer Space Requirement	外置面板抽屉Frameless Drawer	内置面板抽屉Inner Drawer
 W: 柜子内部宽度 Cabinet Internal Width L: 抽屉深度 Drawer Depth DL: 柜体内部深度 Cabinet Internal Depth 带*为侧板19mm滑轨安装尺寸 The asterisk number is the installation size of 19mm thickness drawer slide	 L: 抽屉深度 Drawer Depth DL: 柜体内部深度 Cabinet Internal Depth	 NL: 滑轨规格长度 Slide Nominal Length X: 抽屉面板厚度 Front Panel Thickness

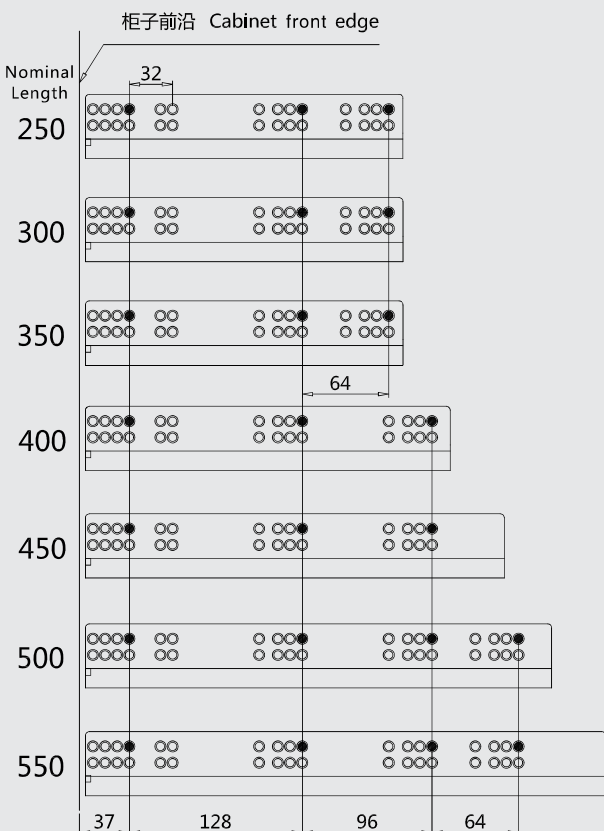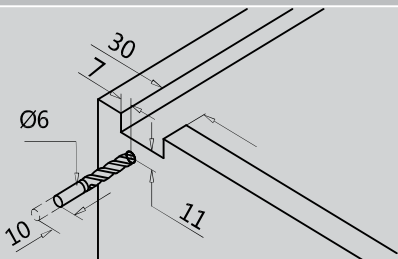滑轨安装孔位 Slide Fixing Postion	抽屉开孔 Drawer Drilling
 Nominal Length 250 300 350 400 450 500 550 32 64 37 128 96 64 柜子前沿 Cabinet front edge	 背面 Back Panel

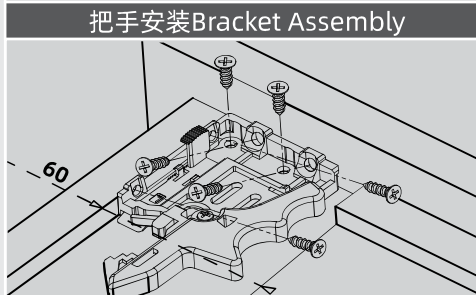

平头螺丝 Countersunk Screw	欧标螺丝 Euro Screw	圆头螺丝 Panhead Screw
		

同步全拉出缓冲隐藏轨
Synchronized Full Extension
Soft Close Undermount Slide



型号 Model: ZX4801T/ZX5001T(16B/19B)

调节把手 | Locking Bracket

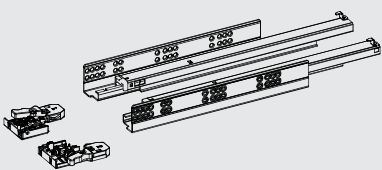


- 长度规格: 250mm-550mm
- 动态负荷: 35kg @ 18"
- 特点: 同步联动全展出, 缓冲闭合, 低噪音滑行, 抽屉免工具快速安装/拆卸
- 调节功能: 标配 3D 三维调节把手
- 材料厚度: 1.8mm/1.5mm/1.0mm
- Product Length: 250mm-550mm
- Dyanamic Loading Capacity: 35kg @ 18"
- Feature: Synchronized Full Ext., Soft Close, Silent ride, easy assemble/remove
- Adjustment: 3D Adjustment Bracket(Standard)
- Material Thickness: 1.8mm/1.5mm/1.0mm



液压式缓冲器
Hydraulic Soft Close Mechanism

产品信息 Product Information

尺寸-编号 Size-Part Num#			
1 全拉出隐藏轨Undermount Slide  包装Pack: 10 付/箱(Sets/CTN)	长度 Length	编号 Part Num#	
	300mm/12in	ZX4801T-300	ZX5001T-300
	350mm/14in	ZX4801T-350	ZX5001T-350
	400mm/16in	ZX4801T-400	ZX5001T-400
	450mm/18in	ZX4801T-450	ZX5001T-450
	500mm/20in	ZX4801T-500	ZX5001T-500
	550mm/22in	ZX4801T-550	ZX5001T-550
	侧板厚度Drawer Side Thickness	Max. 16mm	Max. 19mm




配件编号 Component Part #	
2 3D 调节把手 Locking Bracket(3D) 	SL-248




柜体所需空间 Cabinet Space Requirement	
外置面板抽屉Frameless Drawer	内置面板抽屉Inner Drawer
 抽屉Drawer 滑轨Slide DL= NL+10	 抽屉Drawer 滑轨Slide DL= NL+10+FT
DL: 柜体最少内部深度Cabinet Internal Depth	
NL: 滑轨规格长度 Norminal Length	
FT: 面板厚度Front Panel Thickness	



调节把手 | Locking Bracket

型号 Model: ZX4801T/ZX5001T(16B/19B)

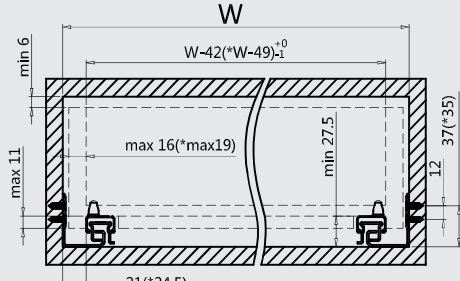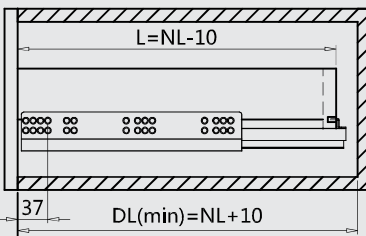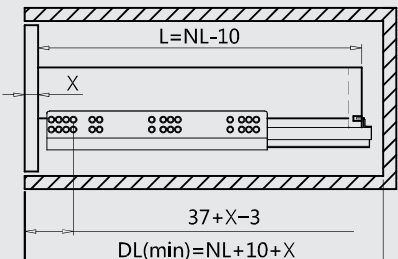安装信息 Installation Information

抽屉所需空间 Drawer Space Requirement	外置面板抽屉Frameless Drawer	内置面板抽屉Inner Drawer
 W: 柜子内部宽度 Cabinet Internal Width DL: 柜体内部深度 Cabinet Internal Depth	 L: 抽屉深度 Drawer Depth DL: 柜体内部深度 Cabinet Internal Depth	 NL: 滑轨规格长度 Slide Nominal Length X: 抽屉面板厚度 Front Panel Thickness
W: 柜子内部宽度 Cabinet Internal Width	L: 抽屉深度 Drawer Depth	NL: 滑轨规格长度 Slide Nominal Length
DL: 柜体内部深度 Cabinet Internal Depth	X: 抽屉面板厚度 Front Panel Thickness	

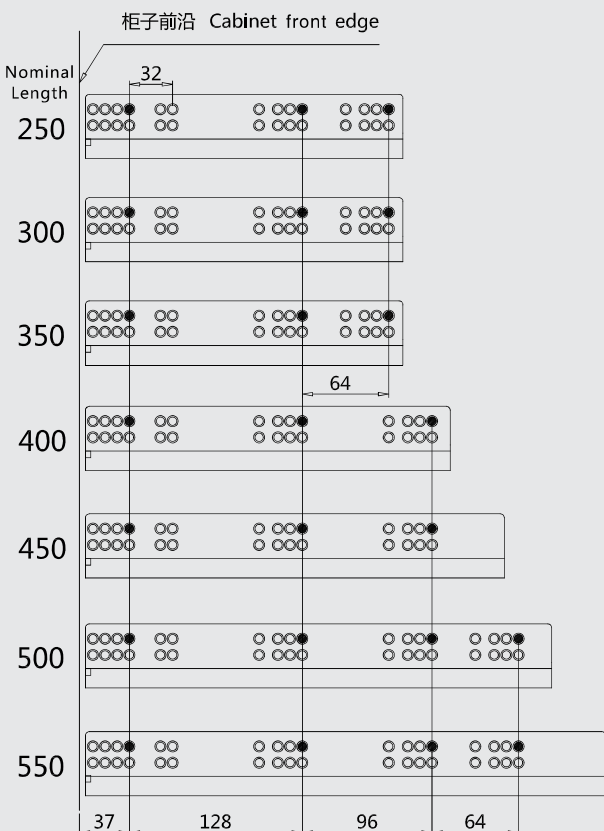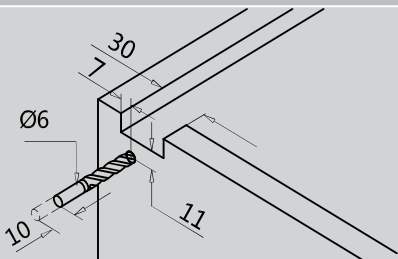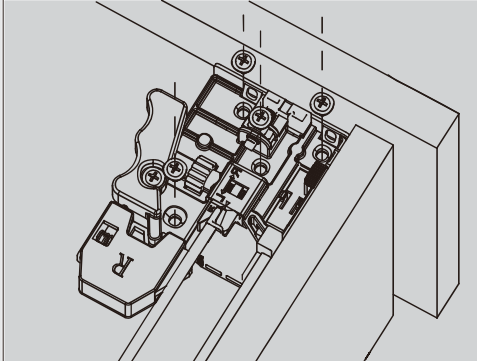滑轨安装孔位 Slide Fixing Postion	抽拉开孔 Drawer Drilling
 Nominal Length 250 300 350 400 450 500 550 32 64 37 128 96 64	 背面 Back Panel
	 把手安装 Bracket Assembly

平头螺丝 Countersunk Screw	欧标螺丝 Euro Screw	圆头螺丝 Panhead Screw
		

全拉出缓冲隐藏轨
Full Extension
Soft Close Undermount Slide



型号 Model: ZX4801/ZX5001(16B/19B)

调节把手 | Locking Bracket

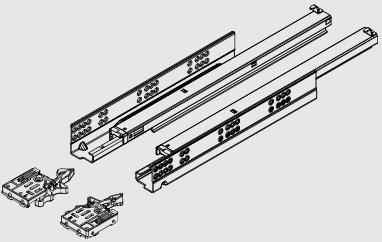


- 长度规格: 250mm-550mm
- 动态负荷: 35kg @ 18"
- 特点: 全展出, 缓冲闭合, 低噪音滑行, 抽屉免工具快速安装/拆卸
- 调节功能: 2D 高度调节 / 3D 三维调节*
- 材料厚度: 1.8mm/1.5mm/1.0mm
- Product Length: 250mm-550mm
- Dyanamic Loading Capacity: 35kg @ 18"
- Feature: Full Extension, Soft Close, Silent ride, easy assemble/remove
- Adjustment: 2D Height / 3D*
- Material Thickness: 1.8mm/1.5mm/1.0mm



液压式缓冲器
Hydraulic Soft Close Mechanism

产品信息 Product Information

尺寸-编号 Size-Part Num#			
1 全拉出隐藏轨Undermount Slide  包装Pack: 10 付/箱(Sets/CTN)	长度 Length	编号 Part Num#	
	250mm/10in	ZX4801-250	ZX5001-250
	300mm/12in	ZX4801-300	ZX5001-300
	350mm/14in	ZX4801-350	ZX5001-350
	400mm/16in	ZX4801-400	ZX5001-400
	450mm/18in	ZX4801-450	ZX5001-450
	500mm/20in	ZX4801-500	ZX5001-500
	550mm/22in	ZX4801-550	ZX5001-550
	侧板厚度Drawer Side Thickness	Max. 16mm	Max. 19mm

配件编号 Component Part #	
2 2D 调节把手 Locking Bracket(2D) 	SL-248
3* 3D 调节把手* Locking Bracket(3D)* 	SL-267




*选配配件 *Optional Part




柜体所需空间 Cabinet Space Requirement	
外置面板抽屉Frameless Drawer	内置面板抽屉Inner Drawer
 DL= NL+10	 DL= NL+10+FT
DL: 柜体最少内部深度Cabinet Internal Depth	
NL: 滑轨规格长度 Norminal Length	
FT: 面板厚度Front Panel Thickness	




调节把手 | Locking Bracket

型号 Model: ZX4801/ZX5001(16B/19B)

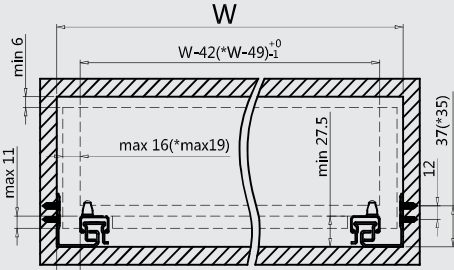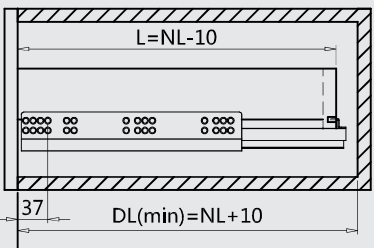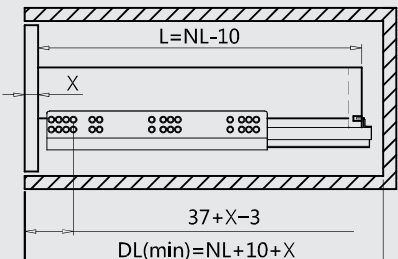安装信息 Installation Information

抽屉所需空间 Drawer Space Requirement	外置面板抽屉Frameless Drawer	内置面板抽屉Inner Drawer
 带*为侧板19mm滑轨安装尺寸 The asterisk number is the installation size of 19mm thickness drawer slide	 柜子前沿 Cabinet edge	 柜子前沿 Cabinet edge
W: 柜子内部宽度 Cabinet Internal Width	L: 抽屉深度 Drawer Depth	NL: 滑轨规格长度 Slide Nominal Length
DL: 柜体内部深度 Cabinet Internal Depth	X: 抽屉面板厚度 Front Panel Thickness	

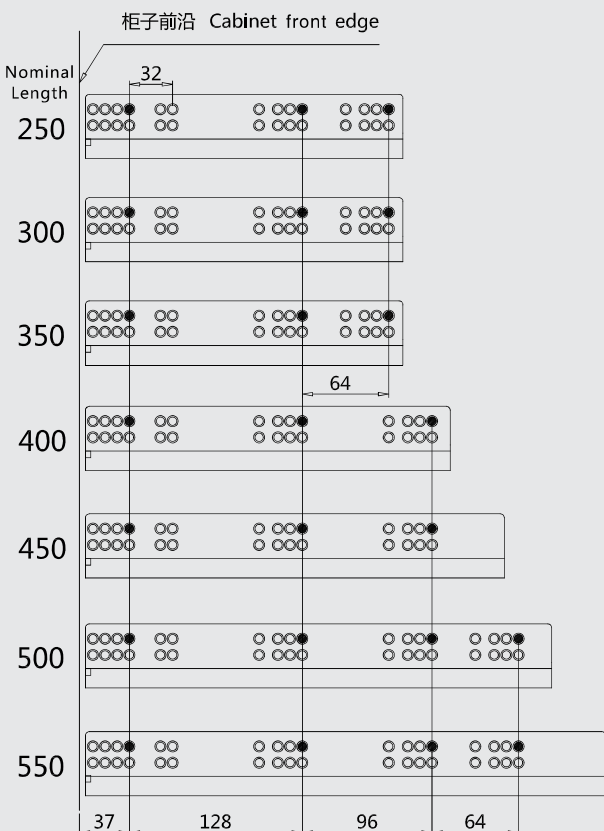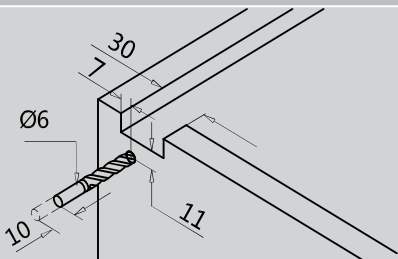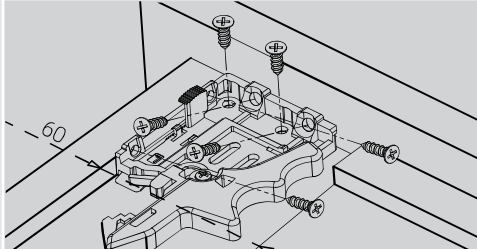滑轨安装孔位 Slide Fixing Postion	抽拉开孔 Drawer Drilling
 Nominal Length 250 300 350 400 450 500 550 32 64 37 128 96 64 柜子前沿 Cabinet front edge	 背面 Back Panel
	把手安装 Bracket Assembly
	

平头螺丝 Countersunk Screw	欧标螺丝 Euro Screw	圆头螺丝 Panhead Screw
		

全拉出缓冲隐藏轨
Full Extension
Soft Close Undermount Slide



型号 Model: ZX4802/ZX5002(16B/19B)


固定插销 | Locking Pin




- 长度规格: 250mm-550mm
- 动态负荷: 35kg @ 18"
- 特点: 全展出, 缓冲闭合, 低噪音滑行, 抽屉免工具快速安装/拆卸
- 调节功能: 螺杆高度调节 0-3mm
- 材料厚度: 1.8mm/1.5mm/1.0mm
- Product Length: 250mm-550mm
- Dyanamic Loading Capacity: 35kg @ 18"
- Feature: Full Extension, Soft Close, Silent ride, easy assemble/remove
- Adjustment: Height 0-3mm
- Material Thickness: 1.8mm/1.5mm/1.0mm



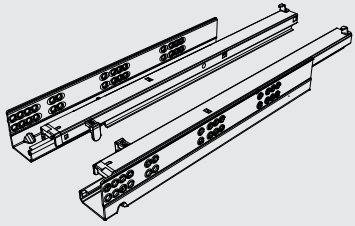产品信息 Product Information

尺寸-编号 Size-Part Num#			
1 全拉出隐藏轨Undermount Slide  包装Pack: 10 付/箱(Sets/CTN)	长度 Length	编号 Part Num#	
	250mm/10in	ZX4802-250	ZX5002-250
	300mm/12in	ZX4802-300	ZX5002-300
	350mm/14in	ZX4802-350	ZX5002-350
	400mm/16in	ZX4802-400	ZX5002-400
	450mm/18in	ZX4802-450	ZX5002-450
	500mm/20in	ZX4802-500	ZX5002-500
	550mm/22in	ZX4802-550	ZX5002-550
	侧板厚度Drawer Side Thickness	Max. 16mm	Max. 19mm

配件编号 Component Part #	
2 固定插销 Locking Pin 	SL-126

柜体所需空间 Cabinet Space Requirement	
外置面板抽屉Frameless Drawer	内置面板抽屉Inner Drawer
	
DL= NL+10	DL= NL+10+FT

DL: 柜体最少内部深度Cabinet Internal Depth

NL: 滑轨规格长度 Norminal Length



FT: 面板厚度Front Panel Thickness




型号 Model: ZX4802/ZX5002(16B/19B)

抽屉所需空间 Drawer Space Requirement	外置面板抽屉Frameless Drawer	内置面板抽屉Inner Drawer
W $W-42(*W-49)^{+0}_{-1}$ min 6 max 11 max 16(*max19) min 27.5 37(*35) 12 21(*24.5) 带*为侧板19mm滑轨安装尺寸 The asterisk number is the installation size of 19mm thickness drawer slide	L=NL-10 37 DL(min)=NL+10 柜子前沿 Cabinet edge	L=NL-10 X 37+X-3 DL(min)=NL+10+X 柜子前沿 Cabinet edge
W: 柜子内部宽度Cabinet Internal Width	L: 抽屉深度Drawer Depth	NL: 滑轨规格长度 Slide Nominal Length
DL: 柜体内部深度Cabinet Internal Depth	X: 抽屉面板厚度Front Panel Thickness	

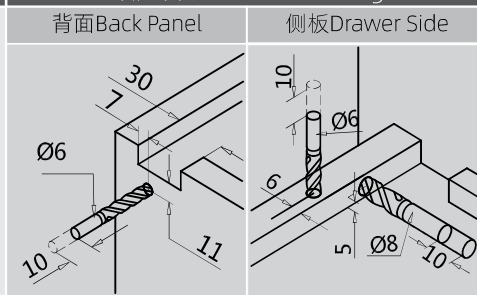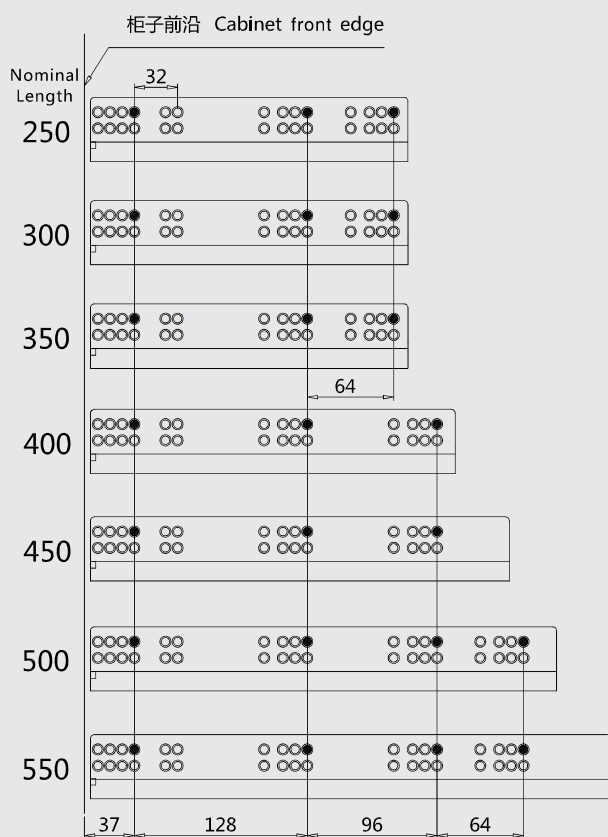
抽屉开孔Drawer Drilling



抽屉底部Drawer Bottom

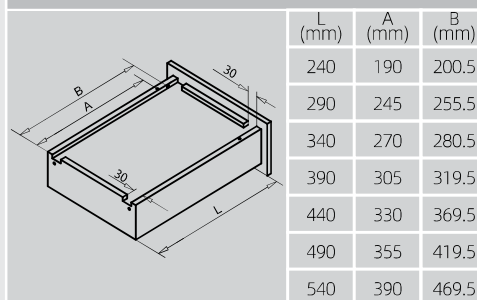



把手安装Bracket Assembly

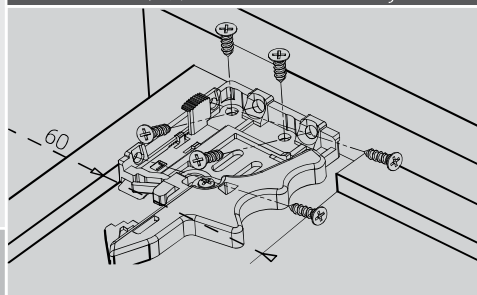

平头螺丝
Countersunk Screw

欧标螺丝
Euro Screw

圆头螺丝
Panhead Screw



全拉出反弹隐藏轨
Full Extension
Push-Open Undermount slide



型号 Model: 4801EX/5001EX(16B/19B)

调节把手 | Locking Bracket



- 长度规格: 250mm-550mm
- 动态负荷: 35kg @ 18"
- 特点: 全展出, 按压弹出, 低噪音滑行, 抽屉免工具快速安装/拆卸
- 调节功能: 2D 把手高度调节 / 3D 三维调节*
- 材料厚度: 1.8mm/1.5mm/1.0mm
- Product Length: 250mm-550mm
- Dyanamic Loading Capacity: 35kg @ 18"
- Feature: Full Extension, Push to Open, Silent ride, easy assemble/remove
- Adjustment: 2D Height / 3D*
- Material Thickness: 1.8mm/1.5mm/1.0mm



全盖式反弹器
Push to Open Mechanism

产品信息 Product Information

套装包装 Completed Packaging

1	全拉出隐藏轨Undermount Slide	长度 Length		编号 Part Num#	
		250mm/10in		4801EX-250	5001EX-250
		300mm/12in		4801EX-300	5001EX-300
		350mm/14in		4801EX-350	5001EX-350
		400mm/16in		4801EX-400	5001EX-400
		450mm/18in		4801EX-450	5001EX-450
		500mm/20in		4801EX-500	5001EX-500
		550mm/22in		4801EX-550	5001EX-550
		侧板厚度Drawer Side Thickness		Max. 16mm	Max. 19mm


包装Pack: 10 付/箱(Sets/CTN)

标准配件 Standard Accessories Part

2	2D快拆把手 2D Locking Bracket	产品编号 Part Number
		SL-248
3*	3D快拆把手 3D Locking Bracket	产品编号 Part Number
		SL-267

*选配配件 *Optional Part



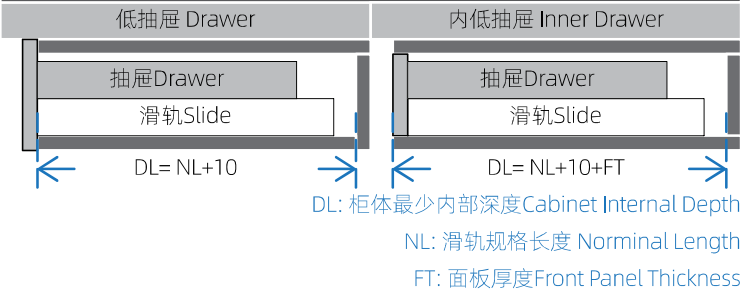
柜体所需空间 Cabinet Space Requirement






调节把手 | Locking Bracket



型号 Model: 4801EX/5001EX(16B/19B)

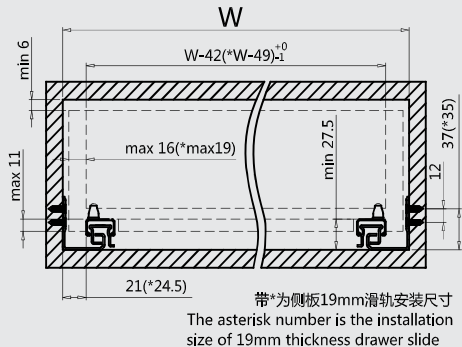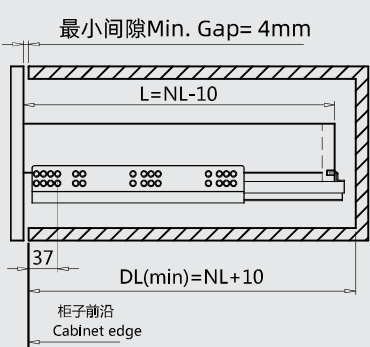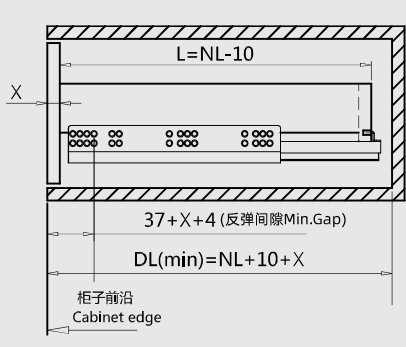安装信息 Installation Information

抽屉所需空间 Drawer Space Requirement	外置面板抽屉Frameless Drawer	内置面板抽屉Inner Drawer
 W: 柜子内部宽度 Cabinet Internal Width DL: 柜体内部深度 Cabinet Internal Depth	 L: 抽屉深度 Drawer Depth X: 抽屉面板厚度 Front Panel Thickness	 NL: 滑轨规格长度 Slide Nominal Length

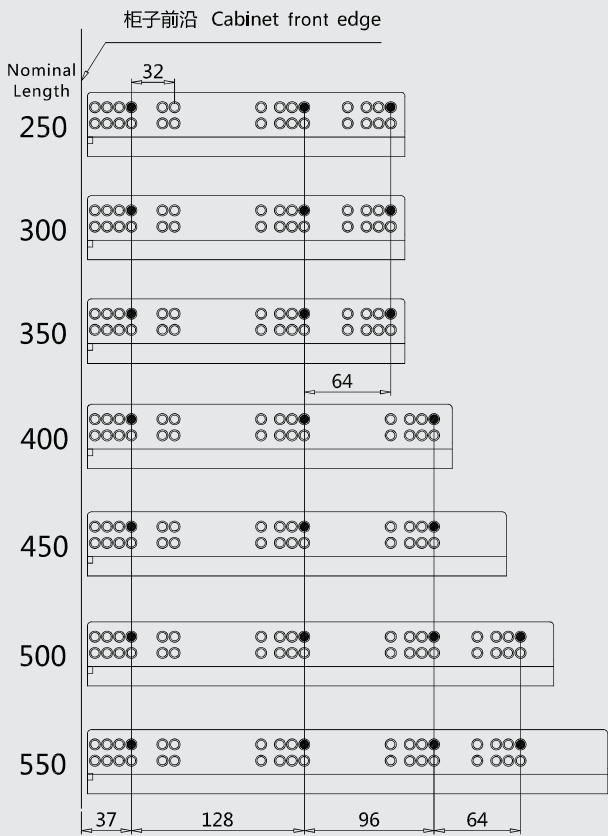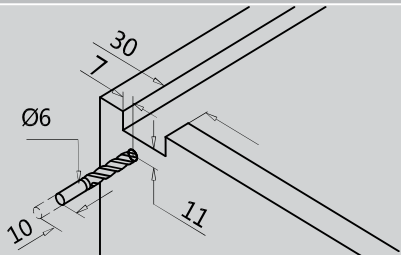滑轨安装孔位 Slide Fixing Postion	抽屉开孔 Drawer Drilling
 Nominal Length 32 64 37 128 96 64	 背面 Back Panel

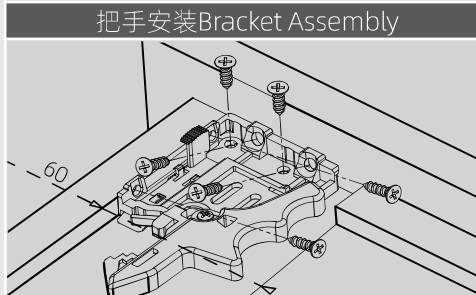

平头螺丝 Countersunk Screw	欧标螺丝 Euro Screw	圆头螺丝 Panhead Screw
		

全拉出反弹隐藏轨
Full Extension
Push-Open Undermount slide



型号 Model: 4802EX/5002EX(16B/19B)

调节螺丝 | Locking Pin

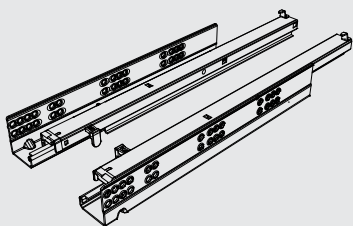


- 长度规格: 250mm-550mm
- 动态负荷: 35kg @ 18"
- 特点: 全展出, 按压弹出, 低噪音滑行, 抽屉免工具快速安装/拆卸
- 调节功能: 螺杆高度调节 0-3mm
- 材料厚度: 1.8mm/1.5mm/1.0mm
- Product Length: 250mm-550mm
- Dyanamic Loading Capacity: 35kg @ 18"
- Feature: Full Extension, Push to Open, Silent ride, easy assemble/remove
- Adjustment: Height 0-3mm
- Material Thickness: 1.8mm/1.5mm/1.0mm




产品信息 Product Information

套装包装 Completed Packaging

1 全拉出隐藏轨Undermount Slide  包装Pack: 10 付/箱(Sets/CTN)	长度 Length	编号 Part Num#	
	250mm/10in	4802EX-250	5002EX-250
	300mm/12in	4802EX-300	5002EX-300
	350mm/14in	4802EX-350	5002EX-350
	400mm/16in	4802EX-400	5002EX-400
	450mm/18in	4802EX-450	5002EX-450
	500mm/20in	4802EX-500	5002EX-500
	550mm/22in	4802EX-550	5002EX-550
	侧板厚度Drawer Side Thickness	Max. 16mm	Max. 19mm

配件编号 Component Part #

2 插销 Bolt	
	产品编号 Part Number
	SL-126




柜体所需空间 Cabinet Space Requirement

低抽屉 Drawer	内低抽屉 Inner Drawer
	
DL= NL+10	DL= NL+10+FT
DL: 柜体最少内部深度Cabinet Internal Depth	
NL: 滑轨规格长度 Norminal Length	
FT: 面板厚度Front Panel Thickness	

调节螺丝 | Locking Pin

型号 Model: 4802EX/5002EX(16B/19B)

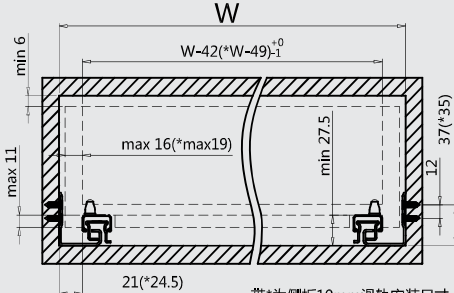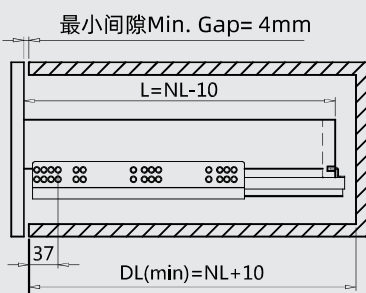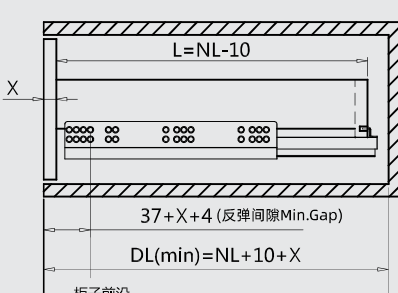安装信息 Installation Information

抽屉所需空间 Drawer Space Requirement	外置面板抽屉Frameless Drawer	内置面板抽屉Inner Drawer
 W: 柜子内部宽度 Cabinet Internal Width DL: 柜体内部深度 Cabinet Internal Depth	 L: 抽屉深度 Drawer Depth X: 抽屉面板厚度 Front Panel Thickness	 NL: 滑轨规格长度 Slide Nominal Length

滑轨安装孔位 Slide Fixing Postion

柜子前沿 Cabinet front edge

Nominal Length

250

300

350

400

450

500

550

32

64

37 128 96 64



抽屉开孔 Drawer Drilling

背面 Back Panel

侧板 Drawer Side

抽屉底部 Drawer Bottom

L (mm)	A (mm)	B (mm)
240	190	200.5
290	245	255.5
340	270	280.5
390	305	319.5
440	330	369.5
490	355	419.5
540	390	469.5


平头螺丝 Countersunk Screw	欧标螺丝 Euro Screw	圆头螺丝 Panhead Screw
		

同步杆·全拉出反弹隐藏轨
Full Extension with Synchronized Bar
Push-Open Undermount slide



型号 Model: ZX4801R/ZX5001R(16mm/19mm)

调节把手 | Locking Bracket



- 长度规格: 250mm-550mm
- 动态负荷: 35kg @ 18"
- 特点: 同步全展出, 按压弹出, 低噪音滑行, 抽屉免工具快速安装/拆卸
- 调节功能: 2D 把手高度调节 / 3D 三维调节*
- 材料厚度: 1.8mm/1.5mm/1.0mm
- Product Length: 250mm-550mm
- Dyanamic Loading Capacity: 35kg @ 18"
- Feature: Synch Full Extension, Push to Open, Silent ride, easy assemble/remove
- Adjustment: 2D Height / 3D*
- Material Thickness: 1.8mm/1.5mm/1.0mm

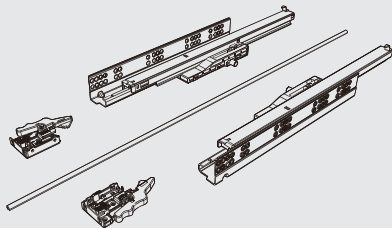


产品信息 Product Information

套装包装 Completed Packaging

1

全拉出隐藏轨Undermount Slide



包装Pack: 10 付/箱(Sets/CTN)

长度 Length	编号 Part Num#	
250mm/10in	ZX4801R-250	ZX5001R-250
300mm/12in	ZX4801R-300	ZX5001R-300
350mm/14in	ZX4801R-350	ZX5001R-350
400mm/16in	ZX4801R-400	ZX5001R-400
450mm/18in	ZX4801R-450	ZX5001R-450
500mm/20in	ZX4801R-500	ZX5001R-500
550mm/22in	ZX4801R-550	ZX5001R-550
侧板厚度Drawer Side Thickness	Max. 16mm	Max. 19mm

标准配件 Standard Accessories Part

2	2D快拆把手 2D Locking Bracket	产品编号 Part Number
		SL-248
3*	3D快拆把手 3D Locking Bracket	产品编号 Part Number
		SL-267

*选配配件 *Optional Part




柜体所需空间 Cabinet Space Requirement



低抽屉 Drawer		内低抽屉 Inner Drawer	
			
$DL = NL + 10$		$DL = NL + 10 + FT$	
DL: 柜体最少内部深度Cabinet Internal Depth			
NL: 滑轨规格长度 Norminal Length			
FT: 面板厚度Front Panel Thickness			



调节把手 | Locking Bracket


型号 Model: ZX4801R/ZX5001R(16mm/19mm)

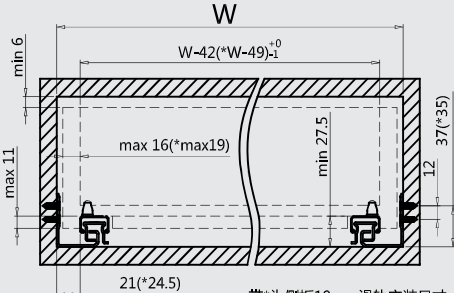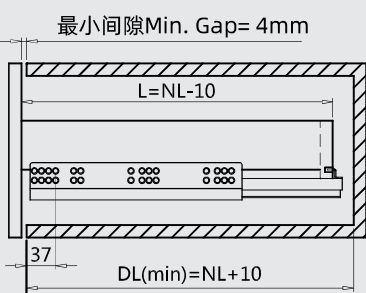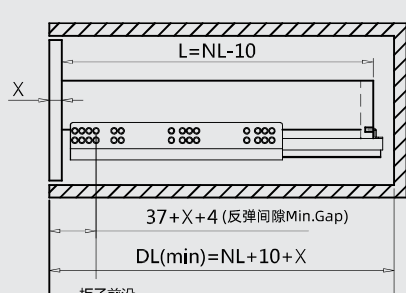安装信息 Installation Information

抽屉所需空间 Drawer Space Requirement	外置面板抽屉Frameless Drawer	内置面板抽屉Inner Drawer
 W: 柜子内部宽度 Cabinet Internal Width DL: 柜体内部深度 Cabinet Internal Depth	 L: 抽屉深度 Drawer Depth X: 抽屉面板厚度 Front Panel Thickness	 NL: 滑轨规格长度 Slide Nominal Length

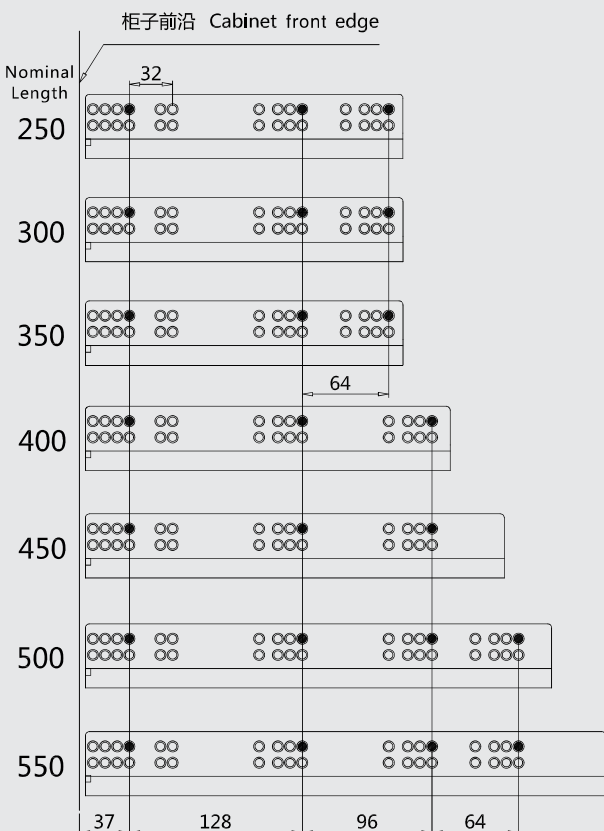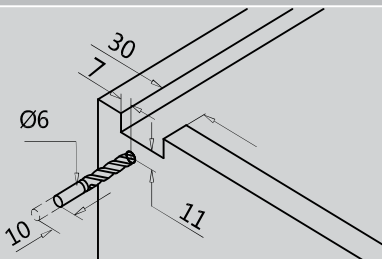滑轨安装孔位 Slide Fixing Postion	抽拉开孔 Drawer Drilling
 柜体前缘 Cabinet front edge	 背面 Back Panel

平头螺丝 Countersunk Screw	欧标螺丝 Euro Screw	圆头螺丝 Panhead Screw
		

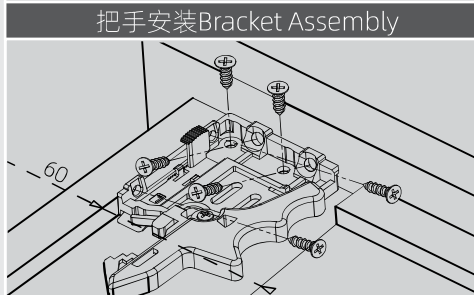

二节全拉出缓冲隐藏轨
Full Extension
Soft Close Undermount Slide



型号 Model: 3602/3802(16mm/19mm)

插销款 | Screw Adjustment



- 长度规格: 250mm-550mm
- 动态负荷:20kg @18"
- 特点: 两节轨全拉出, 插销固定, 全盖式防尘缓冲器
- 调节功能:±3mm可调高度螺杆
- 材料厚度: 1.5mm/1.5mm
- Product Length: 230mm-500mm
- Dyanamic Loading Capacity: 25kg @ 18"
- Feature: 2 Section Slide with Full Extension, Pin Lock, Full Covered Soft Closing Mechanism
- Adjustment: ±3mmHeight Adjustment Screw
- Material Thickness: 1.5mm/1.5mm




液压式缓冲器
Hydraulic Soft Close Mechanism

产品信息 Product Information

套装包装 Completed Packaging

1	滑轨Slide	长度 Length		编号 Part Num#	
		250mm/10in	3602-250	3802-250	
		300mm/12in	3602-300	3802-300	
		350mm/14in	3602-350	3802-350	
		400mm/16in	3602-400	3802-400	
		450mm/18in	3602-450	3802-450	
		侧板厚度Drawer Side Thickness	Max. 16mm	Max. 19mm	



包装Pack: 10 付/箱(Sets/CTN)



型号 Model: 3602/3802(16mm/19m)

抽屜所需空間
Drawer Space Requirement



← Cabinet Front Edge 柜体前缘

37

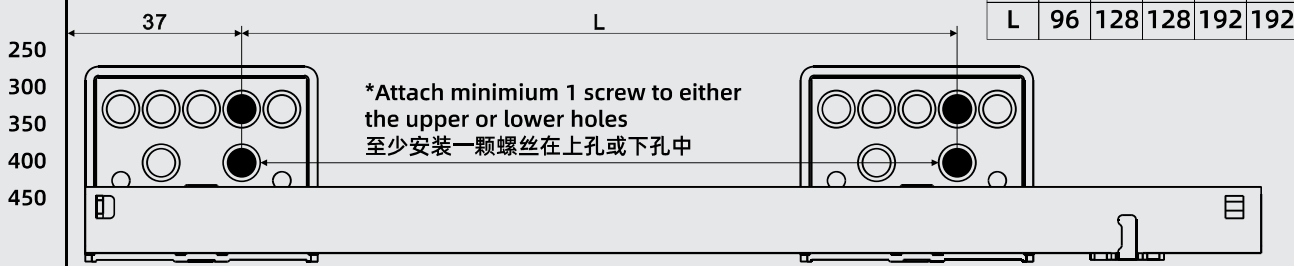
$DL(min)=NL+10$

$$DL(\min) = NL + 10$$

NL: 滑轨规格长度 Slide Nominal Lenght

X: 抽屜面板厚度Front Panel Thickness

NL ← Cabinet Front Edge 柜体前缘



NL	250	300	350	400	450
L	96	128	128	192	192

NL	A
250	175
300	200
350	245
400	270
450	305

NL	A	B
250	175	195
300	200	220
350	245	265
400	270	290
450	305	325

Technical drawing of a screw with dimensions: head diameter $\varnothing 7.0$, length 14, and thread diameter $\varnothing 4.0$.

Technical drawing of a bolt. The drawing shows a bolt with a hexagonal head and a threaded shank. The dimensions are: head diameter Ø8.0, shank length 11, and shank diameter Ø6.0.




二节半拉出缓冲隐藏轨(钢珠轨平替款)
Single Extension
Soft Close Undermount Slide (Direct Swap)



型号 Model: 3603

插销款 | Screw Adjustment

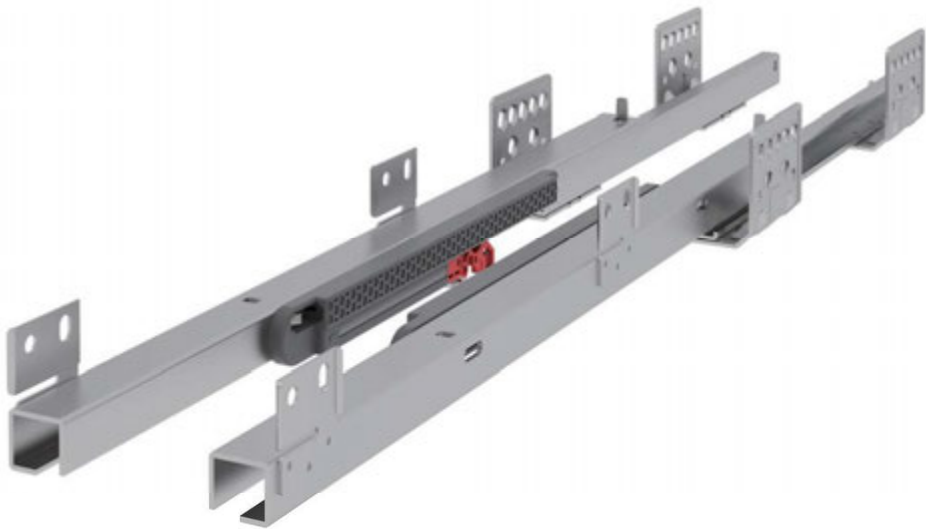


- 长度规格: 250mm-500mm
- 动态负荷: 25kg @18"
- 特点: 钢珠轨抽屉直接安装, 插销固定, 全盖式防尘缓冲器
- 调节功能: $\pm 3\text{mm}$ 可调高度螺杆
- 材料厚度: 1.5mm/1.5mm
- Product Length: 250mm-500mm
- Dyanamic Loading Capacity: 25kg @ 18"
- Feature: BBR Drawer Direct Swap, Pin Lock, FullCovered soft Closing Mechanism
- Adjustment: $\pm 3\text{mm}$ Height Adjustment Screw
- Material Thickness: 1.5mm/1.5mm



液压式缓冲器
Hydraulic Soft Close Mechanism

产品信息 Product Information

套装包装 Completed Packaging


1	滑轨 Slide	长度 Length	编号 Part Num#
		250mm/10in	3603-250
		300mm/12in	3603-300
		350mm/14in	3603-350
		400mm/16in	3603-400
		450mm/18in	3603-450
		侧板厚度Drawer Side Thickness	Max. 16mm

包装Pack: 10 付/箱(Sets/CTN)

插销款 | Screw Adjustment


型号 Model: 3603

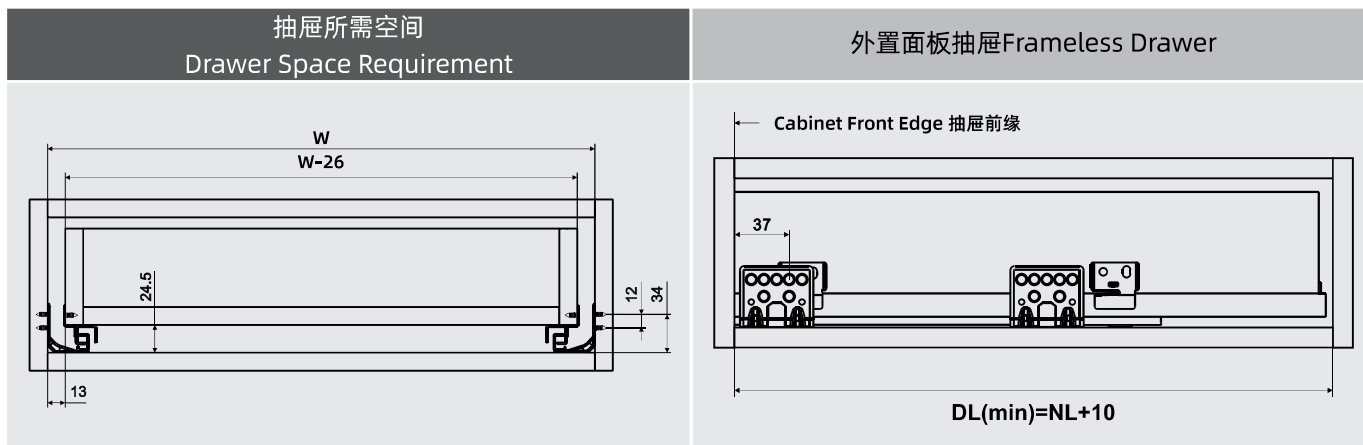安装信息 Installation Information






W: 柜子内部宽度Cabinet Internal Width	L: 抽屉深度Drawer Depth	NL: 滑轨规格长度 Slide Nominal Length
DL: 柜体内部深度Cabinet Internal Depth	X: 抽屉面板厚度Front Panel Thickness	

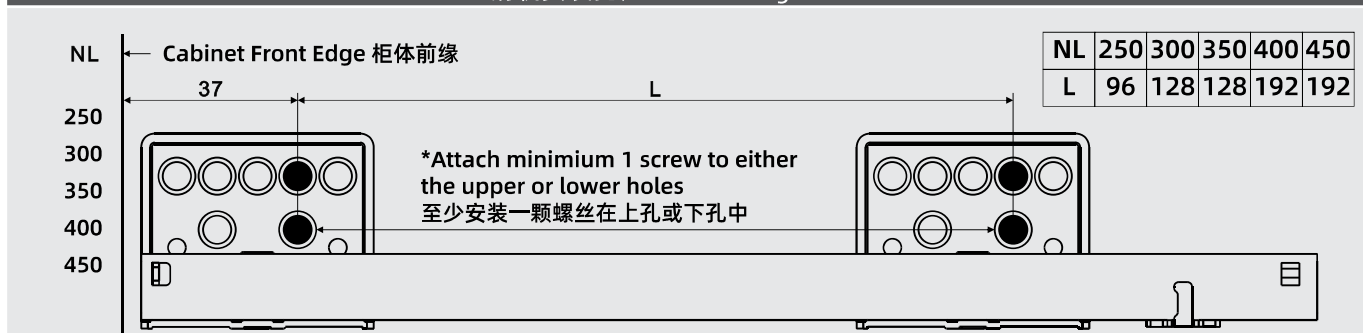滑轨安装孔位 Slide Fixing Postion



抽屉安装孔位 Drawer Fixing Postion

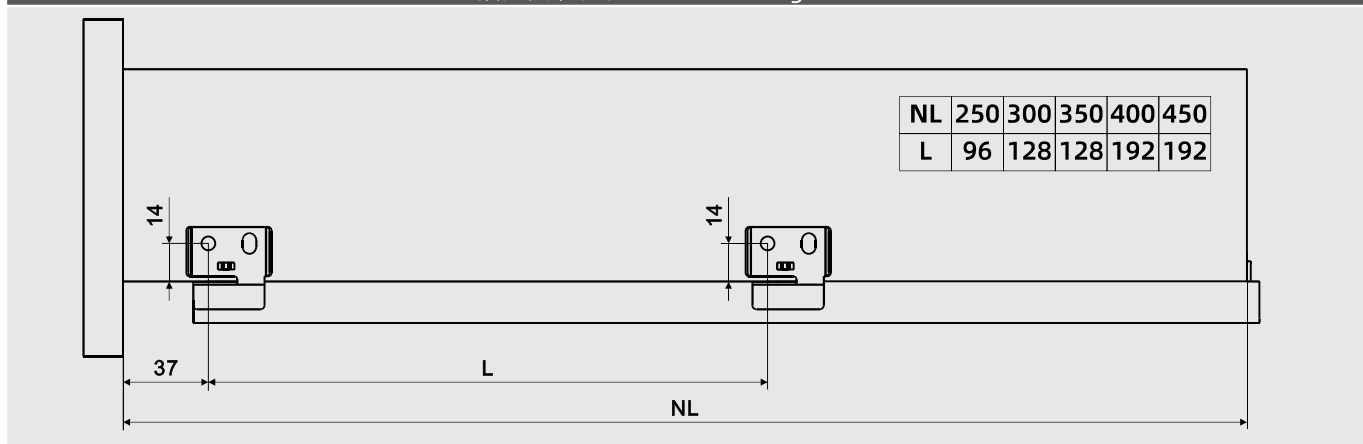

平头螺丝 Countersunk Screw	欧标螺丝 Euro Screw	圆头螺丝 Panhead Screw
		

二节半拉出缓冲隐藏轨(钢珠轨平替款A)
Single Extension
Soft Close Undermount Slide (Direct Swap A)



型号 Model: 3603A

插销款 | Screw Adjustment




- 长度规格: 250mm-500mm
- 动态负荷: 25kg @18"
- 特点: 钢珠轨抽屉直接安装, 插销固定, 全盖式防尘缓冲器
- 调节功能: ± 3 mm可调高度螺杆
- 材料厚度: 1.5mm/1.5mm
- Product Length: 250mm-500mm
- Dyanamic Loading Capacity: 25kg @ 18"
- Feature: BBR Drawer Direct Swap, Pin Lock, FullCovered soft Closing Mechanism
- Adjustment: ± 3 mmHeight Adjustment Screw
- Material Thickness: 1.5mm/1.5mm



液压式缓冲器
Hydraulic Soft Close Mechanism

产品信息 Product Information

套装包装 Completed Packaging

1	滑轨Slide	长度 Length	编号 Part Num#
		250mm/10in	3603A-250
		300mm/12in	3603A-300
		350mm/14in	3603A-350
		400mm/16in	3603A-400
		450mm/18in	3603A-450
		侧板厚度Drawer Side Thickness	Max. 16mm


包装Pack: 10 付/箱(Sets/CTN)

插销款 | Screw Adjustment


型号 Model: 3603A

安装信息 Installation Information

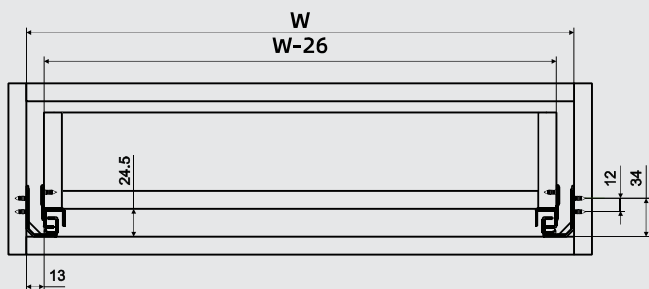抽屉所需空间
Drawer Space Requirement



外置面板抽屉Frameless Drawer

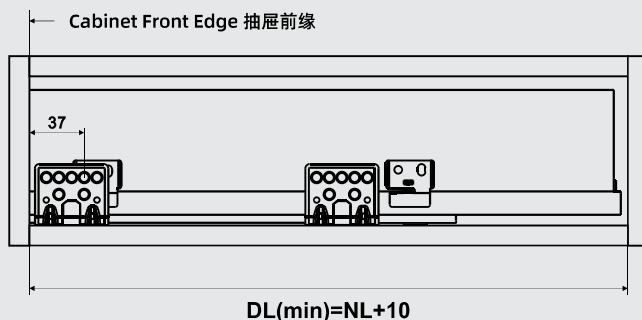

W: 柜子内部宽度 Cabinet Internal Width

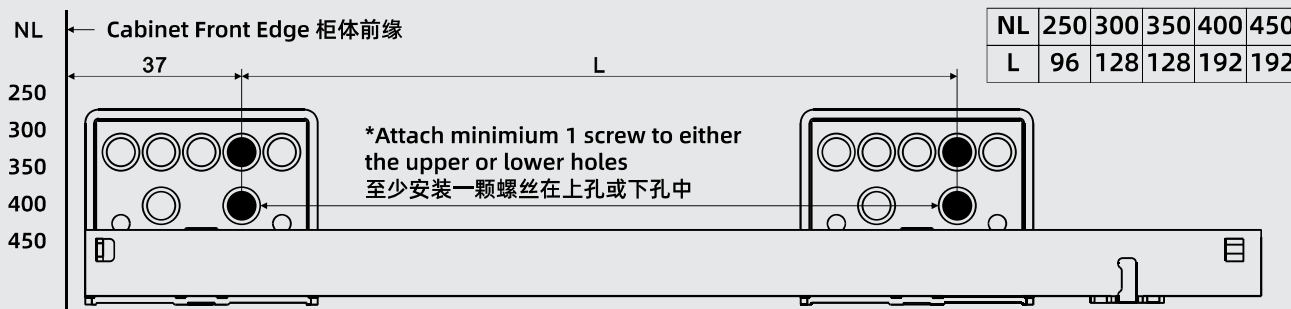
L: 抽屉深度 Drawer Depth

NL: 滑轨规格长度 Slide Nominal Length


DL: 柜体内部深度 Cabinet Internal Depth

X: 抽屉面板厚度 Front Panel Thickness

滑轨安装孔位 Slide Fixing Postion





抽屉安装孔位 Drawer Fixing Postion

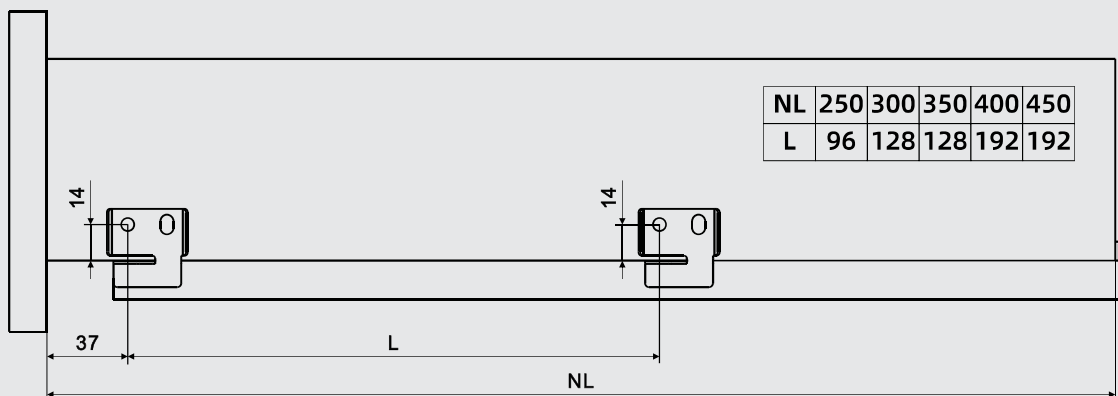

平头螺丝
Countersunk Screw

欧标螺丝
Euro Screw

圆头螺丝
Panhead Screw



半拉出缓冲隐藏轨
Single Extension
SoftClose Undermount Slide



型号 Model: ZX3901 / ZX4001(16B/19B)

调节把手 | Locking Bracket



- 长度规格: 250mm-550mm
- 动态负荷: 25kg @ 18"
- 特点: 半展出, 缓冲闭合, 低噪音滑行, 抽屉免工具快速安装/拆卸
- 调节功能: 2D 把手高度调节
- 材料厚度: 1.5mm/1.5mm
- Product Length: 250mm-550mm
- Dyanamic Loading Capacity: 25kg @ 18"
- Feature: Single Extension, Soft Close, Silent ride, easy assemble/remove
- Adjustment: 2D Height
- Material Thickness: 1.5mm/1.5mm




液压式缓冲器
Hydraulic Soft Close Mechanism

产品信息 Product Information

套装包装 Completed Packaging

1 全拉出隐藏轨Undermount Slide	长度 Length		编号 Part Num#	
	250mm/10in		ZX3901-250	ZX4001-250
	300mm/12in		ZX3901-300	ZX4001-300
	350mm/14in		ZX3901-350	ZX4001-350
	400mm/16in		ZX3901-400	ZX4001-400
	450mm/18in		ZX3901-450	ZX4001-450
	500mm/20in		ZX3901-500	ZX4001-500
	550mm/22in		ZX3901-550	ZX4001-550
包装Pack: 10 付/箱(Sets/CTN)		侧板厚度Drawer Side Thickness	Max. 16mm	Max. 19mm

配件编号 Component Part #

2 2D快拆把手 2D Locking Bracket	产品编号 Part Number
	SL-247




柜体所需空间 Cabinet Space Requirement



低抽屉 Drawer	内低抽屉 Inner Drawer
	
DL= NL+10	DL= NL+10+FT
DL: 柜体最少内部深度Cabinet Internal Depth	
NL: 滑轨规格长度 Norminal Length	
FT: 面板厚度Front Panel Thickness	


调节把手 | Locking Bracket



型号 Model: ZX3901/ ZX4001(16B/19B)

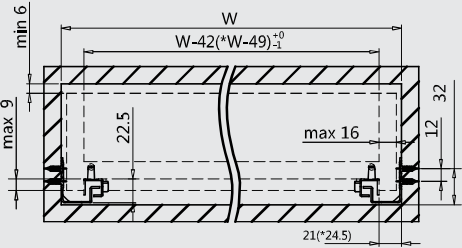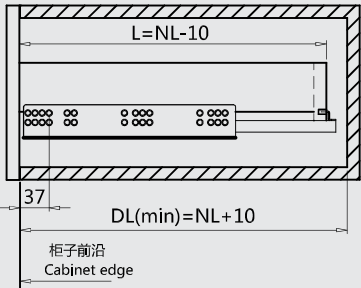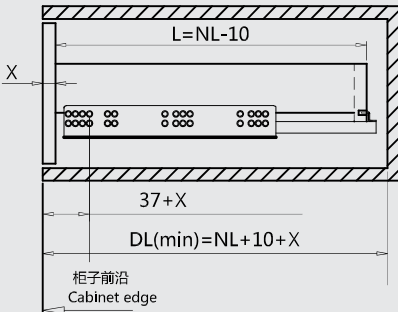安装信息 Installation Information

抽屉所需空间 Drawer Space Requirement	外置面板抽屉Frameless Drawer	内置面板抽屉Inner Drawer
 W: 柜子内部宽度 Cabinet Internal Width DL: 柜体内部深度 Cabinet Internal Depth	 L: 抽屉深度 Drawer Depth X: 抽屉面板厚度 Front Panel Thickness	 NL: 滑轨规格长度 Slide Nominal Length

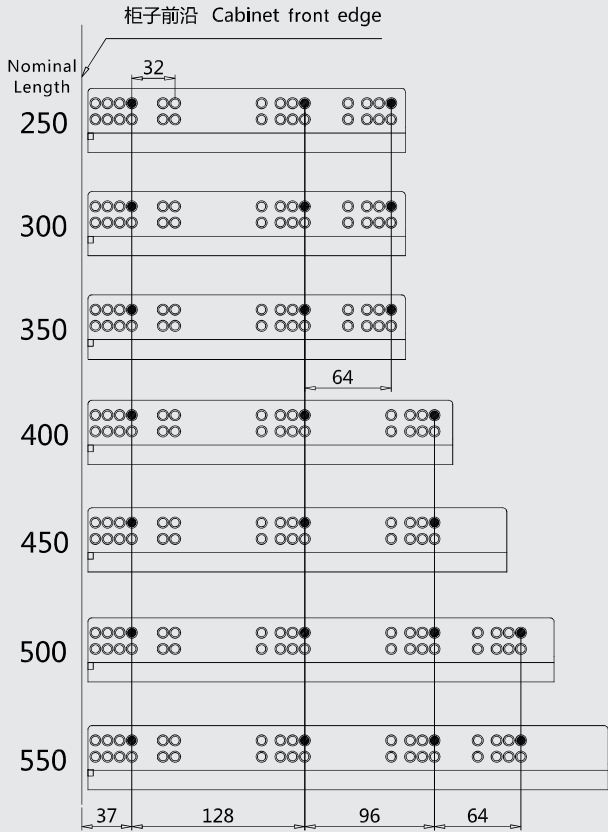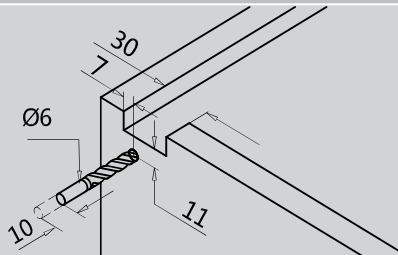滑轨安装孔位 Slide Fixing Postion	抽屉开孔 Drawer Drilling
	

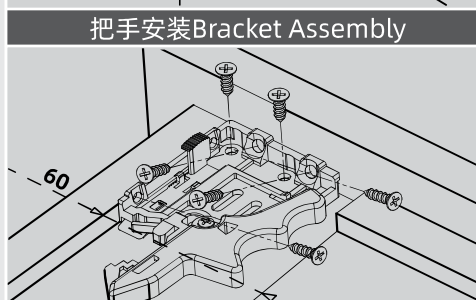

平头螺丝 Countersunk Screw	欧标螺丝 Euro Screw	圆头螺丝 Panhead Screw
		

半拉出缓冲隐藏轨
Single Extension
SoftClose Undermount Slide



型号 Model: ZX3905/ZX4005(16B/19B)

调节螺丝 | Locking Pin



- 长度规格: 250mm-550mm
- 动态负荷: 25kg @ 18"
- 特点: 半展出, 缓冲闭合, 低噪音滑行, 抽屉免工具快速安装/拆卸
- 调节功能: 螺杆高度调节 0-3mm
- 材料厚度: 1.5mm/1.5mm
- Product Length: 250mm-550mm
- Dyanamic Loading Capacity: 35kg @ 18"
- Feature: Single Extension, Soft Close, Silent ride, easy assemble/remove
- Adjustment: Height 0-3mm
- Material Thickness: 1.5mm/1.5mm



产品信息 Product Information


套装包装 Completed Packaging

1 全拉出隐藏轨Undermount Slide	长度 Length		编号 Part Num#	
	250mm/10in		ZX3905-250	ZX4005-250
	300mm/12in		ZX3905-300	ZX4005-300
	350mm/14in		ZX3905-350	ZX4005-350
	400mm/16in		ZX3905-400	ZX4005-400
	450mm/18in		ZX3905-450	ZX4005-450
	500mm/20in		ZX3905-500	ZX4005-500
	550mm/22in		ZX3905-550	ZX4005-550
包装Pack: 10 付/箱(Sets/CTN)		侧板厚度Drawer Side Thickness	Max. 16mm	Max. 19mm

标准配件 Standard Accessories Part

2 插销 Bolt	
	产品编号 Part Number
	SL-135



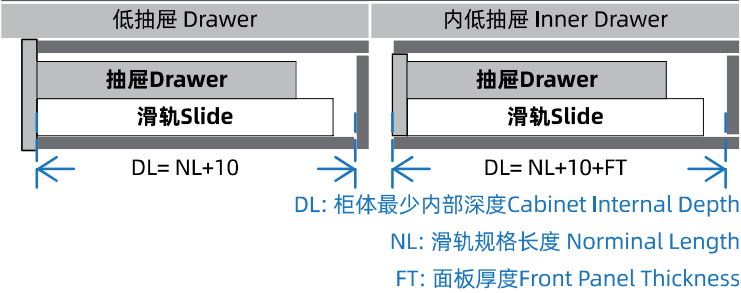
柜体所需空间 Cabinet Space Requirement




调节螺丝 | Locking Pin

型号 Model: ZX3905/ZX4005(16B/19B)

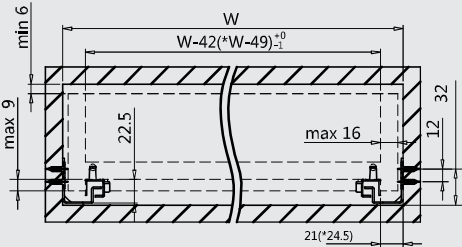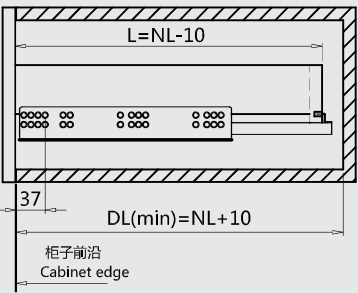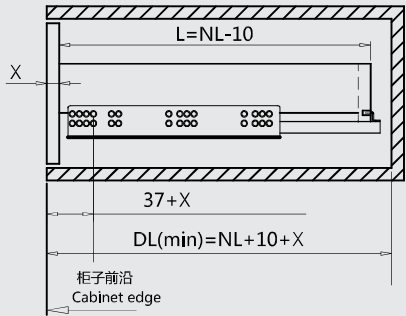
安装信息 Installation Information

抽屉所需空间 Drawer Space Requirement	外置面板抽屉Frameless Drawer	内置面板抽屉Inner Drawer
 带*为侧板19mm滑轨安装尺寸 The asterisk number is the installation size of 19mm thickness drawer slide		
W: 柜子内部宽度Cabinet Internal Width	L: 抽屉深度Drawer Depth	NL: 滑轨规格长度 Slide Nominal Length
DL: 柜体内部深度Cabinet Internal Depth	X: 抽屉面板厚度Front Panel Thickness	

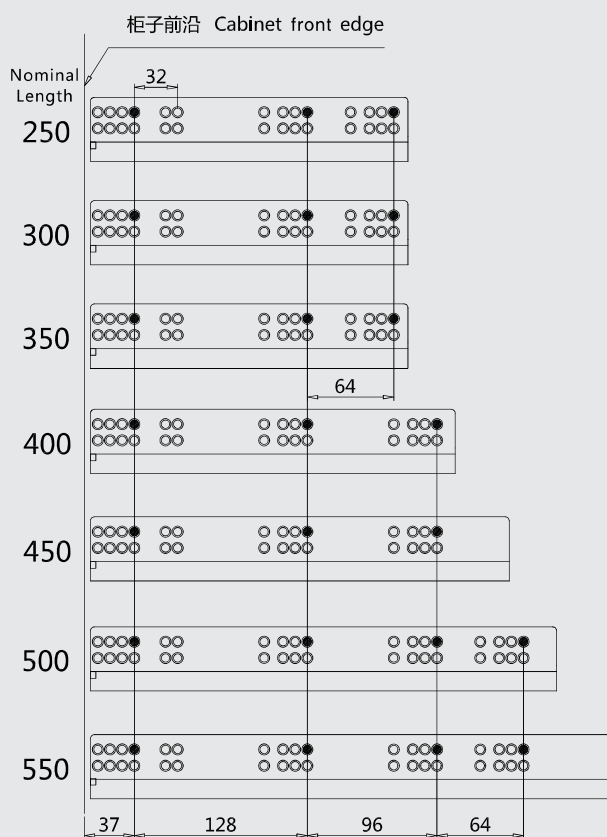滑轨安装孔位 Slide Fixing Postion



抽屉开孔Drawer Drilling

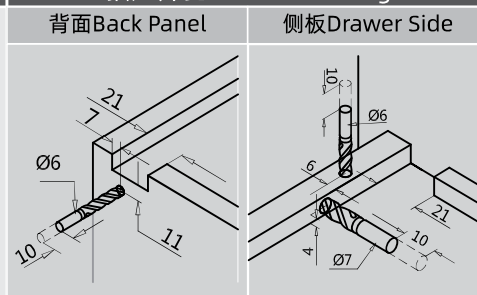

抽屉底部Drawer Bottom



A technical drawing of a rectangular box, likely a component of a larger assembly. The drawing shows the box from an isometric perspective. The dimensions are labeled as follows: L (length), A (width), B (height), and 21 (thickness of the side panel). The box has a flat bottom and four vertical side panels. The top edge of the front panel is labeled L, the top edge of the side panel is labeled A, and the height of the side panel is labeled B. The thickness of the side panel is labeled 21. The bottom edge of the front panel is also labeled L. The bottom edge of the side panel is labeled A. The bottom edge of the side panel is labeled B. The bottom edge of the side panel is labeled 21.

L (mm)	A (mm)	B (mm)
240	188	220
290	213	245
340	238	270
390	273	305
440	298	330
490	323	355
540	358	390

平头螺丝
Countersunk Screw

欧标螺丝
Euro Screw

圆头螺丝
Panhead Screw




半拉出反弹隐藏轨
Single Extension
Push-Open Undermount Slide



型号 Model: 3901EX/4001EX(16B/19B)

调节把手 | Locking Bracket




- 长度规格: 250mm-550mm
- 动态负荷: 25kg @ 18"
- 特点: 半展出, 按压弹出, 低噪音滑行, 抽屉免工具快速安装/拆卸
- 调节功能: 2D 把手高度调节
- 材料厚度: 1.5mm/1.5mm
- Product Length: 250mm-550mm
- Dyanamic Loading Capacity: 25kg @ 18"
- Feature: Single Extension, Push to Open, Silent ride, easy assemble/remove
- Adjustment: 2D Height
- Material Thickness: 1.5mm/1.5mm




产品信息 Product Information

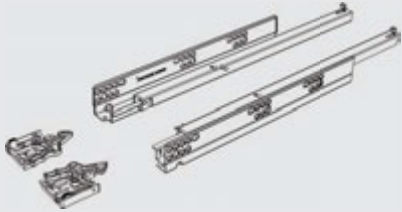套装包装 Completed Packaging

1 全拉出隐藏轨Undermount Slide  包装Pack: 10 付/箱(Sets/CTN)	长度 Length	编号 Part Num#	
	250mm/10in	3901EX-250	4001EX-250
	300mm/12in	3901EX-300	4001EX-300
	350mm/14in	3901EX-350	4001EX-350
	400mm/16in	3901EX-400	4001EX-400
	450mm/18in	3901EX-450	4001EX-450
	500mm/20in	3901EX-500	4001EX-500
	550mm/22in	3901EX-550	4001EX-550
	侧板厚度Drawer Side Thickness	Max. 16mm	Max. 19mm




配件编号 Component Part #	
2 2D快拆把手 2D Locking Bracket 	产品编号 Part Number
	SL-247



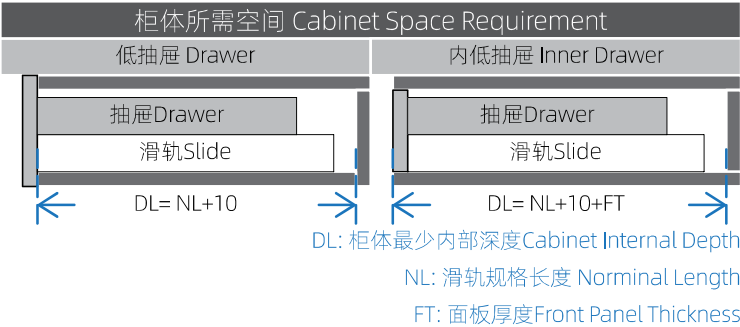




调节把手 | Locking Bracket

型号 Model: 3901EX/4001EX(16B/19B)

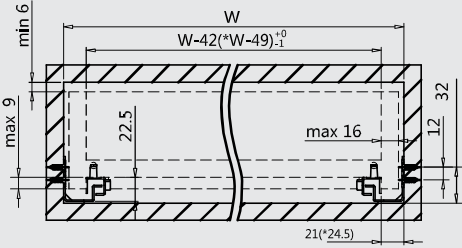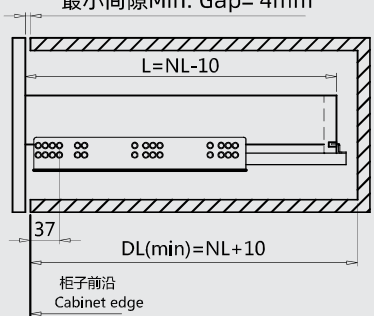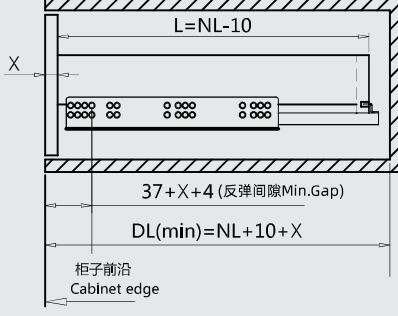安装信息 Installation Information

抽屉所需空间 Drawer Space Requirement	外置面板抽屉Frameless Drawer	内置面板抽屉Inner Drawer
 带*为侧板19mm滑轨安装尺寸 The asterisk number is the installation size of 19mm thickness drawer slide	最小间隙Min. Gap= 4mm 	
W: 柜子内部宽度 Cabinet Internal Width	L: 抽屉深度 Drawer Depth	NL: 滑轨规格长度 Slide Nominal Length
DL: 柜体内部深度 Cabinet Internal Depth	X: 抽屉面板厚度 Front Panel Thickness	

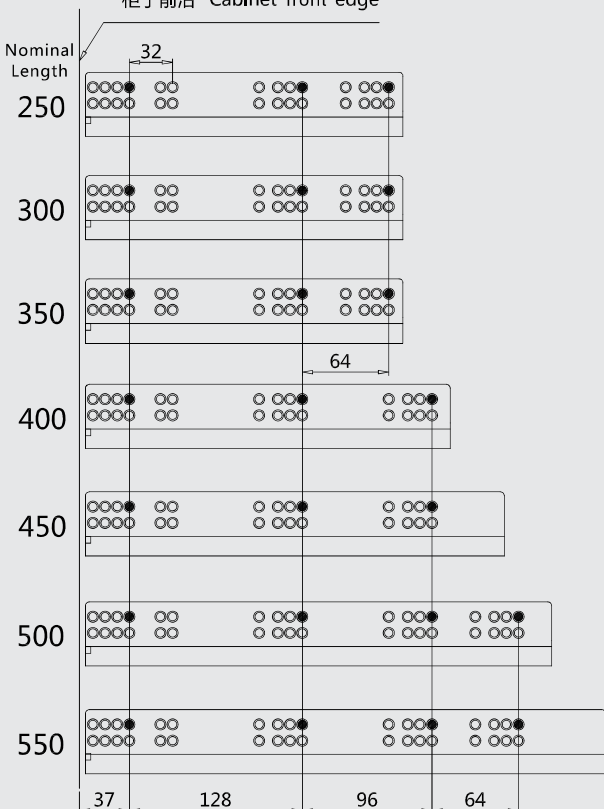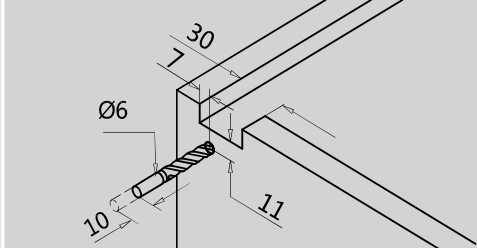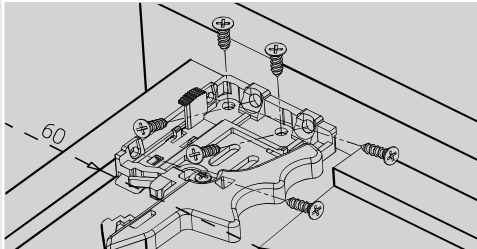滑轨安装孔位 Slide Fixing Postion	抽拉开孔 Drawer Drilling
柜子前沿 Cabinet front edge 	背面 Back Panel 
	把手安装 Bracket Assembly 

平头螺丝 Countersunk Screw	欧标螺丝 Euro Screw	圆头螺丝 Panhead Screw
		

半拉出反弹隐藏轨
Single Extension
Push-Open Undermount Slide



型号 Model: 3905EX/ 4005EX(16B/19B)

调节螺丝 | Locking Pin

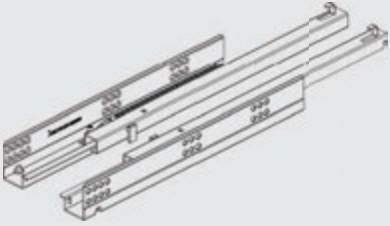


- 长度规格: 250mm-550mm
- 动态负荷: 25kg @ 18"
- 特点: 半展出, 按压弹出, 低噪音滑行, 抽屉免工具快速安装/拆卸
- 调节功能: 螺杆高度调节 0-3mm
- 材料厚度: 1.5mm/1.5mm
- Product Length: 250mm-550mm
- Dyanamic Loading Capacity: 25kg @ 18"
- Feature: Single Extension, Push to Open, Silent ride, easy assemble/remove
- Adjustment: Height 0-3mm
- Material Thickness: 1.5mm/1.5mm




产品信息 Product Information


套装包装 Completed Packaging

1 全拉出隐藏轨Undermount Slide  包装Pack: 10 付/箱(Sets/CTN)	长度 Length	编号 Part Num#	
	250mm/10in	3905EX-250	4005EX-250
	300mm/12in	3905EX-300	4005EX-300
	350mm/14in	3905EX-350	4005EX-350
	400mm/16in	3905EX-400	4005EX-400
	450mm/18in	3905EX-450	4005EX-450
	500mm/20in	3905EX-500	4005EX-500
	550mm/22in	3905EX-550	4005EX-550
	侧板厚度Drawer Side Thickness	Max. 16mm	Max. 19mm

标准配件 Standard Accessories Part

2	插销 Bolt	产品编号 Part Number
		SL-135

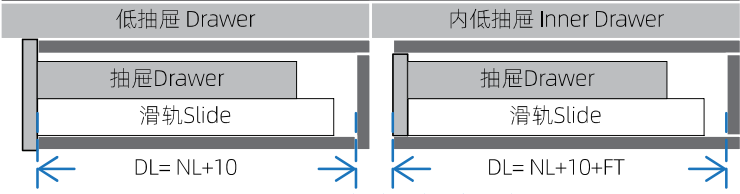柜体所需空间 Cabinet Space Requirement



DL: 柜体最少内部深度Cabinet Internal Depth




NL: 滑轨规格长度 Norminal Length

FT: 面板厚度Front Panel Thickness

调节螺丝 | Locking Pin

型号 Model: 3905EX/4005EX(16B/19B)

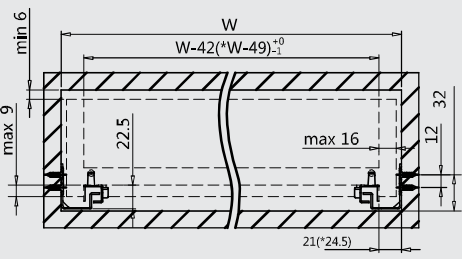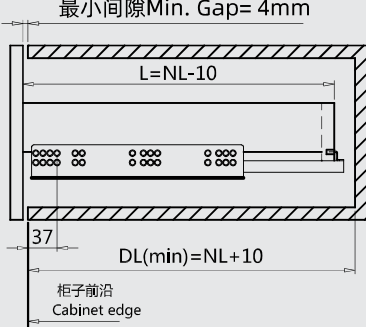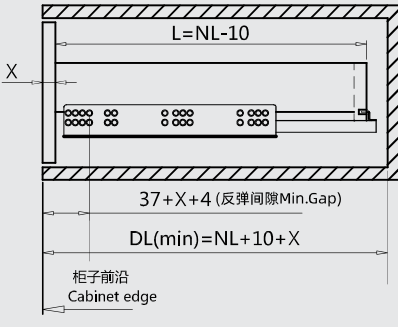安装信息 Installation Information

抽屉所需空间 Drawer Space Requirement	外置面板抽屉Frameless Drawer	内置面板抽屉Inner Drawer
 带*为侧板19mm滑轨安装尺寸 The asterisk number is the installation size of 19mm thickness drawer slide	 最小间隙Min. Gap= 4mm	
W: 柜子内部宽度 Cabinet Internal Width	L: 抽屉深度 Drawer Depth	NL: 滑轨规格长度 Slide Nominal Length
DL: 柜体内部深度 Cabinet Internal Depth	X: 抽屉面板厚度 Front Panel Thickness	

滑轨安装孔位 Slide Fixing Postion

柜子前沿 Cabinet front edge

Nominal Length

250

300

350

400

450

500

550

32

64

37 128 96 64



抽屉开孔 Drawer Drilling

背面 Back Panel

侧板 Drawer Side

抽屉底部 Drawer Bottom

L (mm)	A (mm)	B (mm)
240	188	220
290	213	245
340	238	270
390	273	305
440	298	330
490	323	355
540	358	390

平头螺丝 Countersunk Screw	欧标螺丝 Euro Screw	圆头螺丝 Panhead Screw
		

美式隐藏缓冲隐藏轨
American Style
Soft Closing Undermount Slide



型号 Model: ZX4803/ZX5003(16mm/19mm)

调节把手 | Locking Bracket



- 长度规格: 229mm-533mm
- 动态负荷: 34kg @ 18"
- 特点: 全展出, 缓冲闭合, 低噪音滑行, 抽屉免工具快速安装/拆卸
- 调节功能: 2D 把手高度调节 | 3D 三维调节*
- 材料厚度: 1.8mm/1.5mm/1.0mm
- Product Length: 229mm-533mm
- Dyanamic Loading Capacity: 34kg @ 18"
- Feature: Full Extension, Soft Close, Silent ride, easy assemble/remove
- Adjustment: 2D Height | 3D*
- Material Thickness: 1.8mm/1.5mm/1.0mm



液压式缓冲器
Hydraulic Soft Close Mechanism

产品信息 Product Information

套装包装 Completed Packaging

1

全拉出隐藏轨Undermount Slide



包装Pack: 10 付/箱(Sets/CTN)


长度 Length	编号 Part Num#	
229mm/9in	ZX4803-229	ZX5003-229
305mm/12in	ZX4803-305	ZX5003-305
381mm/15in	ZX4803-381	ZX5003-381
457mm/18in	ZX4803-457	ZX5003-457
533mm/21in	ZX4803-533	ZX5003-533
侧板厚度Drawer Side Thickness	Max. 16mm	Max. 19mm

标准配件 Standard Accessories Part

1	2D快拆把手 2D Locking Bracket	
	产品编号 Part Number	SL-248
	产品编号 Part Number	SL-150
2	美式塑料后托 Plug-in Socket	
	产品编号 Part Number	SL-150
	产品编号 Part Number	SL-267
3*	3D快拆把手 3D Locking Bracket	
	产品编号 Part Number	SL-267

*选配配件 *Optional Part



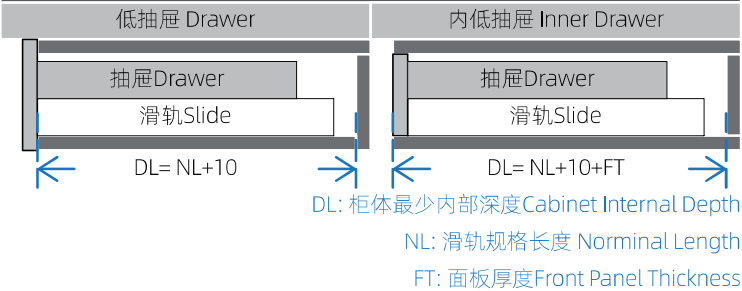
柜体所需空间 Cabinet Space Requirement



调节把手 | Locking Bracket

型号 Model: ZX4803/ZX5003(16mm/19mm)

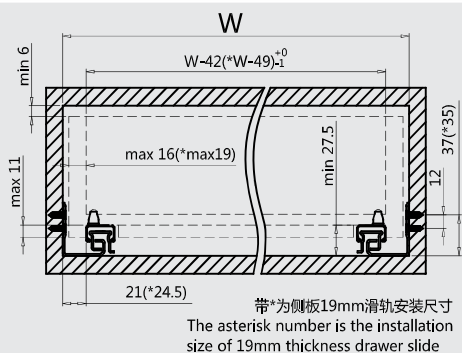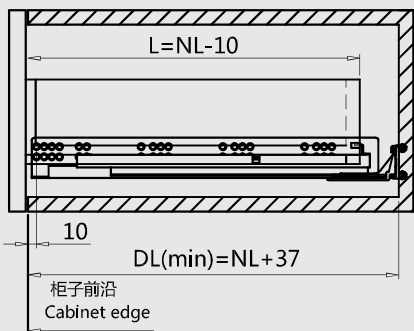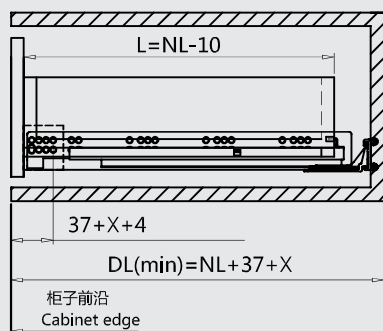安装信息 Installation Information

抽屉所需空间 Drawer Space Requirement	外置面板抽屉Frameless Drawer	内置面板抽屉Inner Drawer
 W: 柜子内部宽度 Cabinet Internal Width DL: 柜体内部深度 Cabinet Internal Depth	 L: 抽屉深度 Drawer Depth X: 抽屉面板厚度 Front Panel Thickness	 NL: 滑轨规格长度 Slide Nominal Length

滑轨安装孔位 Slide Fixing Postion

Nominal Length

229

305

381

457

533

Cabinet edge

A

B

37

产品型号 Assembling dimensions	抽屉长度 (mm) Drawer length	安装孔距 尺寸(mm) Hole distance size	
		A	B
ZX4803(*ZX5003)-229	229	128	
ZX4803(*ZX5003)-305	305	224	
ZX4803(*ZX5003)-381	381	224	96
ZX4803(*ZX5003)-457	457	224	192
ZX4803(*ZX5003)-533	533	224	256

21

14

32

16

3

金属后托 (选配)
Rear mounting bracket
for face frame cabinets

塑料后托(选配)
Adjustable plug-in
socket

抽屉开孔 Drawer Drilling

背面 Back Panel

30



7

Ø6

10

11

把手安装 Bracket Assembly

平头螺丝 Countersunk Screw	欧标螺丝 Euro Screw	圆头螺丝 Panhead Screw
		

美式隐藏缓冲隐藏轨
American Style
Soft Closing Undermount Slide



型号 Model: ZX4805/ZX5005(16mm/19mm)

调节螺丝 | Locking Pin



- 长度规格: 250mm-550mm
- 动态负荷: 34kg @ 18"
- 特点: 美式安装, 全展出, 缓冲闭合, 低噪音滑行, 抽屉免工具快速安装/拆卸
- 调节功能: 螺杆高度调节 0-3mm
- 材料厚度: 1.8mm/1.5mm/1.0mm
- Product Length: 229mm-533mm
- Dyanamic Loading Capacity: 34kg @ 18"
- Feature: Full Extension, Soft Close, Silent ride, easy assemble/remove
- Adjustment: Height 0-3mm
- Material Thickness: 1.8mm/1.5mm/1.0mm



产品信息 Product Information

套装包装 Completed Packaging

1 全拉出隐藏轨Undermount Slide	长度 Length	编号 Part Num#	
	229mm/9in	ZX4805-229	ZX5005-229
	305mm/12in	ZX4805-305	ZX5005-305
	381mm/15in	ZX4805-381	ZX5005-381
	457mm/18in	ZX4805-457	ZX5005-457
	533mm/21in	ZX4805-533	ZX5005-533
包装Pack: 10 付/箱(Sets/CTN)		侧板厚度Drawer Side Thickness	Max. 16mm Max. 19mm

标准配件 Standard Accessories Part

1	插销 Bolt	产品编号 Part Number
		SL-126
2	美式塑料后托 Plug-in Socket	产品编号 Part Number
		SL-150

*选配配件 *Optional Part




柜体所需空间 Cabinet Space Requirement

低抽屉 Drawer	内低抽屉 Inner Drawer
DL= NL+10	DL= NL+10+FT
DL: 柜体最少内部深度Cabinet Internal Depth	
NL: 滑轨规格长度 Norminal Length	
FT: 面板厚度Front Panel Thickness	

调节螺丝 | Locking Pin

型号 Model: ZX4805/ZX5005(16mm/19mm)

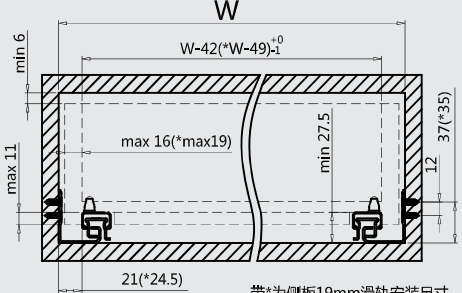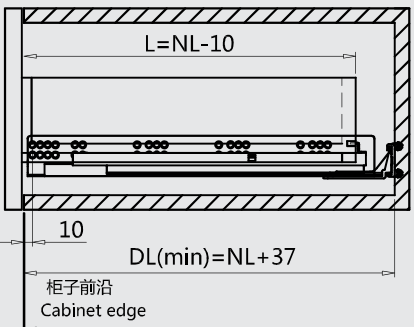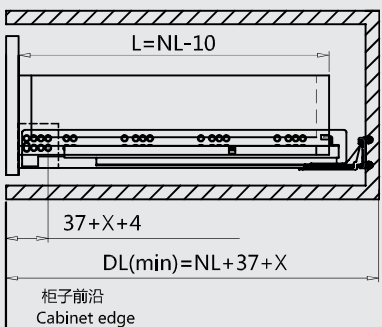安装信息 Installation Information

抽屉所需空间 Drawer Space Requirement	外置面板抽屉Frameless Drawer	内置面板抽屉Inner Drawer
 W: 柜子内部宽度 Cabinet Internal Width DL: 柜体内部深度 Cabinet Internal Depth	 L: 抽屉深度 Drawer Depth X: 抽屉面板厚度 Front Panel Thickness	 NL: 滑轨规格长度 Slide Nominal Length

滑轨安装孔位 Slide Fixing Postion

Nominal Length

柜子前沿 Cabinet edge

229

305

381

457

533

A

B

37

产品型号 Assembling dimensions	抽屉长度 (mm) Drawer length	安装孔距 尺寸(mm) Hole distance size	
		A	B
ZX4803(*ZX5003)-229	229	128	
ZX4803(*ZX5003)-305	305	224	
ZX4803(*ZX5003)-381	381	224	96
ZX4803(*ZX5003)-457	457	224	192
ZX4803(*ZX5003)-533	533	224	256



抽屉开孔 Drawer Drilling

背面 Back Panel

侧板 Drawer Side

抽屉底部 Drawer Bottom



L (mm)	A (mm)	B (mm)
229	162.5	173
305	232.5	243
381	286.5	297.5
457	337	367
533	379	446.5



金属后托 (选配)
Rear mounting bracket
for face frame cabinets



塑料后托(选配)
Adjustable plug-in
socket


平头螺丝 Countersunk Screw	欧标螺丝 Euro Screw	圆头螺丝 Panhead Screw
		

欧式隐藏三节滑轨安装 Instrution Undermount Slide




欧式隐藏三节滑轨安装示意和参数图
带前连接件型 With locking brackets (ZX4801/ZX5001)
带前连接件滑轨安装示意图 The slide with locking brackets installation instruction


- 1 用十字刀将抽屉和滑轨安装好，并将滑轨拉出。
Please install the drawer and slide well,
and keep the slide full extension outside the drawer.



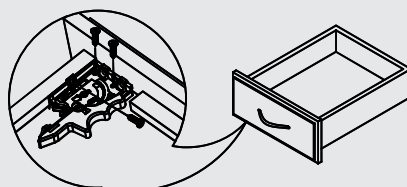
- 2 用十字刀将前连接件安装在抽屉的底部。
The locking brackets be installed on the bottom of the drawer.



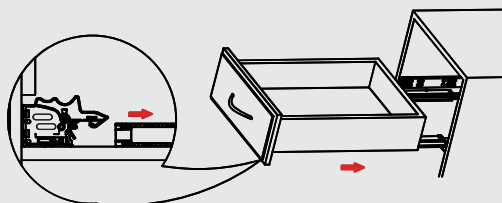- 3 将抽屉平放在滑轨上，向内推到底，动轨卡进连接件中，完成安装。
Please put the drawer flat on the slide, and close the drawer completely. When the slide be connected with the locking brackets, then the installation to be finished.




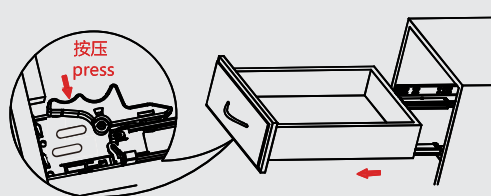- 4 用十字刀将抽屉和滑轨安装好，并将滑轨拉出。
Please install the drawer and slide well,
and keep the slide full extension outside the drawer.




欧式隐藏三节滑轨安装示意和参数图
带固定插销型 With locking pin & Damper (ZX4802/ZX5002)
带固定插销滑轨安装示意图 The slide with locking pin installation instruction

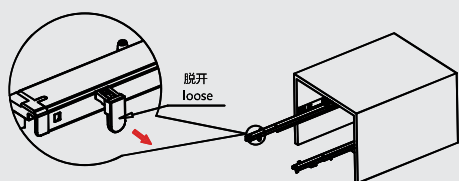
- 1 用十字刀将抽屉和滑轨安装好，并将滑轨拉出。
(注：此时插销应在脱开的位置)
Please install the drawer and slide well, and keep the slide
full extension outside the drawer. (Keep the locking pin be
loose)



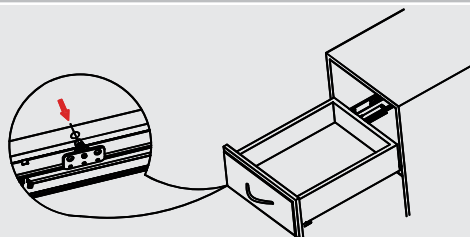
- 2 用十字刀将前连接件安装在抽屉的底部。
The locking brackets be installed on the bottom of the drawer.



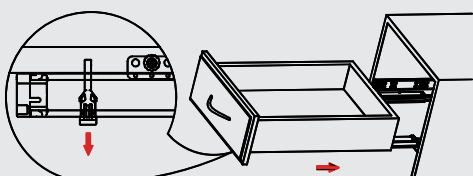- 3 将插销压进抽屉侧板的孔位，固定抽屉，然后向内推进柜体，安装完成。
Press the locking pin into the slide to fix the drawer, and close
the drawer completely.




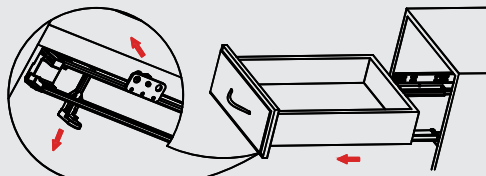- 4 拆卸抽屉时，把插销从抽屉侧板脱开，然后向上提抽屉后往外拉，即可拆卸完成。
Pull out the locking pin from the slide then you can take out the
drawer.




欧式隐藏二节滑轨安装示意和参数图
带前连接件型 With locking brackets (ZX3901/ZX4001)
带前连接件滑轨安装示意图 The slide with locking brackets installation instruction


- 1 用十字刀将抽屉和滑轨安装好，并将滑轨拉出。
Please install the drawer and slide well, and keep the slide full extension outside the drawer.



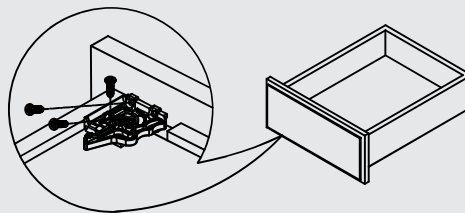
- 2 用十字刀将前连接件安装在抽屉的底部。
The locking brackets be installed on the bottom of the drawer.



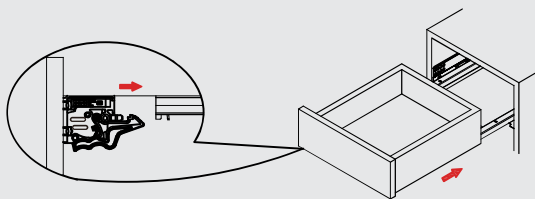- 3 将抽屉平放在滑轨上，向内推到底，动轨卡进连接件中，完成安装。
Please put the drawer flat on the slide, and close the drawer completely. When the slide be connected with the locking brackets, then the installation to be finished.




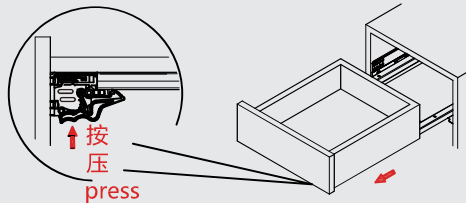- 4 拆卸抽屉时，按压前连接件的把手，然后向外拉，即可拆卸完成。
Press the locking brackets then you can take out the drawer.




欧式隐藏二节滑轨安装示意和参数图
带固定插销型 With locking pin & Damper (ZX3905/ZX4005)
带固定插销滑轨安装示意图 The slide with locking pin installation instruction

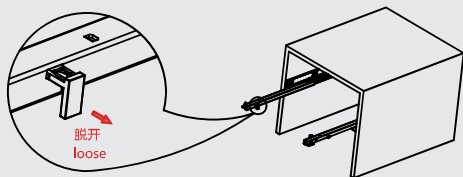
- 1 用十字刀将抽屉和滑轨安装好，并将滑轨拉出。
(注：此时插销应在脱开的位置)
Please install the drawer and slide well, and keep the slide full extension outside the drawer. (Keep the locking pin be loose)



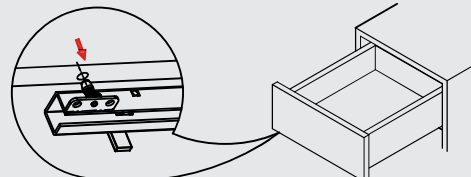
- 2 把抽屉放在滑轨上，并且卡进相应的孔位。
Please put the drawer flat on the slide, to set the screw of the slide into the hole of the drawer.



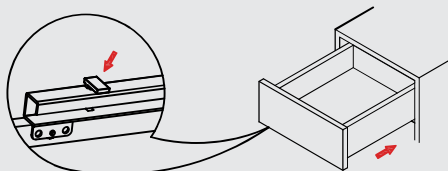- 3 将插销压进抽屉侧板的孔位，固定抽屉，然后向内推进柜体，安装完成。
Press the locking pin into the slide to fix the drawer, and close the drawer completely.



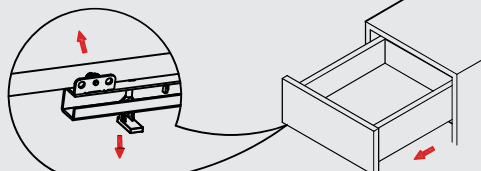- 4 拆卸抽屉时，把插销从抽屉侧板脱开，然后向上提抽屉后往外拉，即可拆卸完成。
Pull out the locking pin from the slide then you can take out the drawer.





钢珠隐藏轨系列
Ball Bearing
Undermount Slide



AGETRAIN 时代列车

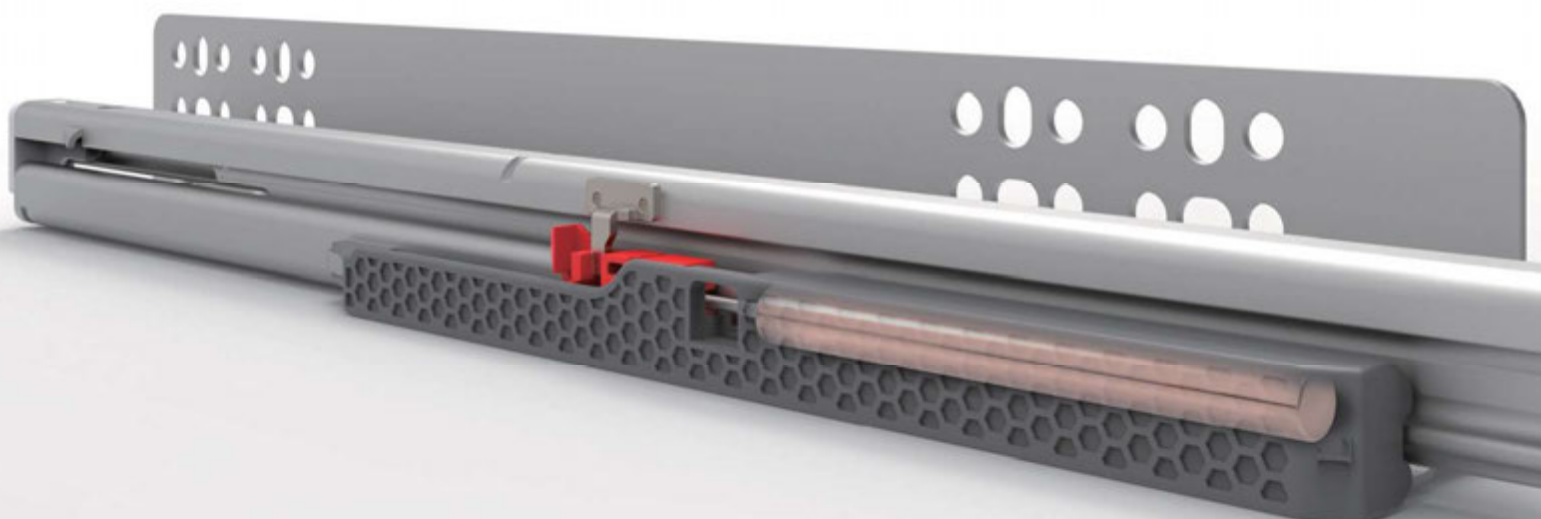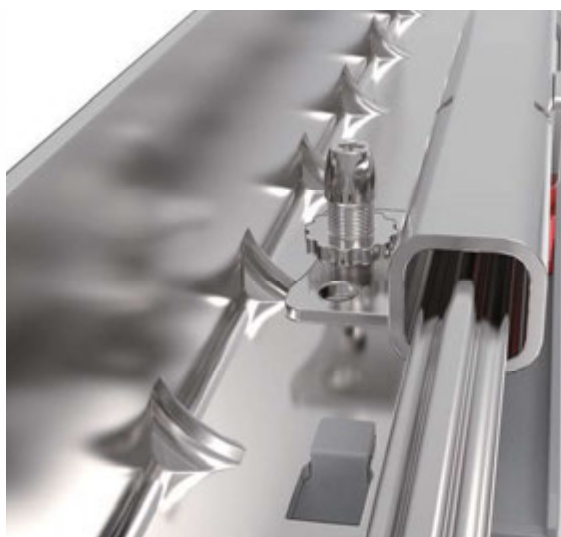HONGLI 鸿丽





半拉出缓冲钢珠隐藏轨
Single Extension Soft Close
Ball Bearing Undermount Slide



型号 Model: 3401 (16mm)

2D调节把手 | Locking Bracket(2D)





- 长度规格: 250mm-550mm
- 动态负荷: 25kg @ 18"
- 特点: 半拉出, 钢珠滚动结构, 缓冲闭合, 低噪音滑行
- 调节功能: 快拆把手固定, 把手高度调节0-3mm
- 材料厚度: 1.5mm/1.5mm
- Product Length: 250mm-550mm
- Dyanamic Loading Capacity: 25kg @ 18"
- Feature: Single Extension, Ball Bearing , Soft Close, Silent ride
- Adjustment: Quick Release Bracket, Height adjustment 0-3mm
- Material Thickness: 1.5mm/1.5mm



液压缓冲器
Hydraulic Soft Close Device

产品信息 Product Information

尺寸-编号 Size-Part Num#		
1 钢珠隐藏轨BB.Undermount Slide  包装Pack: 10 付/箱(Sets/CTN)	长度 Length	编号 Part Num#
	250mm/10in	3401-250
	300mm/12in	3401-300
	350mm/14in	3401-350
	380mm/15in	3401-380
	400mm/16in	3401-400
	450mm/18in	3401-450
	500mm/20in	3401-500
	550mm/22in	3401-550
侧板厚度Drawer Side Thickness		Max. 16mm

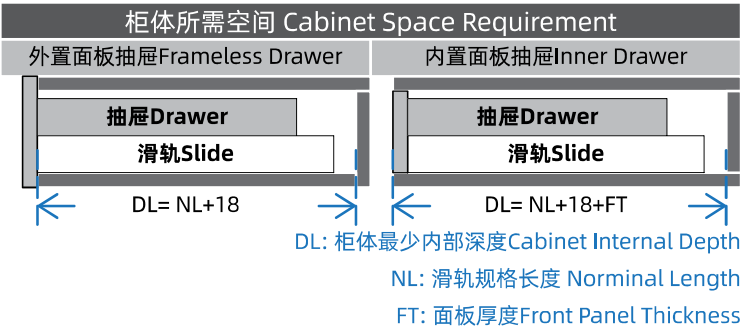




型号 Model: 3401 (16mm)

抽屜所需空間
Drawer Space Requirement



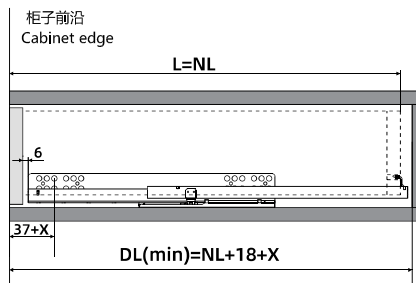
内置面板抽屉Inner Drawer




NL: 滑轨规格长度 Slide Nominal Lenght

X: 抽展面板厚度Front Panel Thickness

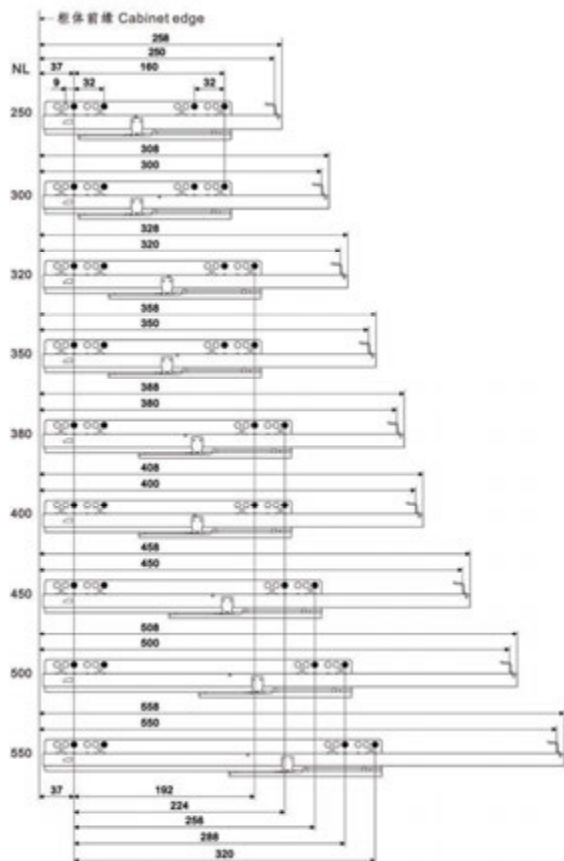
抽屉开孔Drawer Drilling





正视图Front View

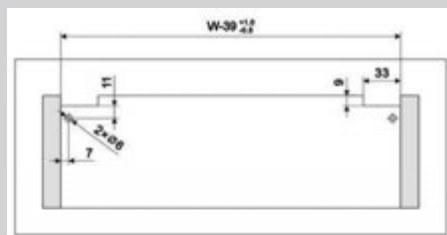

顶视图Top View

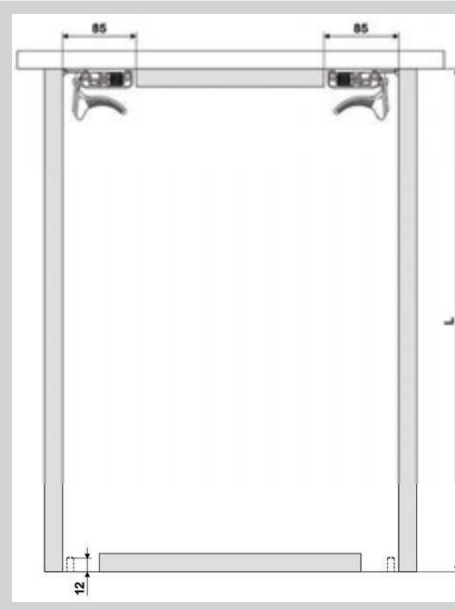

圆头螺丝
Panhead Screw



半拉出缓冲钢珠隐藏轨
Single Extension Soft Close
Ball Bearing Undermount Slide



型号 Model: 3402 (16mm)


调节螺丝 | Adjustment Screw




- 长度规格: 250mm-550mm
- 动态负荷: 25kg @ 18"
- 特点: 半拉出, 钢珠滚动结构, 缓冲闭合, 低噪音滑行
- 调节功能: 插销固定, 螺杆高度调节0-3mm
- 材料厚度: 1.5mm/1.5mm
- Product Length: 250mm-550mm
- Dyanamic Loading Capacity: 25kg @ 18"
- Feature: Single Extension, Ball Bearing , Soft Close, Silent ride
- Adjustment: Pin Lock, Height adjustment screw 0-3mm
- Material Thickness: 1.5mm/1.5mm



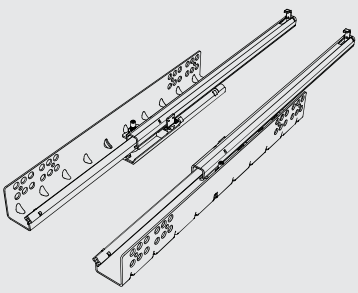产品信息 Product Information




尺寸-编号 Size-Part Num#		
1 钢珠隐藏轨BB.Undermount Slide  包装Pack: 10 付/箱(Sets/CTN)	长度 Length	编号 Part Num#
	250mm/10in	3402-250
	300mm/12in	3402-300
	350mm/14in	3402-350
	380mm/15in	3402-380
	400mm/16in	3402-400
	450mm/18in	3402-450
	500mm/20in	3402-500
	550mm/22in	3402-550
侧板厚度Drawer Side Thickness		Max. 16mm

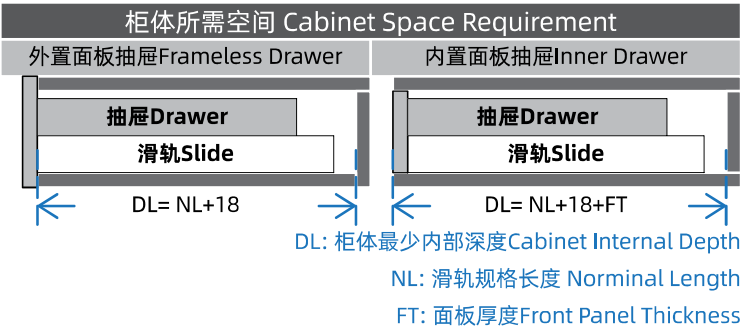

调节螺丝 | Adjustment Screw

型号 Model: 3402 (16mm)

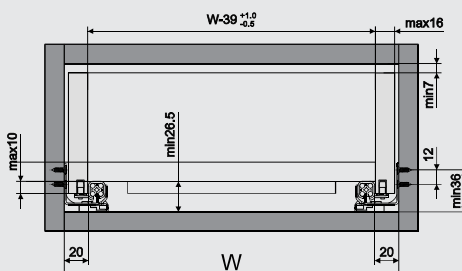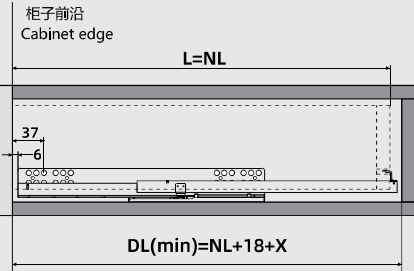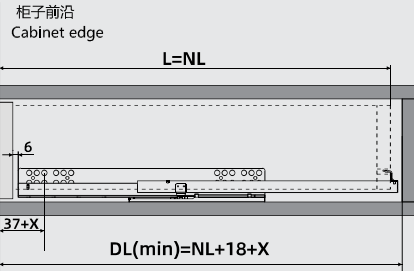安装信息 Installation Information

抽屉所需空间 Drawer Space Requirement	外置面板抽屉Frameless Drawer	内置面板抽屉Inner Drawer
		
W: 柜体内部宽度 Cabinet Internal Width	L: 抽屉深度 Drawer Depth	NL: 滑轨规格长度 Slide Nominal Length
DL: 柜体内部深度 Cabinet Internal Depth	X: 抽屉面板厚度 Front Panel Thickness	

滑轨安装孔位 Slide Fixing Postion		抽屉开孔Drawer Drilling	
← 柜子前沿 Cabinet front edge NL 250 300 350 380 400 450 500 550 37 9 32 160 32 192 224 256 288 320		正视图Front View 7 2×Ø6 6 33 11 W-39 $\begin{smallmatrix} +1.0 \\ -0.5 \end{smallmatrix}$ 顶视图Top View 2×Ø6 6 L A 12	
平头螺丝 Countersuck Screw Ø7.0 14 Ø4.0		圆头螺丝 Panhead Screw Ø8.0 11 Ø6.0	

全拉出缓冲钢珠隐藏轨
Full Extension Soft Close
Ball Bearing Undermount Slide



型号 Model: 4201 (16mm)

2D调节把手 | Locking Bracket(2D)





- 长度规格: 250mm-550mm
- 动态负荷: 30kg @ 18"
- 特点: 全拉出, 钢珠滚动结构, 缓冲闭合, 低噪音滑行
- 调节功能: 快拆把手固定, 把手高度调节0-3mm
- 材料厚度: 1.5mm/1.5mm/1.5mm
- Product Length: 250mm-550mm
- Dyanamic Loading Capacity: 30kg @ 18"
- Feature: Full Extension, Ball Bearing , Soft Close, Silent ride
- Adjustment: Quick Release Bracket, Height adjustment 0-3mm
- Material Thickness: 1.5mm/1.5mm/1.5mm



液压缓冲器
Hydraulic Soft Close Device

产品信息 Product Information

尺寸-编号 Size-Part Num#		
1 钢珠隐藏轨BB.Undermount Slide  包装Pack: 10 付/箱(Sets/CTN)	长度 Length	编号 Part Num#
	250mm/10in	4201-250
	300mm/12in	4201-300
	350mm/14in	4201-350
	380mm/15in	4201-380
	400mm/16in	4201-400
	450mm/18in	4201-450
	500mm/20in	4201-500
	550mm/22in	4201-550
侧板厚度Drawer Side Thickness		Max. 16mm

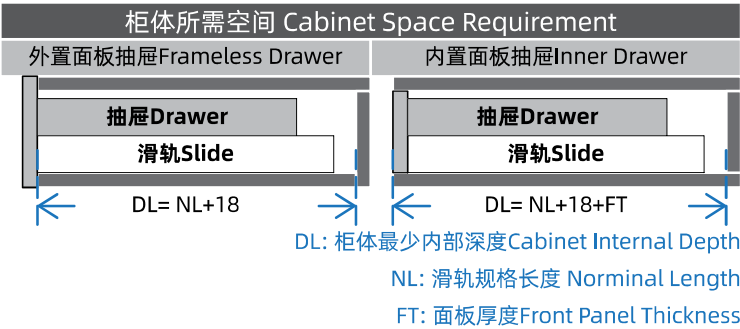

调节螺丝 | Adjustment Screw

型号 Model: 4202 (16mm)




- 长度规格: 250mm-550mm
- 动态负荷: 30kg @ 18"
- 特点: 全拉出, 钢珠滚动结构, 缓冲闭合, 低噪音滑行
- 调节功能: 高度调节0-3mm
- 材料厚度: 1.5mm/1.5mm/1.5mm
- Product Length: 250mm-550mm
- Dyanamic Loading Capacity: 30kg @ 18"
- Feature: Full Extension, Ball Bearing, Soft Close, Silent ride
- Adjustment: Pin Lock, Height adjustment screw 0-3mm
- Material Thickness: 1.5mm/1.5mm/1.5mm




产品信息 Product Information

尺寸-编号 Size-Part Num#

1 钢珠隐藏轨BB.Undermount Slide	长度 Length	编号 Part Num#
	250mm/10in	4202-250
	300mm/12in	4202-300
	350mm/14in	4202-350
	380mm/15in	4202-380
	400mm/16in	4202-400
	450mm/18in	4202-450
	500mm/20in	4202-500
	550mm/22in	4202-550
	包装Pack: 10 付/箱(Sets/CTN)	侧板厚度Drawer Side Thickness Max. 16mm



柜体所需空间 Cabinet Space Requirement

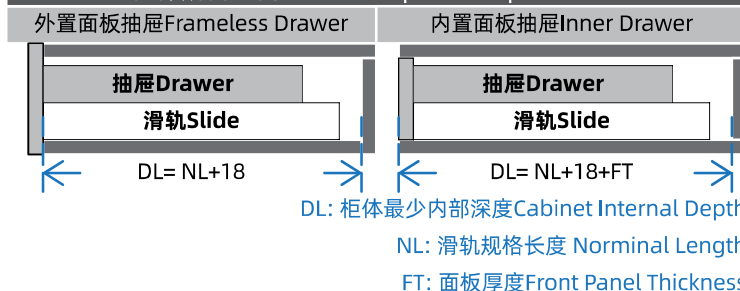

45MM 反弹+缓冲三节钢珠轨
Push To Open with Soft Close
Full Extension Ball Bearing Slide



型号 Model: 4581

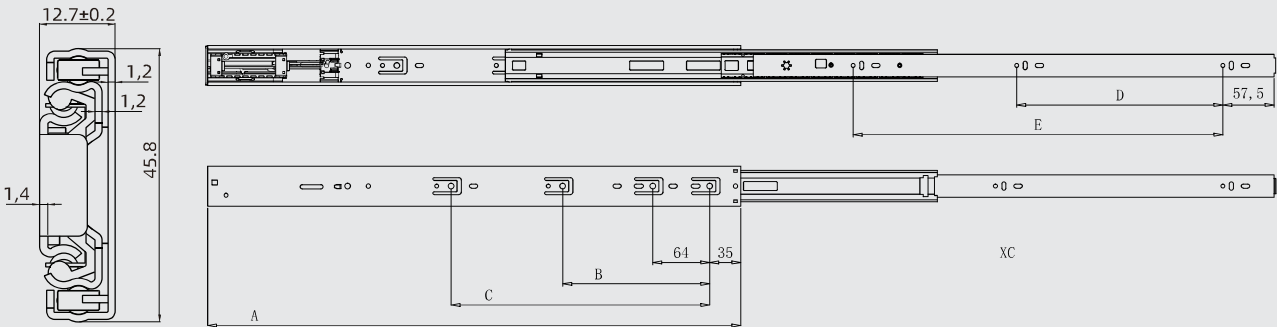
三节全拉出 Full Extension



·长度范围：300-600mm(12" -24")
·承载重量：30kg/18"
·使用寿命：50000次开合
·颜色：蓝锌/黑色
·材料厚度：1.2/1.2/1.4mm

·Length Range:300-600mm(12" -24")
·Loading Capacity: 30kg/18"
·Life Span: 50000 times open and close
·Color: Blue Zinc/Black
·Material Thickness: 1.2/1.2/1.4mm

图纸说明 Drawing description



规格	型号	A0-0.3	B±0.2	C±0.2	D±0.2	E±0.2	XC±3	
10"	4565-250HH	250	/	/	/	/	127	
12"	4565-300HH	300	/	/	64	/	255	
14"	4565-350HH	350	/	/	96	/	340	
16"	4565-400HH	400	192	/	160	/	390	
18"	4565-450HH	450	224	/	160	/	440	
20"	4565-500HH	500	224	/	192	/	500	
22"	4565-550HH	550	224	320	224	/	550	
24"	4565-600HH	600	224	352	256	416	600	

5万次
←→
寿命保证



45MM三节缓冲钢珠轨
SoftClose
Ball Bearing Slide



型号 Model: 4565

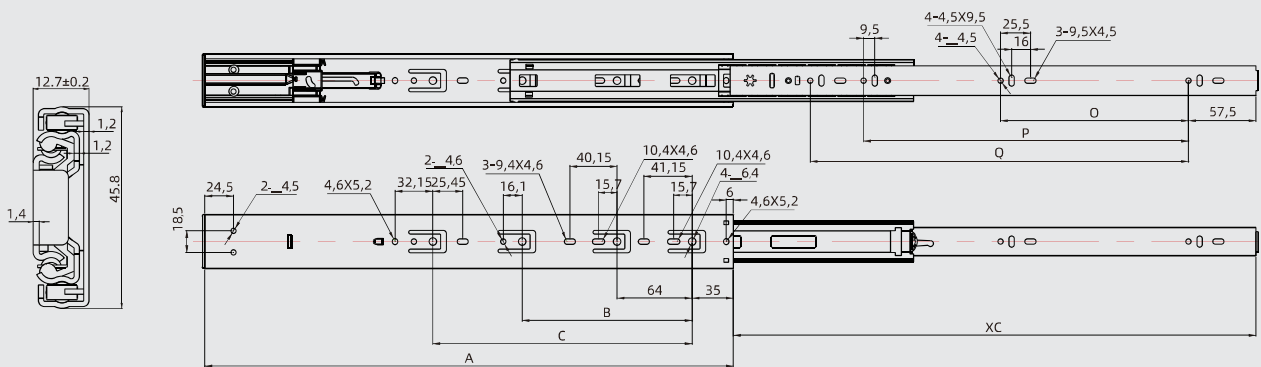
三节全拉出 Full Extension



- 长度范围: 300-600mm(12" -24")
- 承载重量: 30kg/18"
- 使用寿命: 50000次开合
- 颜色: 蓝锌/黑色
- 材料厚度: 1.2/1.2/1.4mm


- Length Range:300-600mm(12" -24")
- Loading Capacity: 30kg/18"
- Life Span: 50000 times open and close
- Color: Blue Zinc/Black
- Material Thickness: 1.2/1.2/1.4mm

图纸说明 Drawing description



规格	型号	A0-0.3	B±0.2	C±0.2	XC±3	O±0.2	P±0.2	Q±0.2
12"	4565-300HH	300	/	/	261	64	/	/
14"	4565-350HH	350	/	/	345	96	/	/
16"	4565-400HH	400	192	/	395	160	/	/
18"	4565-450HH	450	224	/	445	160	/	/
20"	4565-500HH	500	224	320	500	192	/	/
22"	4565-550HH	550	224	352	550	224	352	/
24"	4565-600HH	600	224	/	600	256	/	416

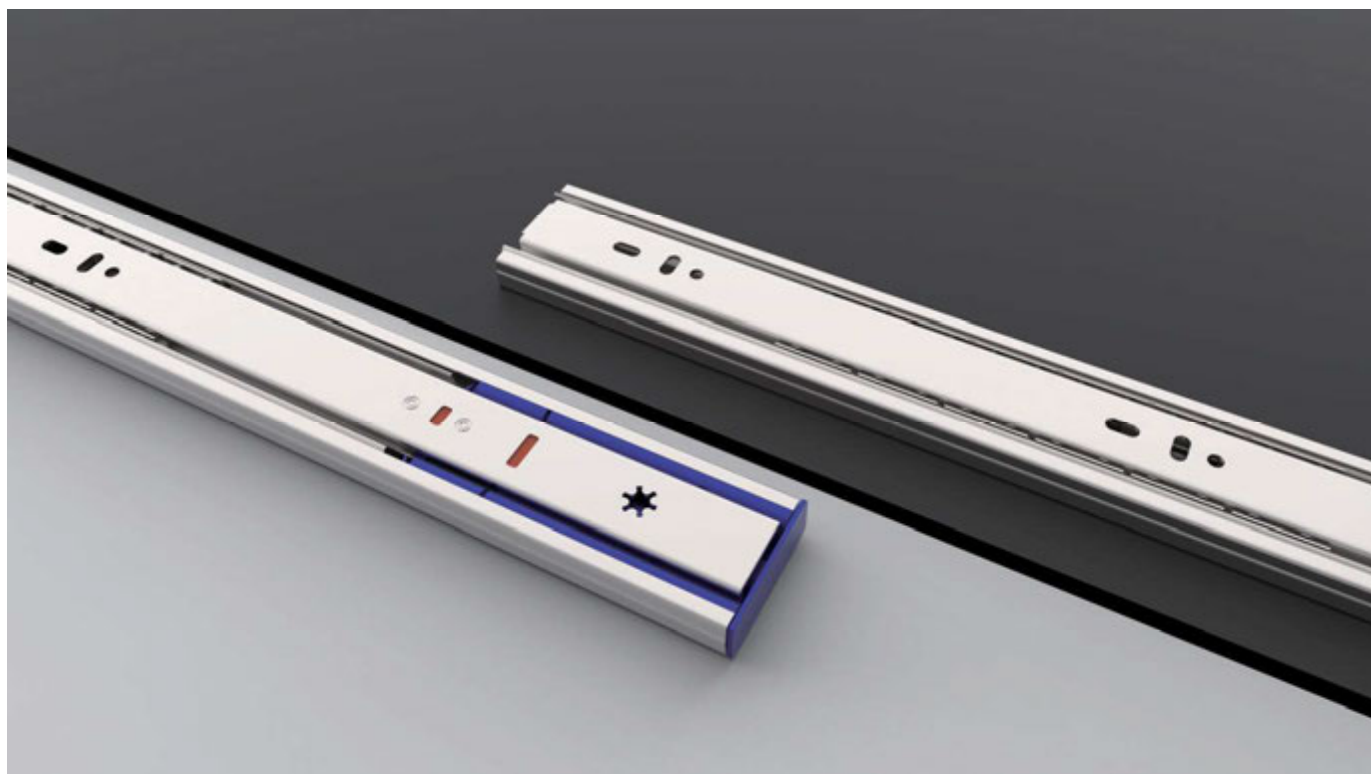型号 Model: 4565



45MM三节反弹钢珠轨
Push-Open
Ball Bearing Slide



型号 Model: 4558

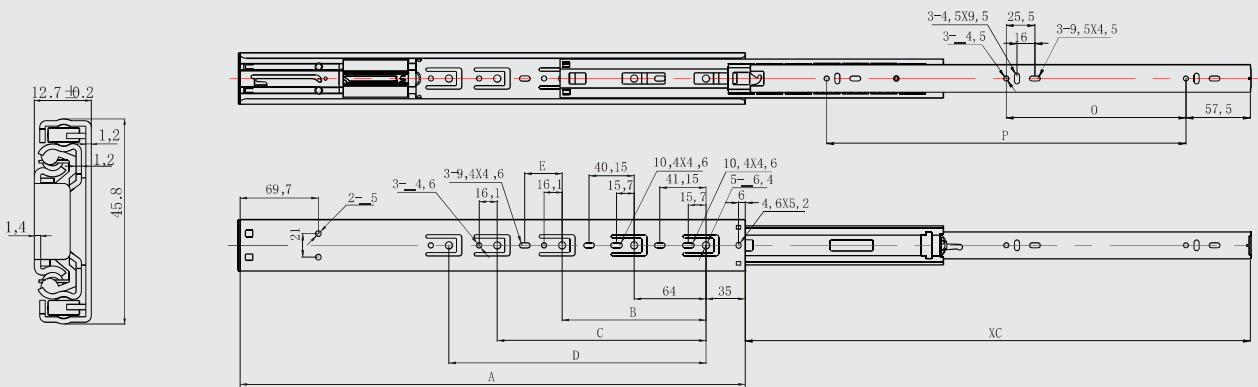
三节全拉出 Full Extension



- 长度范围: 300-600mm(12" -24")
- 承载重量: 30kg/18"
- 使用寿命: 50000次开合
- 颜色: 蓝锌/黑色
- 材料厚度: 1.2/1.2/1.4mm

- Length Range:300-600mm(12" -24")
- Loading Capacity: 30kg/18"
- Life Span: 50000 times open and close
- Color: Blue Zinc/Black
- Material Thickness: 1.2/1.2/1.4mm

图纸说明 Drawing description



规格	型号	A0-0.3	B±0.2	C±0.2	D±0.2	E±0.2	XC±3	O±0.2	P±0.2
12"	4558-300HH	300	/	/	/	/	295	96	214.5
14"	4558-350HH	350	128	/	/	/	350	128	256
16"	4558-400HH	400	192	/	/	/	400	160	288
18"	4558-450HH	450	224	/	/	/	450	160	320
20"	4558-500HH	500	224	288	/	/	500	192	384
22"	4558-550HH	550	224	320	/	50	550	224	416
24"	4558-600HH	600	224	320	384	/	600	256	480

型号 Model: 4558



5万^次
寿命保证

按压反弹





型号 Model: 5301

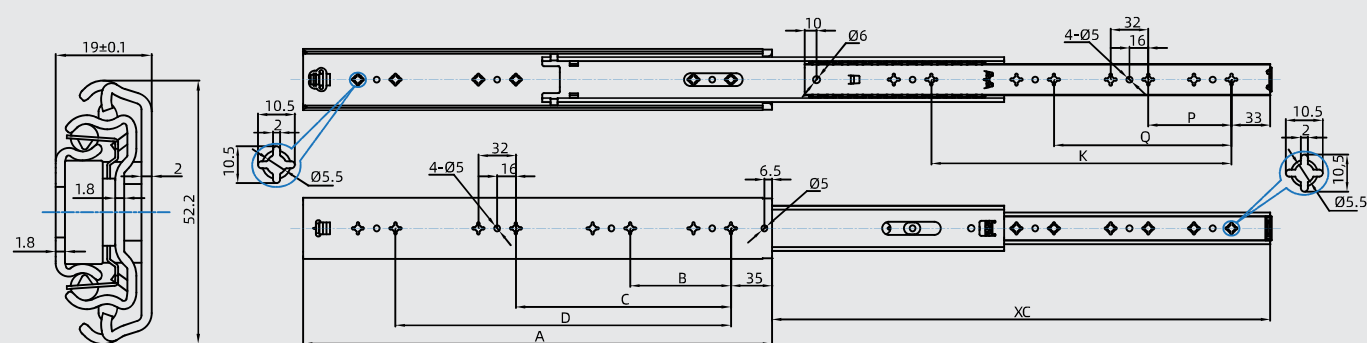
三节全拉出 Full Extension



- 长度范围： 300-750mm(12" -30")
- 承载重量： 100kg/18"
- 使用寿命： 50000次开合
- 颜色： 蓝锌
- 材料厚度： 2.0/2.0/1.8mm

- Length Range: 300-600mm (12" - 24")
- Loading Capacity: 100kg/18"
- Life Span: 50000 times open and close
- Color: Blue Zinc
- Material Thickness: 2.0/2.0/1.8mm

图纸说明 Drawing description



规格S	型号Code	A0-0.3	B±0.2	C±0.2	D±0.2	XC±3	P±0.2	Q±0.2	K±0.2
12"	5301-300	300	160	/	/	325	160	/	/
14"	5301-350	350	224	/	/	375	224	/	/
16"	5301-400	400	128	256	/	425	128	256	/
18"	5301-450	450	160	320	/	475	160	320	/
20"	5301-500	500	192	352	/	525	192	352	/
22"	5301-550	550	192	416	/	575	192	416	/
24"	5301-600	600	256	480	/	625	256	480	/
26"	5301-650	650	256	512	/	675	256	512	/
28"	5301-700	700	288	576	/	725	288	576	/



53Heavy Duty Slide
53重型滑轨

100 KG承重
全进口生产设备

45MM三节普通钢珠轨
45MM Normal
Ball Bearing Slide



型号 Model: 4501

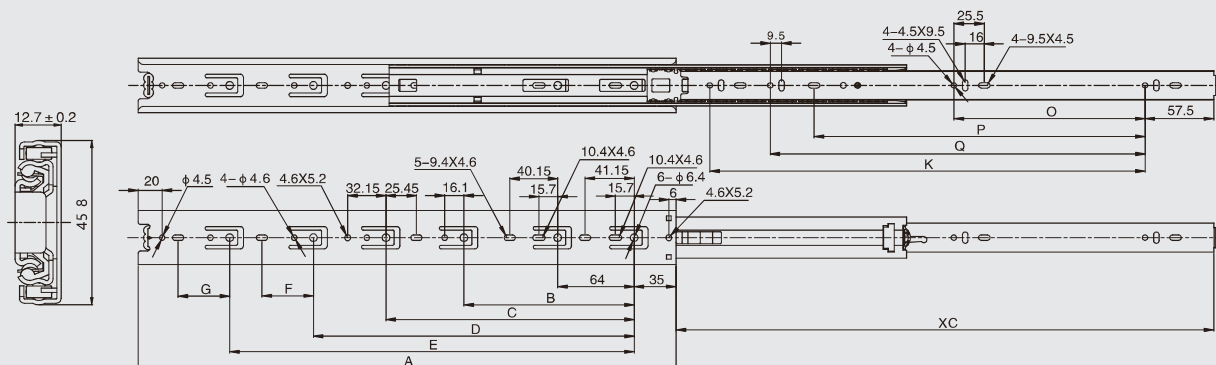
三节全拉出 Full Extension



- 长度范围: 200-600mm(8" -24")
- 承载重量: 45kg/18"
- 使用寿命: 50000次开合
- 颜色: 蓝锌/黑色
- 材料厚度: 1.2/1.2/1.4mm或1.0/1.0/1.2mm

- Length Range: 200-600mm(8" -24")
- Loading Capacity: 45kg/18"
- Life Span: 50000 times open and close
- Color: Blue Zinc/Black
- Material Thickness: 1.2/1.2/1.4mm or 1.0/1.0/1.2mm

图纸说明 Drawing description



规格	型号	A±0.3	B±0.2	C±0.2	D±0.2	E±0.2	F±0.2	G±0.2	XC±3	O±0.2	P±0.2	Q±0.2	K±0.2
8"	4501-200	200	116	/	/	/	/	/	200	/	126	/	/
10"	4501-250	250	148	/	/	/	/	/	250	/	/	176	/
12"	4501-300	300	224	/	/	/	/	/	300	96	/	/	224
14"	4501-350	350	/	/	224	/	50	/	350	128	/	/	256
16"	4501-400	400	224	/	288	/	/	/	400	160	/	/	320
18"	4501-450	450	224	352	/	/	/	/	450	160	/	/	352
20"	4501-500	500	224	352	416	/	/	/	500	192	/	/	416
22"	4501-550	550	224	352	416	/	50	/	550	224	/	/	448
24"	4501-600	600	224	352	480	/	50	/	600	256	/	/	512

型号 Model: 3765

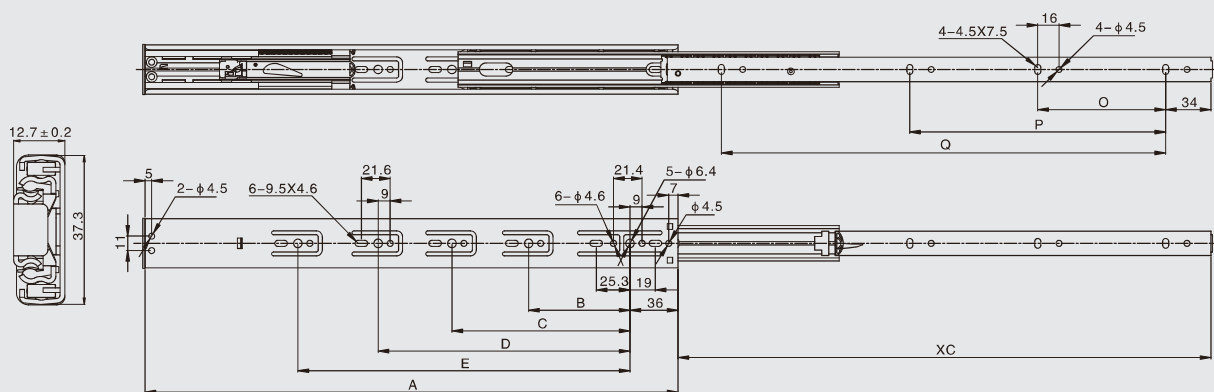
三节全拉出 Full Extension



·Length Range: 300-600mm(12" -24")
·Loading Capacity: 25kg/18"
·Life Span: 50000 times open and close
·Color: Blue Zinc/Black
·Material Thickness: 1.2/1.2/1.2mm

·长度范围: 300-600mm(12" -24")
·承载重量: 25kg/18"
·使用寿命: 50000次开合
·颜色: 蓝锌/黑色
·材料厚度: 1.2/1.2/1.2mm

图纸说明 Drawing description



规格	型号		B±0.2	C±0.2	D±0.2	E±0.2	XC±3	O±0.2	P±0.2	Q±0.2
12"	3763-300	300	128	/	/	/	300	96	224	/
14"	3763-350	350	160	/	/	/	350	128	288	/
16"	3763-400	400	96	192	/	/	400	160	320	/
18"	3763-450	450	128	256	/	/	450	160	352	/
20"	3763-500	500	160	320	/	/	500	128	256	416
22"	3763-550	550	128	256	384	/	550	128	256	480
24"	3763-600	600	128	256	416	/	600	160	288	512

37MM普通钢珠轨
37MM Normal
Ball Bearing Slide



型号 Model: 3701

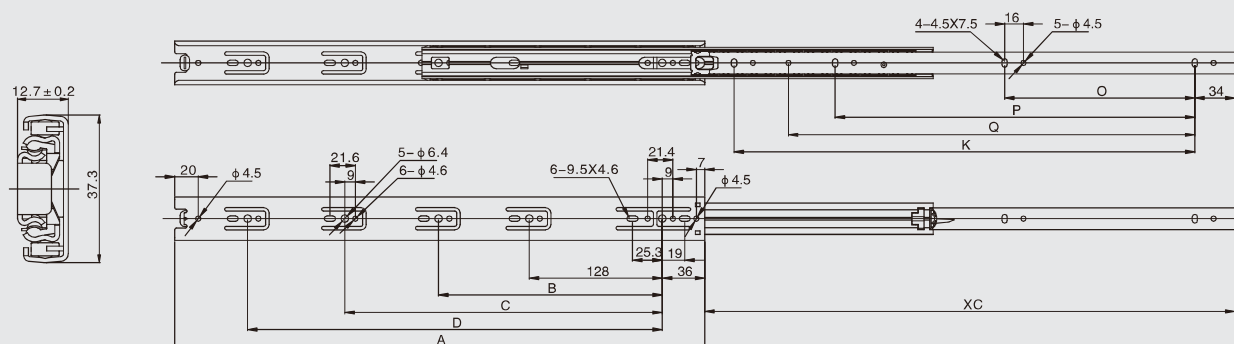
三节全拉出 Full Extension



·长度范围: 200-600mm(8" -24")
·承载重量: 35kg/18"
·使用寿命: 50000次开合
·颜色: 蓝锌/黑色
·材料厚度: 1.2/1.2/1.2mm

·Length Range: 200-600mm(8" -24")
·Loading Capacity: 35kg/18"
·Life Span: 50000 times open and close
·Color: Blue Zinc/Black
·Material Thickness: 1.2/1.2/1.2mm

图纸说明 Drawing description



规格	型号		B±0.2	C±0.2	D±0.2	XC±3	O±0.2	P±0.2	Q±0.2	Q±0.2
8"	3701-200	200	/	/	/	200	64	/	148	/
10"	3701-250	250	/	/	/	250	96	192	/	/
12"	3701-300	300	224	/	/	300	128	224	/	/
14"	3701-350	350	224	/	/	350	128	288	/	/
16"	3701-400	400	224	320	/	400	160	320	/	/
18"	3701-450	450	224	352	/	450	192	288	/	384
20"	3701-500	500	224	416	/	500	192	320	/	416
22"	3701-550	550	224	352	448	550	192	352	/	480
24"	3701-600	600	224	352	480	600	192	384	/	512

三节全拉出 Full Extension

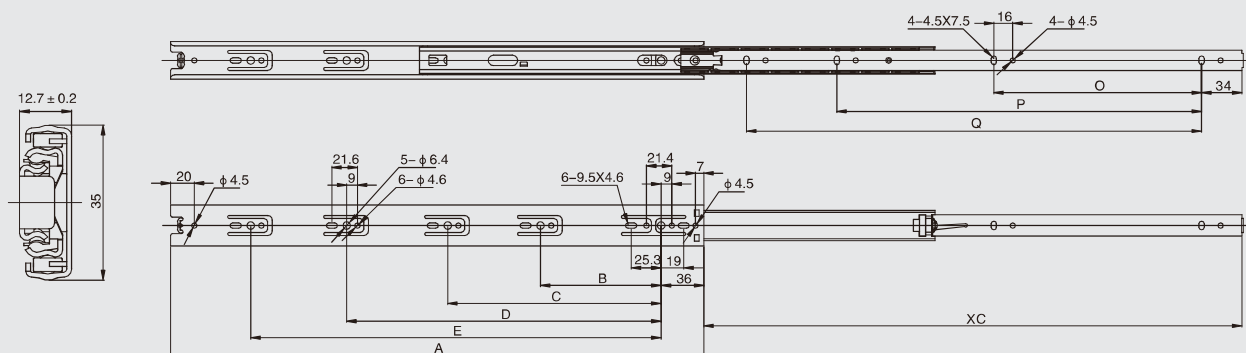
型号 Model: S3501



·Length Range: 250-600mm(12" -24")
·Loading Capacity: 20kg/18"
·Life Span: 50000 times open and close
·Color: Blue Zinc/Black
·Material Thickness: 1.0/1.0/1.2mm

·长度范围: 250-600mm(12" -24")
·承载重量: 20kg/18"
·使用寿命: 50000次开合
·颜色: 蓝锌/黑色
·材料厚度: 1.0/1.0/1.2mm

图纸说明 Drawing description



规格	型号	A±0.3	B±0.2	C±0.2	D±0.2	E±0.2	XC±3	O±0.2	P±0.2	Q±0.2
10"	S3501-250	250	128	/	/	/	253	96	192	/
12"	S3501-300	300	128	224	/	/	304	128	224	/
14"	S3501-350	350	128	224	/	/	353	128	288	/
16"	S3501-400	400	128	224	320	/	403	160	320	/
18"	S3501-450	450	128	224	352	/	453	192	288	384
20"	S3501-500	500	128	224	416	/	503	192	320	416
22"	S3501-550	550	128	224	352	448	553	192	352	480
24"	S3501-600	600	128	224	352	480	603	192	384	512

35MM普通钢珠轨 35MM Normal Ball Bearing Slide



型号 Model: 3501

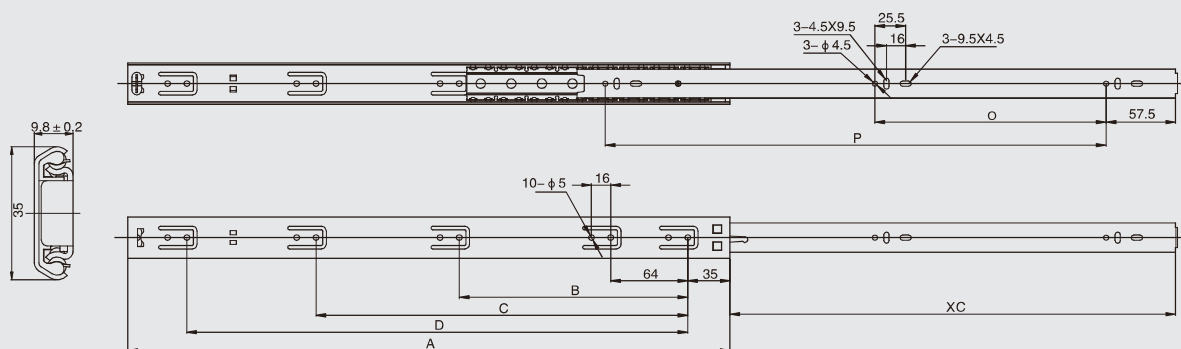
两节半拉出 Single Extension



·长度范围：200-600mm(8"-24")
·承载重量：25KG/18"
·使用寿命：50000次（正常承重下）
·颜色：蓝锌/黑色
·厚度：1.2/1.2mm
·包装：30付/箱

·Length Range : 200-600mm(8"-24")
·Loading weight : 25KG/18"
·Life span : 50000 times
·Color : blue zinc/black
·Thinckness : 1.2/1.2mm
·Pack : 30pairs/carton


图纸说明 Drawing description



规格	型号	A±0.3	B±0.2	C±0.2	D±0.2	XC±3	O±0.2	P±0.2
10"	3501-250	250	160	/	/	155	176	/
12"	3501-300	300	224	/	/	202	96	224
14"	3501-350	350	256	/	/	250	128	272
16"	3501-400	400	224	320	/	295	160	320
18"	3501-450	450	224	352	/	330	160	352
20"	3501-500	500	224	416	/	370	192	416
22"	3501-550	550	224	448	/	407	224	448
24"	3501-600	600	224	480	/	445	224	512

两节半拉出 Single Extension

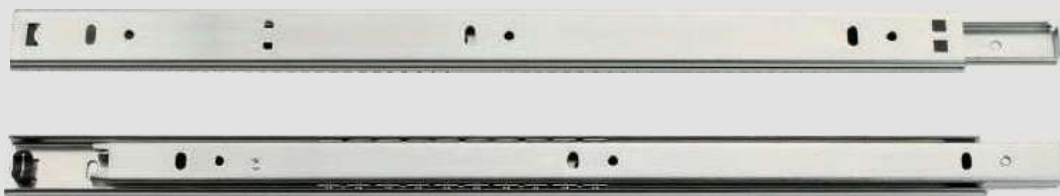
型号 Model: 2701



·长度范围：200-600mm(8"-24")
·承载重量：15KG/18"
·使用寿命：50000次（正常承重下）
·颜色：蓝锌/黑色
·厚度：1.2/1.2mm
·包装：40付/箱

·Length Range : 200-600mm(8"-24")
·Loading weight : 15KG/18"
·Life span : 50000 times
·Color : blue zinc/black
·Thickness : 1.2/1.2mm
·Pack : 40pairs/carton

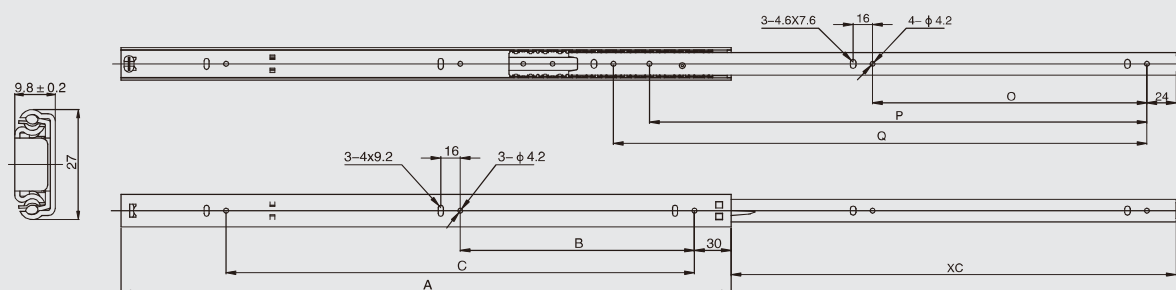图纸说明 Drawing description



规格	型号	A±0.3	B±0.2	C±0.2	XC±3	O±0.2	XC±3	O±0.2
8"	2705-200	200	128	/	140	64	160	/
10"	2705-250	250	64	160	177	96	210	/
12"	2705-300	300	96	192	215	128	256	/
14"	2705-350	350	128	256	252	128	/	288
16"	2705-400	400	160	320	290	160	/	320
18"	2705-450	450	192	352	327	192	/	384
20"	2705-500	500	192	384	365	224	/	416
22"	2705-550	550	224	416	402	224	/	448
24"	2705-600	600	256	448	440	256	/	480

HONGLI
HARDWARE
鸿丽五金

专业家居五金供应商
Professional Household Hardware Supplier



AGETRAIN 时代列车

**Leading the AGE · 引领时代
Since 1993**

广东鸿丽金属制品有限公司

GUANGDONG HONGLI HARDWARE CO., LTD

佛山市顺德区勒流镇港口路众涌工业区5-2号
Zone5-2 ZhongChong Industrial Gangkou Road,
Leliu, Shunde District, Foshan,
Guangdong, China.

Phone: +86-757-2552-3396 Fax: +86-757-2566-8909

Web: www.honglead.cn | Email: info@honglead.cn